



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 687

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

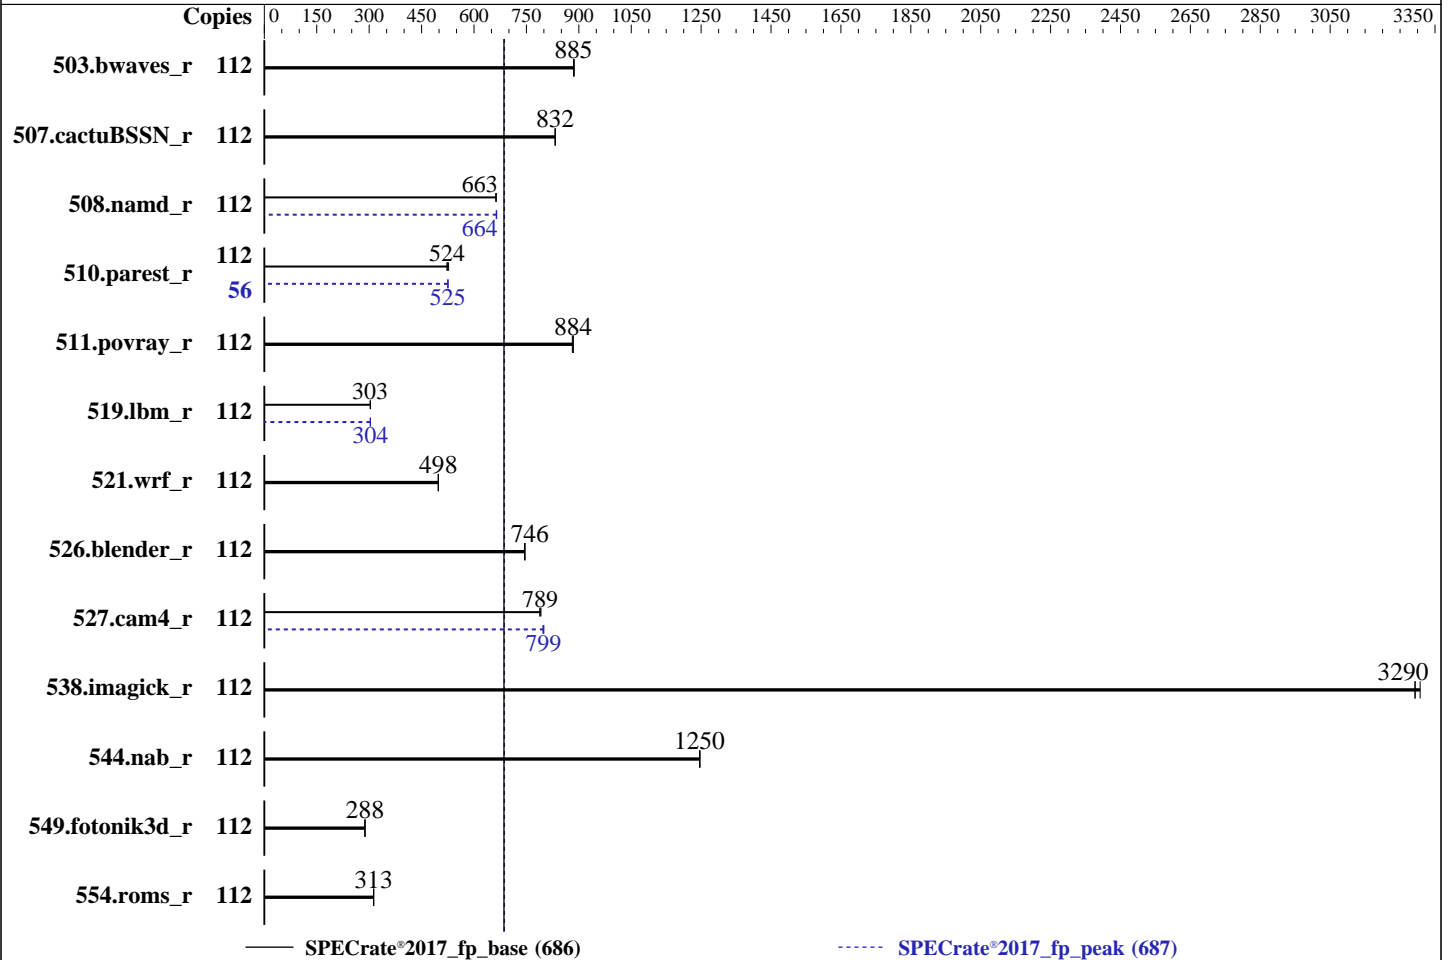

Hardware

CPU Name: AMD EPYC 9734
 Max MHz: 3000
 Nominal: 2200
 Enabled: 112 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip,
 16 MB shared / 7 cores
 Other: None
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 1.6 TB PCIe NVMe SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86_64)
 Kernel 5.14.21-150400.22-default
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: No
 Firmware: Version 1201 released Aug-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 687

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|--------|-------------|-------------|-------------|-------------|------------|------------|--------|-------------|-------------|-------------|-------------|------------|------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r | 112 | 1266 | 887 | <u>1269</u> | <u>885</u> | 1269 | 885 | 112 | 1266 | 887 | <u>1269</u> | <u>885</u> | 1269 | 885 |
| 507.cactuBSSN_r | 112 | 170 | 832 | 170 | 832 | <u>170</u> | <u>832</u> | 112 | 170 | 832 | 170 | 832 | <u>170</u> | <u>832</u> |
| 508.namd_r | 112 | <u>160</u> | <u>663</u> | 161 | 662 | 160 | 663 | 112 | <u>160</u> | <u>664</u> | 160 | 664 | 160 | 665 |
| 510.parest_r | 112 | 556 | 527 | 561 | 523 | <u>560</u> | <u>524</u> | 56 | 279 | 525 | <u>279</u> | <u>525</u> | 279 | 526 |
| 511.povray_r | 112 | 296 | 884 | 297 | 881 | <u>296</u> | <u>884</u> | 112 | 296 | 884 | 297 | 881 | <u>296</u> | <u>884</u> |
| 519.lbm_r | 112 | <u>389</u> | <u>303</u> | 389 | 303 | 389 | 304 | 112 | 389 | 303 | 389 | 304 | <u>389</u> | <u>304</u> |
| 521.wrf_r | 112 | <u>504</u> | <u>498</u> | 504 | 498 | 504 | 498 | 112 | <u>504</u> | <u>498</u> | 504 | 498 | 504 | 498 |
| 526.blender_r | 112 | 229 | 745 | <u>229</u> | <u>746</u> | 229 | 746 | 112 | 229 | 745 | <u>229</u> | <u>746</u> | 229 | 746 |
| 527.cam4_r | 112 | <u>248</u> | <u>789</u> | 248 | 788 | 247 | 792 | 112 | <u>245</u> | <u>799</u> | 246 | 797 | 245 | 800 |
| 538.imagick_r | 112 | 84.6 | 3290 | <u>84.6</u> | <u>3290</u> | 84.2 | 3310 | 112 | 84.6 | 3290 | <u>84.6</u> | <u>3290</u> | 84.2 | 3310 |
| 544.nab_r | 112 | <u>151</u> | <u>1250</u> | 151 | 1250 | 151 | 1250 | 112 | <u>151</u> | <u>1250</u> | 151 | 1250 | 151 | 1250 |
| 549.fotonik3d_r | 112 | <u>1515</u> | <u>288</u> | 1514 | 288 | 1517 | 288 | 112 | <u>1515</u> | <u>288</u> | 1514 | 288 | 1517 | 288 |
| 554.roms_r | 112 | 569 | 313 | 569 | 313 | <u>569</u> | <u>313</u> | 112 | 569 | 313 | 569 | 313 | <u>569</u> | <u>313</u> |

SPECrate®2017_fp_base = **686**

SPECrate®2017_fp_peak = **687**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
OS set to performance mode via cpupower frequency-set -g performance
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
```

```
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 687

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/aocczn4/amd_rate_aocc400_znver4_A_lib/lib:/aocczn4/amd_rate_aocc400_znver4_A_lib/lib32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration:

SR-IOV Support = Disabled

SVM Mode = Disabled

NUMA nodes per socket = NPS4

Determinism Control = Manual

Determinism Enable = Power

Engine Boost = Aggressive

TDP Control = Manual

TDP = 400

PPT Control = Manual

PPT = 400

L2 Stream HW Prefetcher = Disabled

SMT Control = Disable

BMC Configuration:

Fan mode = Full speed mode

Sysinfo program /aocczn4/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Wed Nov 8 20:53:49 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 687

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Platform Notes (Continued)

- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
20:53:49 up 1 day, 5:14, 2 users, load average: 4.08, 43.07, 78.73
USER      TTY      FROM          LOGIN@      IDLE        JCPU        PCPU        WHAT
root      tty1     -             Tue15      29:11m     0.07s      0.07s      -bash
root      tty2     -             Tue17      9:42m     1.53s      0.14s      /bin/bash ./amd_rate_aocc400_znver4_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 3094732
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes      (-u) 3094732
virtual memory          (kbytes, -v) unlimited
file locks               (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./rate.sh
python3 ./run_amd_rate_aocc400_znver4_A1.py
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 687

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Platform Notes (Continued)

```

/bin/bash ./amd_rate_aocc400_znver4_A1.sh
runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.174/templogs/preenv.fprate.174.0.log --lognum 174.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /aocczn4

```

```

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9734 112-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 160
stepping       : 2
microcode      : 0xaa00212
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 3584 4K pages
cpu cores     : 112
siblings      : 112
1 physical ids (chips)
112 processors (hardware threads)
physical id 0: core ids
0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182,192-198,208-214,224-230,
240-246
physical id 0: apicids
0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182,192-198,208-214,224-230,
240-246
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.37.2:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 112
On-line CPU(s) list: 0-111
Vendor ID: AuthenticAMD
Model name: AMD EPYC 9734 112-Core Processor
CPU family: 25
Model: 160
Thread(s) per core: 1
Core(s) per socket: 112
Socket(s): 1
Stepping: 2
Frequency boost: enabled
CPU max MHz: 2999.2180
CPU min MHz: 1500.0000
BogoMIPS: 4399.93
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 687

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Platform Notes (Continued)

```

invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmcall fsgsbase bmi1
avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
svm_lock nrp_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d

```

Virtualization:

```

AMD-V
L1d cache: 3.5 MiB (112 instances)
L1i cache: 3.5 MiB (112 instances)
L2 cache: 112 MiB (112 instances)
L3 cache: 256 MiB (16 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-27
NUMA node1 CPU(s): 28-55
NUMA node2 CPU(s): 56-83
NUMA node3 CPU(s): 84-111
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE | LEVEL | SETS | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d | 32K | 3.5M | 8 | Data | 1 | 64 | 1 | 64 |
| L1i | 32K | 3.5M | 8 | Instruction | 1 | 64 | 1 | 64 |
| L2 | 1M | 112M | 8 | Unified | 2 | 2048 | 1 | 64 |
| L3 | 16M | 256M | 16 | Unified | 3 | 16384 | 1 | 64 |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-27
node 0 size: 193193 MB
node 0 free: 191879 MB
node 1 cpus: 28-55
node 1 size: 193528 MB
node 1 free: 192693 MB
node 2 cpus: 56-83
node 2 size: 193528 MB
node 2 free: 192733 MB
node 3 cpus: 84-111
node 3 size: 193456 MB
node 3 free: 192638 MB
node distances:
node  0  1  2  3
0:  10  12  12  12
1:  12  10  12  12
2:  12  12  10  12
3:  12  12  12  10

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 687

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Platform Notes (Continued)

9. /proc/meminfo

MemTotal: 792276788 kB

10. who -r

run-level 3 Nov 7 15:40

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

| Default Target | Status |
|----------------|---------|
| multi-user | running |

12. Services, from systemctl list-unit-files

| STATE | UNIT FILES |
|-----------------|---|
| enabled | YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd wickedd wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny |
| enabled-runtime | systemd-remount-fs |
| disabled | autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nvmmf-autoconnect rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd svnservice systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned udisks2 |
| indirect | wickedd |

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=9bcf0374-b29f-4a4c-932e-9c0e90fb0803
splash=silent
mitigations=auto
quiet

14. cpupower frequency-info

analyzing CPU 0:
current policy: frequency should be within 1.50 GHz and 2.20 GHz.
The governor "performance" may decide which speed to use within this range.
boost state support:
Supported: yes
Active: yes

15. tuned-adm active

It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance

16. sysctl

| | |
|-----------------------------|----|
| kernel.numa_balancing | 1 |
| kernel.randomize_va_space | 0 |
| vm.compaction_proactiveness | 20 |
| vm.dirty_background_bytes | 0 |
| vm.dirty_background_ratio | 10 |

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 687

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Platform Notes (Continued)

```

vm.dirty_bytes          0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio          8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold    500
vm.min_unmapped_ratio   1
vm.nr_hugepages         0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness           1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode    1

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
20. Disk information
SPEC is set to: /aocczn4
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p8 xfs 500G 290G 211G 58% /

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:      ASUSTeK COMPUTER INC.
Product:     RS520A-E12-RS12U
Product Family: Server
Serial:      123456789012

```

```

-----
22. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
12x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 687

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Platform Notes (Continued)

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends Inc.
BIOS Version: 1201
BIOS Date: 08/25/2023
BIOS Revision: 12.1

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 687

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Compiler Version Notes (Continued)

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 687

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Base Portability Flags (Continued)

```

511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -lamdlibm -lamdalloc -lflang

```

C++ benchmarks:

```

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang

```

Fortran benchmarks:

```

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang

```

Benchmarks using both Fortran and C:

```

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 687

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Benchmarks using both C and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 687

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 687

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

519.lbm_r (continued):

-lamdalloc

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc

510.parest_r: -m64 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-lflang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 687

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K14-V1.6.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags-asusv01.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K14-V1.6.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags-asusv01.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS520A-E12-RS12U
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 687

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Nov-2023

Hardware Availability: Jun-2023

Software Availability: Nov-2022

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-11-08 07:53:48-0500.

Report generated on 2024-01-03 17:31:16 by CPU2017 PDF formatter v6716.

Originally published on 2024-01-02.