



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Platinum 8568Y+, 2.30GHz)

SPECrate®2017\_int\_base = 901

SPECrate®2017\_int\_peak = 929

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

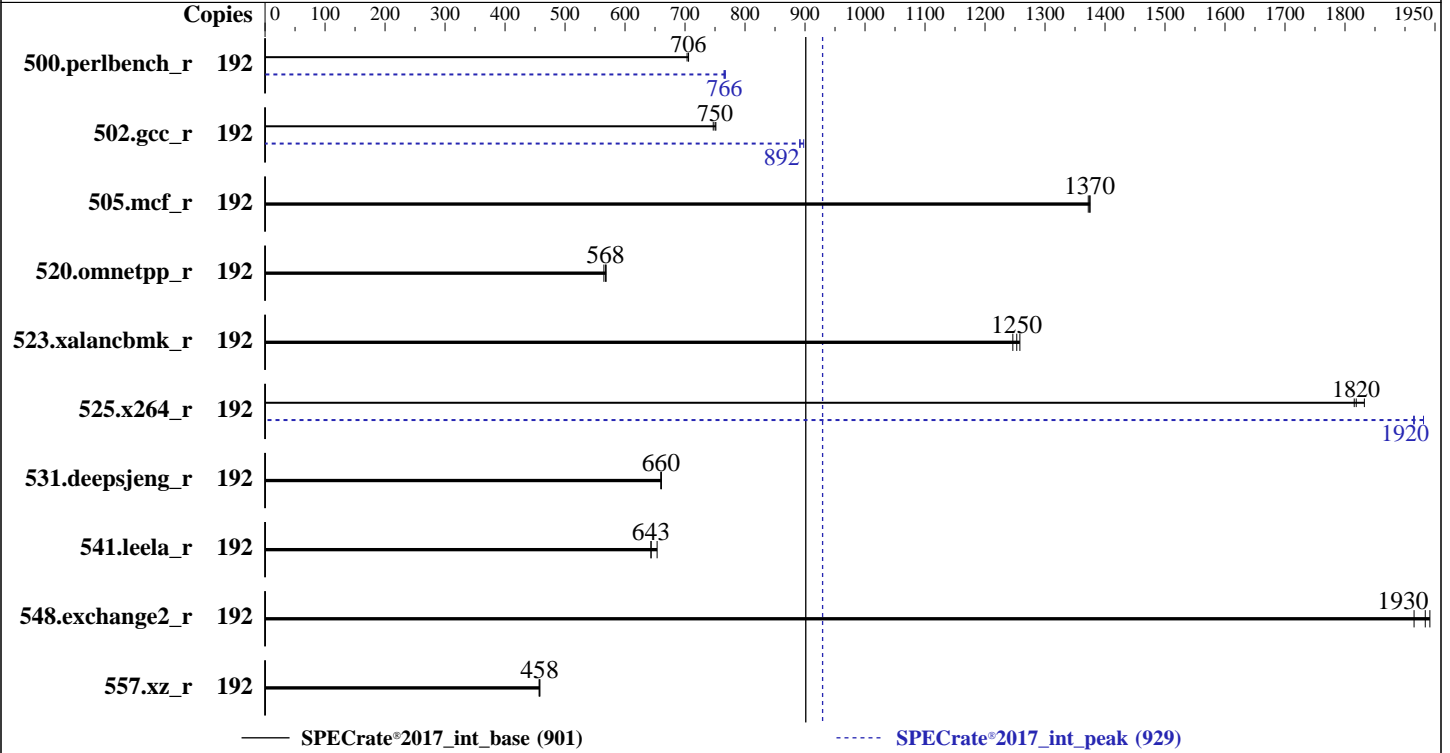

### Hardware

CPU Name: Intel Xeon Platinum 8568Y+  
 Max MHz: 4000  
 Nominal: 2300  
 Enabled: 96 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 300 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R)  
 Storage: 1 TB SATA SSDs 6Gb/s  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran  
 Compiler for Linux;  
 Parallel: No  
 Firmware: Version 4.3.3a released Jan-2024  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance  
 at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Platinum 8568Y+, 2.30GHz)

SPECrate®2017\_int\_base = 901

SPECrate®2017\_int\_peak = 929

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	433	706	<b>433</b>	<b>706</b>	435	703	192	399	765	398	767	<b>399</b>	<b>766</b>
502.gcc_r	192	362	751	364	747	<b>362</b>	<b>750</b>	192	305	891	303	898	<b>305</b>	<b>892</b>
505.mcf_r	192	<b>226</b>	<b>1370</b>	226	1380	226	1370	192	<b>226</b>	<b>1370</b>	226	1380	226	1370
520.omnetpp_r	192	<b>444</b>	<b>568</b>	443	568	446	565	192	<b>444</b>	<b>568</b>	443	568	446	565
523.xalancbmk_r	192	<b>162</b>	<b>1250</b>	163	1250	161	1260	192	<b>162</b>	<b>1250</b>	163	1250	161	1260
525.x264_r	192	<b>185</b>	<b>1820</b>	183	1830	185	1820	192	<b>176</b>	<b>1920</b>	174	1930	176	1910
531.deepsjeng_r	192	333	660	333	661	<b>333</b>	<b>660</b>	192	333	660	333	661	<b>333</b>	<b>660</b>
541.leela_r	192	494	643	487	653	<b>494</b>	<b>643</b>	192	494	643	487	653	<b>494</b>	<b>643</b>
548.exchange2_r	192	<b>260</b>	<b>1930</b>	259	1940	263	1920	192	<b>260</b>	<b>1930</b>	259	1940	263	1920
557.xz_r	192	454	457	453	458	<b>453</b>	<b>458</b>	192	454	457	453	458	<b>453</b>	<b>458</b>

SPECrate®2017\_int\_base = 901

SPECrate®2017\_int\_peak = 929

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Platinum 8568Y+, 2.30GHz)

SPECrate®2017\_int\_base = 901

SPECrate®2017\_int\_peak = 929

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

### BIOS Settings:

Sub NUMA Clustering set to Enable SNC2(2-clusters)  
Adjacent cache line prefetcher set to Enabled  
DCU streamer prefetch set to Disabled  
Enhanced CPU performance set to Auto  
LLC Dead Line set to Disabled  
Processor C6 Report set to Enabled  
ADDDC Sparing set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on speccpu-EMR Fri Feb 23 23:12:55 2024

SUT (System Under Test) info as seen by some common utilities.

### ----- Table of contents -----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----  
1. uname -a  
Linux speccpu-EMR 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

2. w  
23:12:55 up 2 min, 1 user, load average: 11.28, 7.92, 3.16  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Platinum 8568Y+, 2.30GHz)

SPECrate®2017\_int\_base = 901

SPECrate®2017\_int\_peak = 929

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```
root      tty1      -                23:12    7.00s  1.16s  0.11s -bash
```

-----  
3. Username

From environment variable \$USER: root

-----  
4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4126696
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4126696
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

-----  
5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
sh runrate.ic2023.sh
runcpu --action=build --action validate --define default-platform-flags --define numcopies=192 -c
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --reportable --iterations 3 --define smt-on --define
cores=96 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune all -o all
intrate
runcpu --action build --action validate --define default-platform-flags --define numcopies=192 --configfile
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --reportable --iterations 3 --define smt-on --define
cores=96 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune all
--output_format all --nopower --runmode rate --tune base:peak --size refrate intrate --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2017.014/templogs/preenv.intrate.014.0.log --lognum 014.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

-----  
6. /proc/cpuinfo

```
model name      : INTEL(R) XEON(R) PLATINUM 8568Y+
vendor_id      : GenuineIntel
cpu family     : 6
model         : 207
stepping      : 2
microcode     : 0x21000200
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores     : 48
siblings      : 96
2 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-47
physical id 1: core ids 0-47
physical id 0: apicids 0-95
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Platinum 8568Y+, 2.30GHz)

SPECrate®2017\_int\_base = 901

SPECrate®2017\_int\_peak = 929

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

physical id 1: apicids 128-223

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:           Little Endian
CPU(s):                192
On-line CPU(s) list:  0-191
Vendor ID:            GenuineIntel
Model name:           INTEL(R) XEON(R) PLATINUM 8568Y+
CPU family:           6
Model:                207
Thread(s) per core:   2
Core(s) per socket:   48
Socket(s):            2
Stepping:             2
CPU max MHz:          4000.0000
CPU min MHz:          800.0000
BogoMIPS:             4600.00
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                    ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                    sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                    lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                    invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                    vmni flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                    bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                    avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                    xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                    cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
                    hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg
                    avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                    avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                    enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                    amx_tile flush_l1d arch_capabilities

Virtualization:       VT-x
L1d cache:           4.5 MiB (96 instances)
L1i cache:           3 MiB (96 instances)
L2 cache:            192 MiB (96 instances)
L3 cache:            600 MiB (2 instances)
NUMA node(s):        4
NUMA node0 CPU(s):   0-23,96-119
NUMA node1 CPU(s):   24-47,120-143
NUMA node2 CPU(s):   48-71,144-167
NUMA node3 CPU(s):   72-95,168-191
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:  Not affected
Vulnerability Mds:   Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Platinum 8568Y+, 2.30GHz)

SPECrate®2017\_int\_base = 901

SPECrate®2017\_int\_peak = 929

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

### Platform Notes (Continued)

Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	2M	192M	16	Unified	2	2048	1	64
L3	300M	600M	20	Unified	3	245760	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-23,96-119
node 0 size: 257671 MB
node 0 free: 256283 MB
node 1 cpus: 24-47,120-143
node 1 size: 258035 MB
node 1 free: 257270 MB
node 2 cpus: 48-71,144-167
node 2 size: 258001 MB
node 2 free: 257372 MB
node 3 cpus: 72-95,168-191
node 3 size: 257988 MB
node 3 free: 257336 MB
node distances:
node  0  1  2  3
0:  10 12 21 21
1:  12 10 21 21
2:  21 21 10 12
3:  21 21 12 10
```

9. /proc/meminfo

MemTotal: 1056458504 kB

10. who -r

run-level 3 Feb 23 23:11

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged irqbalance issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld gpm grub2-once haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd udisks2

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Platinum 8568Y+, 2.30GHz)

SPECrate®2017\_int\_base = 901

SPECrate®2017\_int\_peak = 929

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Platform Notes (Continued)

indirect            wickedd

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=155d53d1-2428-4816-a80b-8d0438d0586b
splash=silent
mitigations=auto
quiet
security=apparmor
```

-----  
14. cpupower frequency-info

```
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 4.00 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes
```

-----  
15. sysctl

```
kernel.numa_balancing            1
kernel.randomize_va_space       2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                   0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                   20
vm.dirty_writeback_centisecs     500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold             500
vm.min_unmapped_ratio           1
vm.nr_hugepages                  0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages      0
vm.swappiness                    1
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0
```

-----  
16. /sys/kernel/mm/transparent\_hugepage

```
defrag                    always defer defer+madvise [madvise] never
enabled                   [always] madvise never
hpage_pmd_size           2097152
shmem_enabled            always within_size advise [never] deny force
```

-----  
17. /sys/kernel/mm/transparent\_hugepage/khugepaged

```
alloc_sleep_millisecs    60000
defrag                   1
max_ptes_none            511
max_ptes_shared          256
max_ptes_swap            64
pages_to_scan            4096
scan_sleep_millisecs    10000
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Platinum 8568Y+, 2.30GHz)

SPECrate®2017\_int\_base = 901

SPECrate®2017\_int\_peak = 929

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Platform Notes (Continued)

-----  
18. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
```

-----  
19. Disk information

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb2       btrfs 892G  21G  871G   3% /home
```

-----  
20. /sys/devices/virtual/dmi/id

```
Vendor:      Cisco Systems Inc
Product:     UCSX-210C-M7
Serial:      FCH270978F5
```

-----  
21. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
16x 0xCE00 M321R8GA0PB0-CWMCH 64 GB 2 rank 5600
```

-----  
22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      Cisco Systems, Inc.
BIOS Version:     X210M7.4.3.3a.0.0118241337
BIOS Date:        01/18/2024
BIOS Revision:    5.32
```

## Compiler Version Notes

=====  
C | 502.gcc\_r(peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
C | 502.gcc\_r(peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Platinum 8568Y+, 2.30GHz)

SPECrate®2017\_int\_base = 901

SPECrate®2017\_int\_peak = 929

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Compiler Version Notes (Continued)

```

-----
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
-----

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
-----

```

```

-----
C++   | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
      | 541.leela_r(base, peak)
-----

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
-----

```

```

-----
Fortran | 548.exchange2_r(base, peak)
-----

```

```

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
-----

```

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Platinum 8568Y+, 2.30GHz)

SPECrate®2017\_int\_base = 901

SPECrate®2017\_int\_peak = 929

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmallocc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmallocc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmallocc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Platinum 8568Y+, 2.30GHz)

SPECrate®2017\_int\_base = 901

SPECrate®2017\_int\_peak = 929

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Peak Portability Flags (Continued)

557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

```
502.gcc_r: -m32
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Platinum 8568Y+, 2.30GHz)

SPECrate®2017\_int\_base = 901

SPECrate®2017\_int\_peak = 929

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Peak Optimization Flags (Continued)

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-EMR-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-EMR-revB.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-02-24 02:12:55-0500.

Report generated on 2024-03-14 11:03:31 by CPU2017 PDF formatter v6716.

Originally published on 2024-03-13.