



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Gold 6534,
3.90GHz)

SPECrate®2017_fp_base = 297

SPECrate®2017_fp_peak = 294

CPU2017 License: 9019


Test Date: Feb-2024

Test Sponsor: Cisco Systems

Hardware Availability: Feb-2024

Tested by: Cisco Systems

Software Availability: Dec-2023

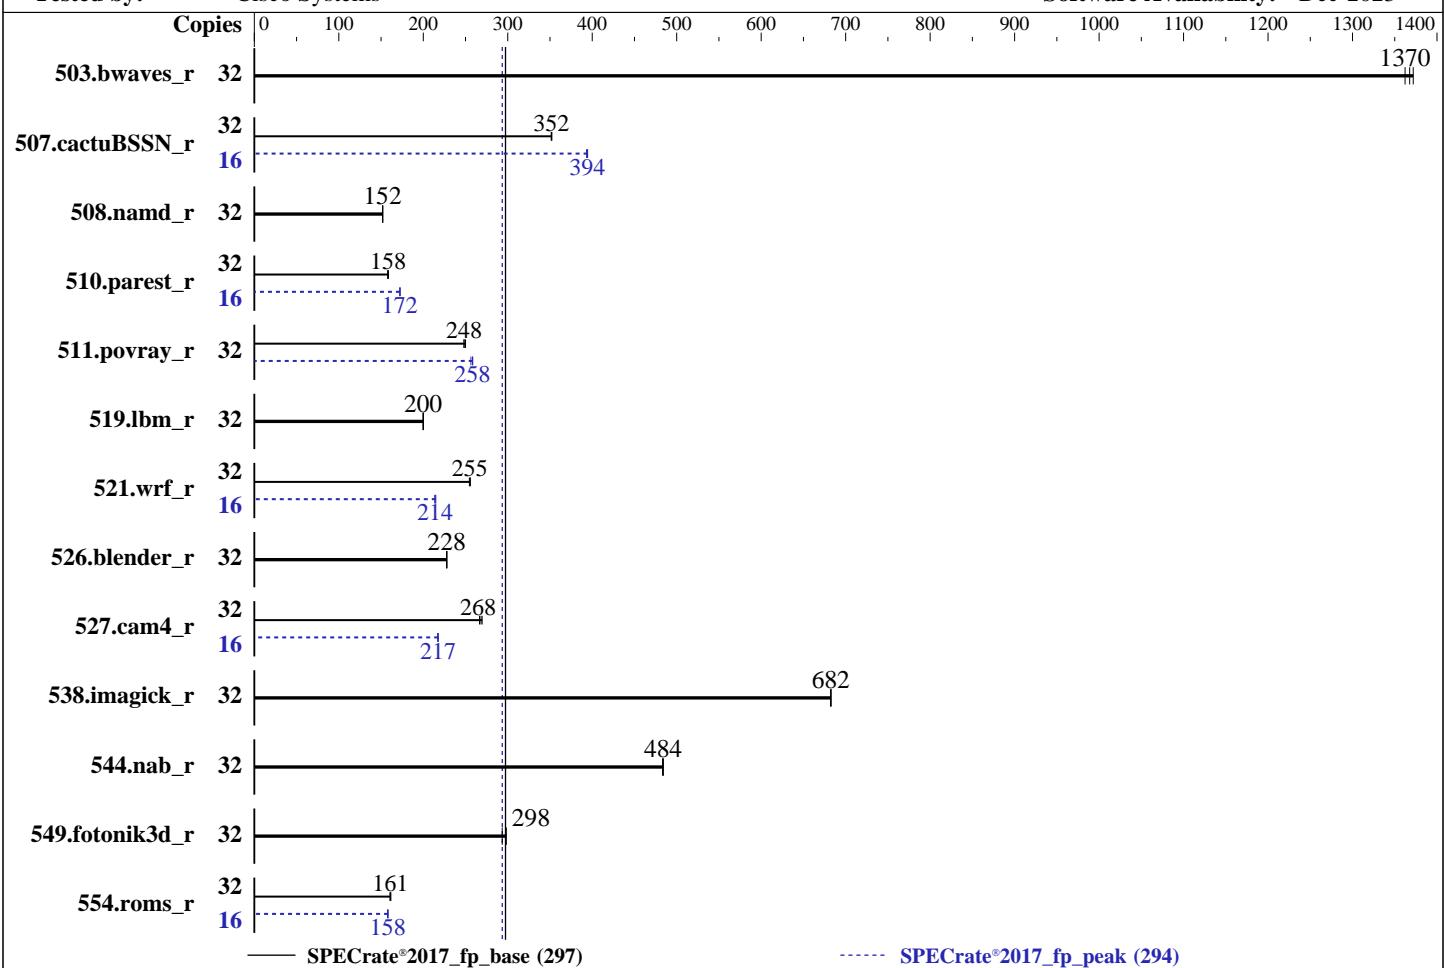

— SPECrate®2017_fp_base (297)

----- SPECrate®2017_fp_peak (294)

Hardware

CPU Name: Intel Xeon Gold 6534
 Max MHz: 4200
 Nominal: 3900
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 22.5 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)
 Storage: 1 TB SATA SSDs 6Gb/s
 Other: None

OS:

SUSE Linux Enterprise Server 15 SP4

5.14.21-150400.22-default

C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;

Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;

Parallel:

No

Firmware:

Version 4.3.3a released Jan-2024

File System:

xfs

System State:

Run level 3 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

64-bit

Other:

jemalloc memory allocator V5.0.1

Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.

Software



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Gold 6534,
3.90GHz)

SPECrate®2017_fp_base = 297

SPECrate®2017_fp_peak = 294

CPU2017 License: 9019

Test Date: Feb-2024

Test Sponsor: Cisco Systems

Hardware Availability: Feb-2024

Tested by: Cisco Systems

Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	234	1370	235	1370	236	1360	32	234	1370	235	1370	236	1360
507.cactuBSSN_r	32	115	352	115	352	115	351	16	51.3	395	51.4	394	51.5	393
508.namd_r	32	200	152	200	152	200	152	32	200	152	200	152	200	152
510.parest_r	32	529	158	528	159	530	158	16	243	172	243	172	243	172
511.povray_r	32	301	248	299	250	301	248	32	289	258	291	256	289	259
519.lbm_r	32	168	200	169	200	169	200	32	168	200	169	200	169	200
521.wrf_r	32	280	256	281	255	282	255	16	168	214	168	214	167	215
526.blender_r	32	214	228	214	228	214	228	32	214	228	214	228	214	228
527.cam4_r	32	210	267	208	270	209	268	16	129	218	129	217	129	217
538.imagick_r	32	117	682	117	682	117	683	32	117	682	117	682	117	683
544.nab_r	32	111	483	111	484	111	484	32	111	483	111	484	111	484
549.fotonik3d_r	32	425	293	419	298	418	298	32	425	293	419	298	418	298
554.roms_r	32	315	162	316	161	317	161	16	161	158	161	158	161	158

SPECrate®2017_fp_base = 297

SPECrate®2017_fp_peak = 294

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Gold 6534,
3.90GHz)

SPECrate®2017_fp_base = 297

SPECrate®2017_fp_peak = 294

CPU2017 License: 9019

Test Date: Feb-2024

Test Sponsor: Cisco Systems

Hardware Availability: Feb-2024

Tested by: Cisco Systems

Software Availability: Dec-2023

General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

Sub NUMA Clustering set to Enable SNC2(2-clusters)
Adjacent cache line prefetcher set to Enabled
DCU streamer prefetch set to Disabled
Enhanced CPU performance set to Auto
LLC Dead Line set to Disabled
Processor C6 Report set to Enabled
ADDDC Sparing set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on srv05 Mon Feb 26 08:17:43 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
-

1. uname -a
Linux srv05 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222) x86_64
x86_64 x86_64 GNU/Linux

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Gold 6534,
3.90GHz)

SPECCrate®2017_fp_base = 297

SPECCrate®2017_fp_peak = 294

CPU2017 License: 9019

Test Date: Feb-2024

Test Sponsor: Cisco Systems

Hardware Availability: Feb-2024

Tested by: Cisco Systems

Software Availability: Dec-2023

Platform Notes (Continued)

2. w
08:17:43 up 4:29, 1 user, load average: 19.81, 29.02, 30.84
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root ttym1 - 03:49 4:27m 1.03s 0.16s -bash

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4126961
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4126961
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
sh runrate.ic2023.sh
runcpu --action=build --action validate --define default-platform-flags --define numcopies=32 -c
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --reportable --iterations 3 --define smt-on --define
cores=16 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune all -o all
fprate
runcpu --action build --action validate --define default-platform-flags --define numcopies=32 --configfile
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --reportable --iterations 3 --define smt-on --define
cores=16 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune all
--output_format all --nopower --runmode rate --tune base:peak --size reframe fprate --nopreenv
--note-preenv --logfile \$SPEC/tmp/CPU2017.024/templogs/preenv.fprate.024.0.log --lognum 024.0
--from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/cpu2017

6. /proc/cpuinfo
model name : INTEL(R) XEON(R) GOLD 6534
vendor_id : GenuineIntel
cpu family : 6
model : 207
stepping : 2
microcode : 0x21000200
bugs : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores : 8
siblings : 16
2 physical ids (chips)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Gold 6534,
3.90GHz)

SPECrate®2017_fp_base = 297

SPECrate®2017_fp_peak = 294

CPU2017 License: 9019

Test Date: Feb-2024

Test Sponsor: Cisco Systems

Hardware Availability: Feb-2024

Tested by: Cisco Systems

Software Availability: Dec-2023

Platform Notes (Continued)

```
32 processors (hardware threads)
physical id 0: core ids 0-7
physical id 1: core ids 0-7
physical id 0: apicids 0-15
physical id 1: apicids 128-143
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

```
From lscpu from util-linux 2.37.2:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 32
On-line CPU(s) list: 0-31
Vendor ID: GenuineIntel
Model name: INTEL(R) XEON(R) GOLD 6534
CPU family: 6
Model: 207
Thread(s) per core: 2
Core(s) per socket: 8
Socket(s): 2
Stepping: 2
CPU max MHz: 4200.0000
CPU min MHz: 800.0000
BogoMIPS: 7800.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
       clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
       lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
       nonstop_tsc cpuid aperf fmperf tsc_known_freq pni pclmulqdq dtes64 monitor
       ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
       sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
      lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
       invpcid_single cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
       vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
       bmi2 erts invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
       avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
       xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
       cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
       hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg
       avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
       avx512_vpocntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
       enqcmd fsrm md_clear serialize tsxlptrk pconfig arch_lbr avx512_fp16
       amx_tile flush_ll1d arch_capabilities
Virtualization: VT-x
L1d cache: 768 KiB (16 instances)
L1i cache: 512 KiB (16 instances)
L2 cache: 32 MiB (16 instances)
L3 cache: 45 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-3,16-19
NUMA node1 CPU(s): 4-7,20-23
NUMA node2 CPU(s): 8-11,24-27
NUMA node3 CPU(s): 12-15,28-31
Vulnerability Itlb multihit: Not affected
Vulnerability Llft: Not affected
Vulnerability Mds: Not affected
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Gold 6534,
3.90GHz)

SPECrate®2017_fp_base = 297

SPECrate®2017_fp_peak = 294

CPU2017 License: 9019

Test Date: Feb-2024

Test Sponsor: Cisco Systems

Hardware Availability: Feb-2024

Tested by: Cisco Systems

Software Availability: Dec-2023

Platform Notes (Continued)

Vulnerability Meltdown: Not affected

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp

Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization

Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	2M	32M	16	Unified	2	2048	1	64
L3	22.5M	45M	15	Unified	3	24576	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-3,16-19

node 0 size: 257681 MB

node 0 free: 249049 MB

node 1 cpus: 4-7,20-23

node 1 size: 258045 MB

node 1 free: 254217 MB

node 2 cpus: 8-11,24-27

node 2 size: 258011 MB

node 2 free: 254194 MB

node 3 cpus: 12-15,28-31

node 3 size: 258025 MB

node 3 free: 254220 MB

node distances:

node 0 1 2 3

0: 10 12 21 21

1: 12 10 21 21

2: 21 21 10 12

3: 21 21 12 10

9. /proc/meminfo

MemTotal: 1056526540 kB

10. who -r

run-level 3 Feb 26 03:48

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage auditd cron getty@ haveged irqbalance issue-generator kbdsettings klog lvm2-monitor nsqd nvmefc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny

enabled-runtime

enabled-runtime	systemd-remount-fs
-----------------	--------------------

disabled

disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm grub2-once haveged-switch-root ipmi ipmievfd issue-add-ssh-keys kexec-load
----------	--

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Gold 6534,
3.90GHz)

SPECrate®2017_fp_base = 297

SPECrate®2017_fp_peak = 294

CPU2017 License: 9019

Test Date: Feb-2024

Test Sponsor: Cisco Systems

Hardware Availability: Feb-2024

Tested by: Cisco Systems

Software Availability: Dec-2023

Platform Notes (Continued)

```
lunmask man-db-create multipathd nfs nfs-blkmap nvvmf-autoconnect rdisc rpcbind
rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd svnservice
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd udisks2
indirect wickedd

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=f1a623f5-7b90-429d-9d79-3670a3964cf8
splash=silent
mitigations=auto
quiet
security=

-----
14. cpupower frequency-info
analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 4.20 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
    boost state support:
      Supported: yes
      Active: yes

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode           0

-----
16. /sys/kernel/mm/transparent_hugepage
defrag           always defer defer+madvise [madvise] never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag             1
max_ptes_none      511
max_ptes_shared    256
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Gold 6534,
3.90GHz)

SPECrate®2017_fp_base = 297

SPECrate®2017_fp_peak = 294

CPU2017 License: 9019

Test Date: Feb-2024

Test Sponsor: Cisco Systems

Hardware Availability: Feb-2024

Tested by: Cisco Systems

Software Availability: Dec-2023

Platform Notes (Continued)

```
max_ptes_swap      64
pages_to_scan     4096
scan_sleep_millisecs 10000
```

```
-----  
18. OS release  
From /etc/*-release /etc/*-version  
os-release SUSE Linux Enterprise Server 15 SP4
```

```
-----  
19. Disk information  
SPEC is set to: /home/cpu2017  
Filesystem  Type  Size  Used Avail Use% Mounted on  
/dev/sdb2    xfs   893G  38G  856G  5%  /
```

```
-----  
20. /sys/devices/virtual/dmi/id  
Vendor:      Cisco Systems Inc  
Product:     UCSX-210C-M7  
Serial:      FCH270978F6
```

```
-----  
21. dmidecode  
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the  
"DMTF SMBIOS" standard.  
Memory:  
 16x 0xCE00 M321R8GA0PB0-CWMCH 64 GB 2 rank 5600, configured at 4800
```

```
-----  
22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor:      Cisco Systems, Inc.  
BIOS Version:     X210M7.4.3.3a.0.0118241337  
BIOS Date:        01/18/2024  
BIOS Revision:    5.32
```

Compiler Version Notes

```
=====| 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)|=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
```

```
=====| 508.namd_r(base, peak) 510.parest_r(base, peak)|=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
```

```
=====| 511.povray_r(base, peak) 526.blender_r(base, peak)|=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Gold 6534,
3.90GHz)

SPECrate®2017_fp_base = 297

SPECrate®2017_fp_peak = 294

CPU2017 License: 9019

Test Date: Feb-2024

Test Sponsor: Cisco Systems

Hardware Availability: Feb-2024

Tested by: Cisco Systems

Software Availability: Dec-2023

Compiler Version Notes (Continued)

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactusBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Gold 6534,
3.90GHz)

SPECrate®2017_fp_base = 297

SPECrate®2017_fp_peak = 294

CPU2017 License: 9019

Test Date: Feb-2024

Test Sponsor: Cisco Systems

Hardware Availability: Feb-2024

Tested by: Cisco Systems

Software Availability: Dec-2023

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Gold 6534,
3.90GHz)

SPECrate®2017_fp_base = 297

SPECrate®2017_fp_peak = 294

CPU2017 License: 9019

Test Date: Feb-2024

Test Sponsor: Cisco Systems

Hardware Availability: Feb-2024

Tested by: Cisco Systems

Software Availability: Dec-2023

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -futto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Gold 6534,
3.90GHz)

SPECrate®2017_fp_base = 297

SPECrate®2017_fp_peak = 294

CPU2017 License: 9019

Test Date: Feb-2024

Test Sponsor: Cisco Systems

Hardware Availability: Feb-2024

Tested by: Cisco Systems

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -fltoto -mfpmath=sse -funroll-loops

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210 M7 (Intel Xeon Gold 6534,
3.90GHz)

SPECrate®2017_fp_base = 297

SPECrate®2017_fp_peak = 294

CPU2017 License: 9019

Test Date: Feb-2024

Test Sponsor: Cisco Systems

Hardware Availability: Feb-2024

Tested by: Cisco Systems

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>
<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-EMR-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>
<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-EMR-revB.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-02-26 11:17:43-0500.

Report generated on 2024-03-14 11:05:16 by CPU2017 PDF formatter v6716.

Originally published on 2024-03-13.