



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.90 GHz, Intel Xeon Gold 6542Y)

**SPECSpeed®2017\_fp\_base = 336**

**SPECSpeed®2017\_fp\_peak = 336**

CPU2017 License: 9016


**Test Date:** Apr-2024

Test Sponsor: ASUSTeK Computer Inc.

**Hardware Availability:** Dec-2023

Tested by: ASUSTeK Computer Inc.

**Software Availability:** Dec-2023

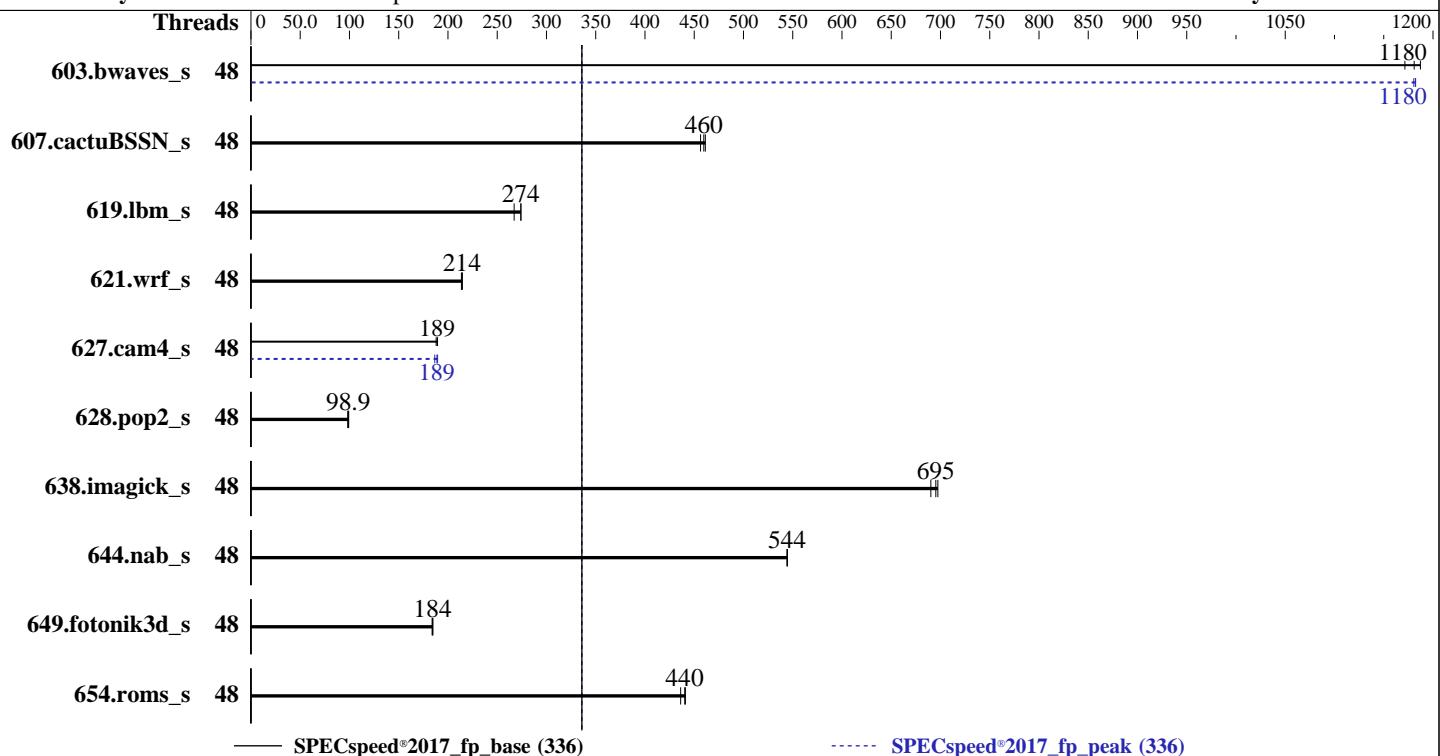

Hardware		Software	
CPU Name:	Intel Xeon Gold 6542Y	OS:	SUSE Linux Enterprise High Performance Computing 15 SP5 (x86_64)
Max MHz:	4100		Kernel 5.14.21-150500.53-default
Nominal:	2900	Compiler:	C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;
Enabled:	48 cores, 2 chips	Parallel:	Yes
Orderable:	1, 2 chip(s)	Firmware:	Version 2201 released Dec-2023
Cache L1:	32 KB I + 48 KB D on chip per core	File System:	xfs
L2:	2 MB I+D on chip per core	System State:	Run level 3 (multi-user)
L3:	60 MB I+D on chip per chip	Base Pointers:	64-bit
Other:	None	Peak Pointers:	64-bit
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 5200)	Other:	jemalloc memory allocator V5.0.1
Storage:	1 x 1.6 TB PCIe NVMe SSD	Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.
Other:	CPU Cooling: Air		



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.90 GHz, Intel Xeon Gold 6542Y)

**SPECSpeed®2017\_fp\_base = 336**

**SPECSpeed®2017\_fp\_peak = 336**

CPU2017 License: 9016

Test Date: Apr-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	48	50.4	1170	49.7	1190	<b>50.0</b>	<b>1180</b>	48	<b>49.9</b>	<b>1180</b>	49.9	1180	50.0	1180
607.cactuBSSN_s	48	<b>36.3</b>	<b>460</b>	36.1	461	36.5	456	48	<b>36.3</b>	<b>460</b>	36.1	461	36.5	456
619.lbm_s	48	<b>19.1</b>	<b>274</b>	19.6	267	19.1	274	48	<b>19.1</b>	<b>274</b>	19.6	267	19.1	274
621.wrf_s	48	61.9	214	<b>61.7</b>	<b>214</b>	61.6	215	48	61.9	214	<b>61.7</b>	<b>214</b>	61.6	215
627.cam4_s	48	47.1	188	<b>46.9</b>	<b>189</b>	46.8	189	48	47.5	187	<b>47.0</b>	<b>189</b>	46.8	189
628.pop2_s	48	120	99.2	<b>120</b>	<b>98.9</b>	121	98.2	48	120	99.2	<b>120</b>	<b>98.9</b>	121	98.2
638.imagick_s	48	20.7	697	20.9	690	<b>20.7</b>	<b>695</b>	48	20.7	697	20.9	690	<b>20.7</b>	<b>695</b>
644.nab_s	48	<b>32.1</b>	<b>544</b>	32.1	545	32.1	544	48	<b>32.1</b>	<b>544</b>	32.1	545	32.1	544
649.fotonik3d_s	48	49.6	184	49.4	185	<b>49.4</b>	<b>184</b>	48	49.6	184	49.4	185	<b>49.4</b>	<b>184</b>
654.roms_s	48	<b>35.8</b>	<b>440</b>	35.7	441	36.1	436	48	<b>35.8</b>	<b>440</b>	35.7	441	36.1	436

**SPECSpeed®2017\_fp\_base = 336**

**SPECSpeed®2017\_fp\_peak = 336**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
OS set to performance mode via cpupower frequency-set -g performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/ic24u0/lib/intel64:/ic24u0/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

## Platform Notes

BIOS Configuration:  
VT-d = Disabled

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.90 GHz, Intel Xeon Gold 6542Y)

SPECspeed®2017\_fp\_base = 336

SPECspeed®2017\_fp\_peak = 336

CPU2017 License: 9016

Test Date: Apr-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

## Platform Notes (Continued)

Hyper-Threading = Disable

Patrol Scrub = Disabled

SNC = Disabled

Engine Boost = Aggressive

SR-IOV Support = Disabled

BMC Configuration:

Fan mode = Full speed mode

```
Sysinfo program /ic24u0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Wed Apr 10 14:26:12 2024
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----

1. uname -a  
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT\_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)  
x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
14:26:12 up 5:06, 2 users, load average: 35.23, 42.49, 43.76  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 09:21 5:04m 0.81s 0.00s /bin/bash ./speed.sh  
root tty2 - 10:26 31:14 0.02s 0.02s -bash

3. Username  
From environment variable \$USER: root

4. ulimit -a

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.90 GHz, Intel Xeon Gold 6542Y)

SPECSpeed®2017\_fp\_base = 336

SPECSpeed®2017\_fp\_peak = 336

CPU2017 License: 9016

Test Date: Apr-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

## Platform Notes (Continued)

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals          (-i) 4126964
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes       (-u) 4126964
virtual memory            (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./speed.sh
/bin/bash ./speed.sh
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2024.0.2-lin-sapphirerapids-speed-20231213.cfg --define cores=48 --tune base,peak -o all --define
  drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2024.0.2-lin-sapphirerapids-speed-20231213.cfg --define cores=48 --tune base,peak --output_format all
  --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
  --note-preenv --logfile $SPEC/tmp/CPU2017.140/templogs/preenv.fpspeed.140.0.log --lognum 140.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /ic24u0
```

```
-----
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) GOLD 6542Y
vendor_id        : GenuineIntel
cpu family       : 6
model            : 207
stepping          : 2
microcode        : 0x21000200
bugs             : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrp_brsb
cpu cores        : 24
siblings          : 24
2 physical ids (chips)
48 processors (hardware threads)
physical id 0: core ids 0-23
physical id 1: core ids 0-23
physical id 0: apicids 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46
physical id 1: apicids
  128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----
7. lscpu
```

From lscpu from util-linux 2.37.4:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.90 GHz, Intel Xeon Gold 6542Y)

**SPECspeed®2017\_fp\_base = 336**

**SPECspeed®2017\_fp\_peak = 336**

CPU2017 License: 9016

Test Date: Apr-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

## Platform Notes (Continued)

```

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 48
On-line CPU(s) list: 0-47
Vendor ID: GenuineIntel
Model name: INTEL(R) XEON(R) GOLD 6542Y
CPU family: 6
Model: 207
Thread(s) per core: 1
Core(s) per socket: 24
Socket(s): 2
Stepping: 2
CPU max MHz: 4100.0000
CPU min MHz: 800.0000
BogoMIPS: 5800.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology
      nonstop_tsc cpuid aperfmonperf tsc_known_freq pn1 pclmulqdq dtes64 monitor
      ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrp pdcm pcid dca sse4_1
      sse4_2 x2apic movebe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
     lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
      invpcid_single cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
      vnmi flexpriority ept vpvid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
      bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
      avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
      hwp_act_window hwp_epp hwp_pkg_req hfi avx512vbmi umip pku ospke waitpkg
      avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
      avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
      enqcmd fsrm md_clear serialize tsxlptrk pconfig arch_lbr avx512_fp16
      amx_tile flush_ll1d arch_capabilities

Virtualization: VT-x
L1d cache: 2.3 MiB (48 instances)
L1i cache: 1.5 MiB (48 instances)
L2 cache: 96 MiB (48 instances)
L3 cache: 120 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-23
NUMA node1 CPU(s): 24-47
Vulnerability Itlb multihit: Not affected
Vulnerability Llft: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:
  NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
  L1d     48K     2.3M   12 Data          1       64        1           64
  L1i     32K     1.5M    8 Instruction   1       64        1           64

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.90 GHz, Intel Xeon Gold 6542Y)

SPECspeed®2017\_fp\_base = 336

SPECspeed®2017\_fp\_peak = 336

CPU2017 License: 9016

Test Date: Apr-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

## Platform Notes (Continued)

L2	2M	96M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

---

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.  
available: 2 nodes (0-1)  
node 0 cpus: 0-23  
node 0 size: 515693 MB  
node 0 free: 513527 MB  
node 1 cpus: 24-47  
node 1 size: 516077 MB  
node 1 free: 515145 MB  
node distances:  
node 0 1  
0: 10 21  
1: 21 10

---

9. /proc/meminfo

MemTotal: 1056533828 kB

---

10. who -r

run-level 3 Apr 10 09:20

---

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

Default Target Status  
multi-user running

---

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged irqbalance issue-generator kbdsettings klog lvm2-monitor nsqd nvmefc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wickedd wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autostart-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievfd issue-add-ssh-keys kexec-load lumask man-db-create multipathd ndctl-monitor nfs nfs-blkmap nvmf-autoconnect rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd svnservice systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned udisks2 vncserver@
indirect	wickedd

---

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default  
root=UUID=1821a225-9785-4821-9a33-99bd3ded8cae  
splash=silent  
mitigations=auto  
quiet  
security=apparmor

---

14. cpupower frequency-info

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.90 GHz, Intel Xeon Gold 6542Y)

SPECspeed®2017\_fp\_base = 336

SPECspeed®2017\_fp\_peak = 336

CPU2017 License: 9016

Test Date: Apr-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

## Platform Notes (Continued)

```
analyzing CPU 0:  
    current policy: frequency should be within 800 MHz and 4.10 GHz.  
        The governor "performance" may decide which speed to use  
        within this range.  
boost state support:  
    Supported: yes  
    Active: yes
```

```
-----  
15. tuned-adm active  
It seems that tuned daemon is not running, preset profile is not activated.  
Preset profile: latency-performance
```

```
-----  
16. sysctl  
kernel.numa_balancing          1  
kernel.randomize_va_space       2  
vm.compaction_proactiveness    20  
vm.dirty_background_bytes       0  
vm.dirty_background_ratio      10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs     3000  
vm.dirty_ratio                 20  
vm.dirty_writeback_centisecs   500  
vm.dirtytime_expire_seconds    43200  
vm.extfrag_threshold           500  
vm.min_unmapped_ratio          1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy      0  
vm.nr_overcommit_hugepages     0  
vm.swappiness                  60  
vm.watermark_boost_factor      15000  
vm.watermark_scale_factor      10  
vm.zone_reclaim_mode           0
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage  
defrag           always defer defer+madvise [madvise] never  
enabled          [always] madvise never  
hpage_pmd_size  2097152  
shmem_enabled    always within_size advise [never] deny force
```

```
-----  
18. /sys/kernel/mm/transparent_hugepage/khugepaged  
alloc_sleep_millisecs  60000  
defrag              1  
max_ptes_none       511  
max_ptes_shared     256  
max_ptes_swap       64  
pages_to_scan        4096  
scan_sleep_millisecs 10000
```

```
-----  
19. OS release  
From /etc/*-release /etc/*-version  
os-release SUSE Linux Enterprise High Performance Computing 15 SP5
```

```
-----  
20. Disk information  
SPEC is set to: /ic24u0
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.90 GHz, Intel Xeon Gold 6542Y)

SPECSpeed®2017\_fp\_base = 336

SPECSpeed®2017\_fp\_peak = 336

CPU2017 License: 9016

Test Date: Apr-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

## Platform Notes (Continued)

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p8  xfs   1.3T  102G  1.2T   9%  /
```

```
21. /sys/devices/virtual/dmi/id
Vendor:          ASUSTeK COMPUTER INC.
Product:         RS720-E11-RS12U
Product Family: Server
Serial:          R1S0MD000002
```

```
22. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
16x Samsung M321R8GA0PB0-CWMXJ 64 GB 2 rank 5600, configured at 5200
```

```
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      American Megatrends Inc.
BIOS Version:     2201
BIOS Date:        12/22/2023
BIOS Revision:    22.1
```

## Compiler Version Notes

```
=====
C           | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====
```

```
=====
C++, C, Fortran | 607.cactusBSSN_s(base, peak)
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====
```

```
=====
Fortran      | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
=====
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====
```

```
=====
Fortran, C    | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
=====
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
=====
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.90 GHz, Intel Xeon Gold 6542Y)

SPECspeed®2017\_fp\_base = 336

SPECspeed®2017\_fp\_peak = 336

CPU2017 License: 9016

Test Date: Apr-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

## Compiler Version Notes (Continued)

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactubSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-fsto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC\_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.90 GHz, Intel Xeon Gold 6542Y)

SPECspeed®2017\_fp\_base = 336

SPECspeed®2017\_fp\_peak = 336

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.90 GHz, Intel Xeon Gold 6542Y)

SPECspeed®2017\_fp\_base = 336

SPECspeed®2017\_fp\_peak = 336

CPU2017 License: 9016

Test Date: Apr-2024

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Dec-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Dec-2023

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids
-Ofast -ffast-math -fsto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

```
627.cam4_s: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -fsto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactubSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTeKPlatform-Settings-z13-V1.3.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTeKPlatform-Settings-z13-V1.3.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.90 GHz, Intel Xeon Gold 6542Y)

**SPECSpeed®2017\_fp\_base = 336**

**SPECSpeed®2017\_fp\_peak = 336**

**CPU2017 License:** 9016

**Test Date:** Apr-2024

**Test Sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Dec-2023

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Dec-2023

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-04-10 02:26:11-0400.

Report generated on 2024-05-07 22:12:46 by CPU2017 PDF formatter v6716.

Originally published on 2024-05-07.