



# SPEC<sup>®</sup> MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## IBM

SPECmpiM\_peak2007 = Not Run

### iDP (Intel Xeon L5420, 2.50 GHz)

SPECmpiM\_base2007 = 18.1

MPI2007 license: 3440


Test sponsor: Indiana University

Tested by: Scott Teige

Test date: Dec-2009

Hardware Availability: Dec-2007

Software Availability: Jan-2009

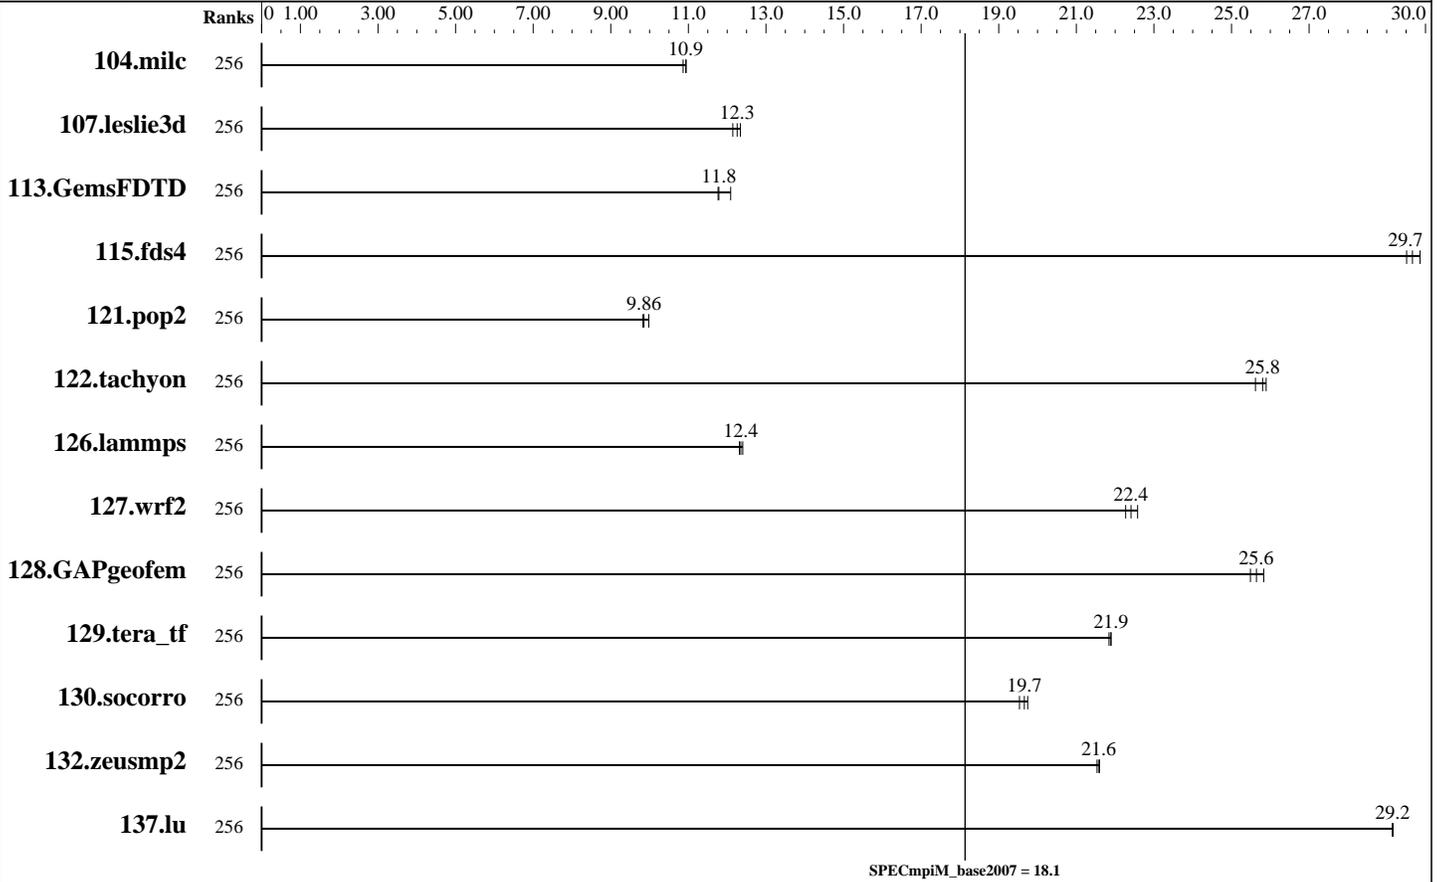

## Results Table

Benchmark	Base								Peak					
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
104.milc	256	144	10.9	<b>143</b>	<b>10.9</b>	143	10.9							
107.leslie3d	256	<b>426</b>	<b>12.3</b>	423	12.3	430	12.1							
113.GemsFDTD	256	536	11.8	522	12.1	<b>535</b>	<b>11.8</b>							
115.fds4	256	65.3	29.9	66.1	29.5	<b>65.8</b>	<b>29.7</b>							
121.pop2	256	414	9.98	420	9.83	<b>419</b>	<b>9.86</b>							
122.tachyon	256	108	25.9	109	25.6	<b>108</b>	<b>25.8</b>							
126.lammps	256	235	12.4	237	12.3	<b>236</b>	<b>12.4</b>							
127.wrf2	256	350	22.3	<b>348</b>	<b>22.4</b>	345	22.6							
128.GAPgeofem	256	79.9	25.8	<b>80.5</b>	<b>25.6</b>	81.0	25.5							
129.tera_tf	256	<b>126</b>	<b>21.9</b>	127	21.8	126	21.9							

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## IBM

SPECmpiM\_peak2007 = Not Run

### iDP (Intel Xeon L5420, 2.50 GHz)

SPECmpiM\_base2007 = 18.1

MPI2007 license: 3440

Test sponsor: Indiana University

Tested by: Scott Teige

Test date: Dec-2009

Hardware Availability: Dec-2007

Software Availability: Jan-2009

## Results Table (Continued)

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
130.socorro	256	193	19.7	<b>194</b>	<b>19.7</b>	195	19.5							
132.zeusmp2	256	<b>144</b>	<b>21.6</b>	144	21.5	144	21.6							
137.lu	256	126	29.2	126	29.1	<b>126</b>	<b>29.2</b>							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Hardware Summary

Type of System: Homogeneous  
 Compute Node: iDP node  
 Interconnects: Gigabit Ethernet  
 IB Switch  
 Total Compute Nodes: 32  
 Total Chips: 64  
 Total Cores: 256  
 Total Threads: 256  
 Total Memory: 1 TB  
 Base Ranks Run: 256  
 Minimum Peak Ranks: --  
 Maximum Peak Ranks: --

### Software Summary

C Compiler: Intel C++ Compiler 11.1 for Linux (11.1.038)  
 C++ Compiler: Intel C++ Compiler 11.1 for Linux (11.1.038)  
 Fortran Compiler: Intel Fortran Compiler 11.1 for Linux (11.1.038)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 MPI Library: OpenMPI 1.3.1  
 Other MPI Info: None  
 Pre-processors: No  
 Other Software: OpenMPI 1.3.1

## Node Description: iDP node

### Hardware

Number of nodes: 32  
 Uses of the node: compute  
 Vendor: IBM  
 Model: System x iDataPlex dx340  
 CPU Name: Intel Xeon L5420  
 CPU(s) orderable: 1-2 chips  
 Chips enabled: 2  
 Cores enabled: 8  
 Cores per chip: 4  
 Threads per core: 1  
 CPU Characteristics: 1333 MHz FSB  
 CPU MHz: 2500  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 32 GB (FBDIMM 8x4-GB 667 MHz)  
 Disk Subsystem: Western Digital 160 GB SATA WD160YS-23SHBO  
 Other Hardware: None  
 Adapter: Intel Corporation 80003ES2LAN Gigabit Ethernet Controller (Copper) (rev 01)  
 Number of Adapters: 2  
 Slot Type: --  
 Data Rate: Gigabit Ethernet

### Software

Adapter: Intel Corporation 80003ES2LAN Gigabit Ethernet Controller (Copper) (rev 01)  
 Adapter Driver: e1000e version 1.0.2-k2  
 Adapter Firmware: 2.4-0  
 Adapter: Mellanox Technologies MT26418 [ConnectX IB DDR, PCIe 2.0 5GT/s] (rev a0)  
 Adapter Driver: OFED 1.4.1  
 Adapter Firmware: 2.5.0  
 Operating System: RedHat ELv5.4 (x86\_64)  
 2.6.18-92.1.17.el5\_lustre.1.6.7.1custom-perfctr-2  
 Local File System: Linux/ext3  
 Shared File System: IBM N5500 NAS via NFSv3  
 System State: Multi-User  
 Other Software: --

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

IBM

SPECmpiM\_peak2007 = Not Run

iDP (Intel Xeon L5420, 2.50 GHz)

SPECmpiM\_base2007 = 18.1

MPI2007 license: 3440

Test sponsor: Indiana University

Tested by: Scott Teige

Test date: Dec-2009

Hardware Availability: Dec-2007

Software Availability: Jan-2009

## Node Description: iDP node

Ports Used:	1
Interconnect Type:	Ethernet
Adapter:	Mellanox Technologies MT26418 [ConnectX IB DDR, PCIe 2.0 5GT/s] (rev a0)
Number of Adapters:	1
Slot Type:	PCIe x8 Gen2
Data Rate:	InfiniBand 4x DDR
Ports Used:	1
Interconnect Type:	InfiniBand

## Interconnect Description: Gigabit Ethernet

	Hardware	Software
Vendor:	ProCurve Networking	
Model:	HP ProCurve Switch 5406zl Intelligent Edge J8697A	
Switch Model:	HP ProCurve Switch 5406zl Intelligent Edge J8697A	
Number of Switches:	1	
Number of Ports:	144	
Data Rate:	1Gbps Ethernet	
Firmware:	--	
Topology:	Single switch	
Primary Use:	Cluster File System	

## Interconnect Description: IB Switch

	Hardware	Software
Vendor:	Cisco	
Model:	Cisco SFS 7024D	
Switch Model:	Cisco SFS 7024D	
Number of Switches:	1	
Number of Ports:	288	
Data Rate:	InfiniBand 4x DDR	
Firmware:	4.1.1.1.11	
Topology:	Single switch	
Primary Use:	MPI traffic	

## Submit Notes

The config file option 'submit' was used.



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

**IBM**

SPECmpiM\_peak2007 = Not Run

**iDP (Intel Xeon L5420, 2.50 GHz)**

SPECmpiM\_base2007 = 18.1

**MPI2007 license:** 3440

**Test sponsor:** Indiana University

**Tested by:** Scott Teige

**Test date:** Dec-2009

**Hardware Availability:** Dec-2007

**Software Availability:** Jan-2009

## Base Compiler Invocation

C benchmarks:

mpicc

C++ benchmarks:

126.lammps: mpicxx

Fortran benchmarks:

mpif90

Benchmarks using both Fortran and C:

mpicc mpif90

## Base Portability Flags

121.pop2: -DSPEC\_MPI\_CASE\_FLAG

126.lammps: -DMPICH\_IGNORE\_CXX\_SEEK

127.wrf2: -DSPEC\_MPI\_LINUX -DSPEC\_MPI\_CASE\_FLAG

## Base Optimization Flags

C benchmarks:

-O3 -xT -ipo -no-prec-div

C++ benchmarks:

126.lammps: -O3 -xT -ipo -no-prec-div

Fortran benchmarks:

-O3 -xT -ipo -no-prec-div

Benchmarks using both Fortran and C:

-O3 -xT -ipo -no-prec-div

The flags file that was used to format this result can be browsed at

[http://www.spec.org/mpi2007/flags/EM64T\\_Intel101\\_flags.20100128.html](http://www.spec.org/mpi2007/flags/EM64T_Intel101_flags.20100128.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/mpi2007/flags/EM64T\\_Intel101\\_flags.20100128.xml](http://www.spec.org/mpi2007/flags/EM64T_Intel101_flags.20100128.xml)



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

IBM

SPECmpiM\_peak2007 = Not Run

iDP (Intel Xeon L5420, 2.50 GHz)

SPECmpiM\_base2007 = 18.1

MPI2007 license: 3440

Test sponsor: Indiana University

Tested by: Scott Teige

Test date: Dec-2009

Hardware Availability: Dec-2007

Software Availability: Jan-2009

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC MPI2007 v1.1.  
Report generated on Tue Jul 22 13:39:35 2014 by SPEC MPI2007 PS/PDF formatter v1463.  
Originally published on 27 January 2010.