



SPEC® MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Lenovo

SPECmpiM_peak2007 = 81.8

ThinkSystem SR665 V3 (AMD EPYC 9654)

SPECmpiM_base2007 = 81.8

MPI2007 license: 28


Test date: Jan-2023

Test sponsor: Lenovo

Hardware Availability: Feb-2023

Tested by: Lenovo

Software Availability: Feb-2023

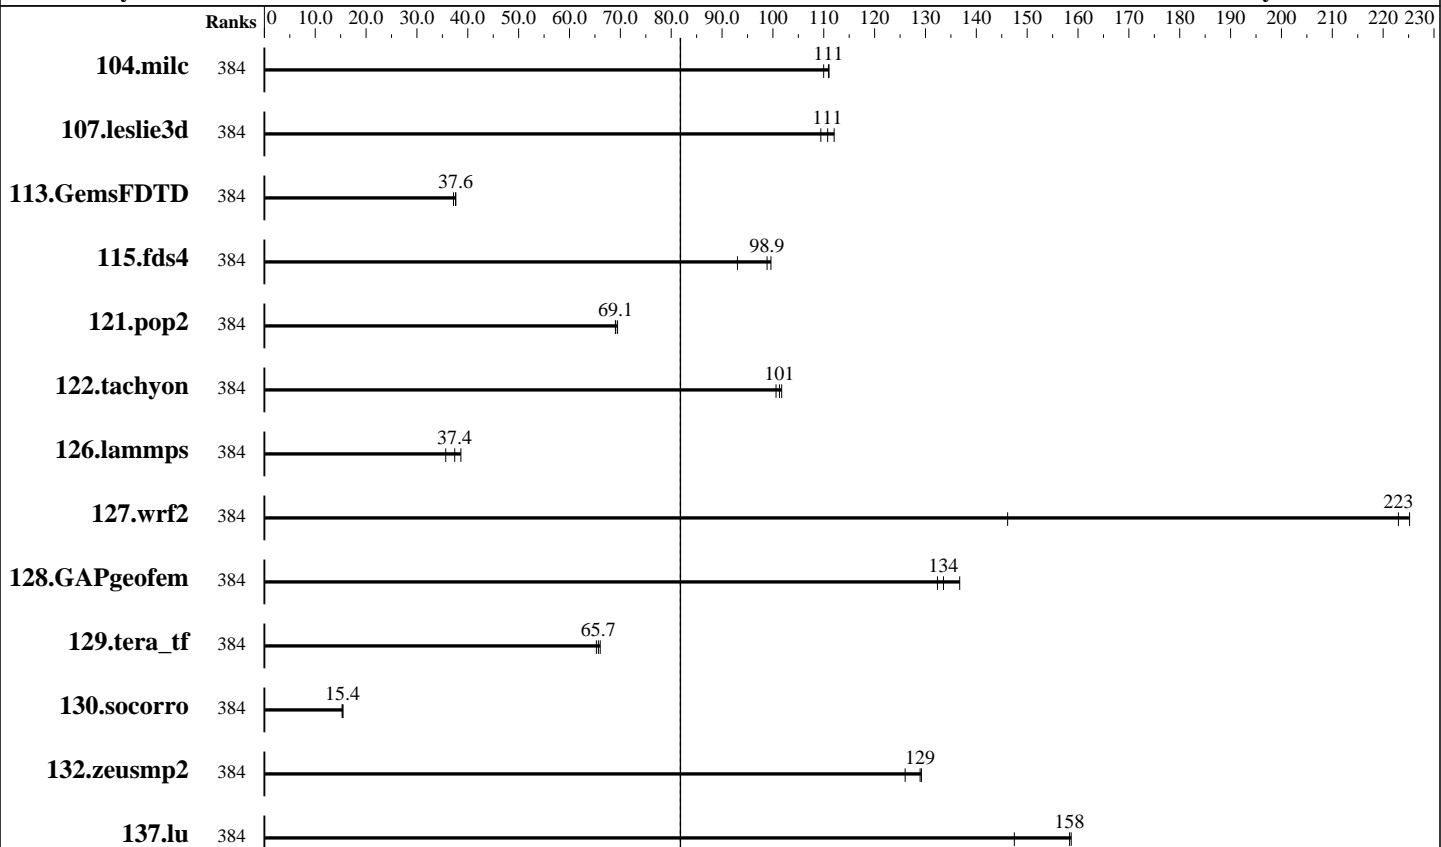

SPECmpiM_base2007 = 81.8

SPECmpiM_peak2007 = 81.8

Results Table

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
104.milc	384	14.2	110	<u>14.1</u>	<u>111</u>	14.1	111	384	14.2	110	<u>14.1</u>	<u>111</u>	14.1	111	14.1	111
107.leslie3d	384	47.7	109	46.6	112	<u>47.1</u>	<u>111</u>	384	47.7	109	46.6	112	<u>47.1</u>	<u>111</u>	47.1	<u>111</u>
113.GemsFDTD	384	<u>168</u>	<u>37.6</u>	168	37.7	170	37.2	384	<u>168</u>	<u>37.6</u>	168	37.7	170	37.2	170	37.2
115.fds4	384	21.0	93.0	<u>19.7</u>	<u>98.9</u>	19.6	99.6	384	21.0	93.0	<u>19.7</u>	<u>98.9</u>	19.6	99.6	19.6	99.6
121.pop2	384	<u>59.7</u>	<u>69.1</u>	59.8	69.0	59.4	69.5	384	<u>59.7</u>	<u>69.1</u>	59.8	69.0	59.4	69.5	59.4	69.5
122.tachyon	384	<u>27.6</u>	<u>101</u>	27.5	102	27.8	101	384	<u>27.6</u>	<u>101</u>	27.5	102	27.8	101	27.8	101
126.lammps	384	81.7	35.7	<u>77.9</u>	<u>37.4</u>	75.4	38.6	384	81.7	35.7	<u>77.9</u>	<u>37.4</u>	75.4	38.6	75.4	38.6
127.wrf2	384	34.6	225	53.3	146	<u>35.0</u>	<u>223</u>	384	34.6	225	53.3	146	<u>35.0</u>	<u>223</u>	35.0	223
128.GAPgeomfem	384	<u>15.5</u>	<u>134</u>	15.1	137	15.6	132	384	<u>15.5</u>	<u>134</u>	15.1	137	15.6	132	15.6	132
129.tera_tf	384	<u>42.1</u>	<u>65.7</u>	42.4	65.3	41.9	66.0	384	<u>42.1</u>	<u>65.7</u>	42.4	65.3	41.9	66.0	41.9	66.0

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Lenovo

SPECmpiM_peak2007 = 81.8

ThinkSystem SR665 V3 (AMD EPYC 9654)

SPECmpiM_base2007 = 81.8

MPI2007 license: 28

Test date: Jan-2023

Test sponsor: Lenovo

Hardware Availability: Feb-2023

Tested by: Lenovo

Software Availability: Feb-2023

Results Table (Continued)

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
130.socorro	384	250	15.3	248	15.4	247	15.4	384	250	15.3	248	15.4	247	15.4	247	15.4
132.zeusmp2	384	24.6	126	24.0	129	24.1	129	384	24.6	126	24.0	129	24.1	129	24.1	129
137.lu	384	23.2	158	23.2	159	24.9	147	384	23.2	158	23.2	159	24.9	147	24.9	147

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Hardware Summary

Type of System: Homogeneous
 Compute Node: ThinkSystem SR665 V3
 Total Compute Nodes: 2
 Total Chips: 4
 Total Cores: 192
 Total Threads: 384
 Total Memory: 1536 GB
 Base Ranks Run: 384
 Minimum Peak Ranks: 384
 Maximum Peak Ranks: 384

Software Summary

C Compiler: AMD Optimizing C/C++ and Fortran Compilers (AOCC)
 Version 4.0.0 Build 389 for Linux
 C++ Compiler: AMD Optimizing C/C++ and Fortran Compilers (AOCC)
 Version 4.0.0 Build 389 for Linux
 Fortran Compiler: AMD Optimizing C/C++ and Fortran Compilers (AOCC)
 Version 4.0.0 Build 389 for Linux
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 MPI Library: Open MPI Library for Linux
 Version 4.1.1
 Other MPI Info: None
 Pre-processors: No
 Other Software: None

Node Description: ThinkSystem SR665 V3

Hardware

Number of nodes: 2
 Uses of the node: compute
 Vendor: Lenovo
 Model: ThinkSystem SR665 V3
 CPU Name: AMD EPYC 9654
 CPU(s) orderable: 1, 2 chip
 Chips enabled: 2
 Cores enabled: 96
 Cores per chip: 96
 Threads per core: 2
 CPU Characteristics: Max. Boost Clock upto 3.7 GHz
 CPU MHz: 2400
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core
 L3 Cache: 384 MB I+D on chip per chip
 32 MB shared / 8 cores
 Other Cache: None
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)
 Disk Subsystem: 1x ThinkSystem 2.5" 5300 480GB SSD
 Other Hardware:
 Adapter: Mellanox ConnectX-6 HDR
 Number of Adapters: 1
 Slot Type: PCIe Gen5 x16
 Data Rate: 200Gb

Software

Adapter: Mellanox ConnectX-6 HDR
 Adapter Driver: Mellanox
 Adapter Firmware: 20.28.1002
 Operating System: Red Hat Enterprise Linux Server release 8.6,
 Kernel 4.18.0-372.9.1.el8.x86_64
 Local File System: ext4
 Shared File System: None
 System State: Multi-user, run level 3
 Other Software: None

Continued on next page



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Lenovo

SPECmpiM_peak2007 = 81.8

ThinkSystem SR665 V3 (AMD EPYC 9654)

SPECmpiM_base2007 = 81.8

MPI2007 license: 28

Test date: Jan-2023

Test sponsor: Lenovo

Hardware Availability: Feb-2023

Tested by: Lenovo

Software Availability: Feb-2023

Node Description: ThinkSystem SR665 V3

Ports Used: 1
Interconnect Type: Mellanox ConnectX-6 HDR

Submit Notes

The config file option 'submit' was used.

General Notes

MPI startup command:

mpieexec command was used to start MPI jobs.

Yes: The test sponsor attests, as of date of publication,

that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication,

that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication,

that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Base Compiler Invocation

C benchmarks:
mpicc

C++ benchmarks:

126.lammps: mpicc++

Fortran benchmarks:
mpif90

Benchmarks using both Fortran and C:
mpicc mpif90

Base Portability Flags

104.milc: -DSPEC_MPI_LP64

115.fds4: -DSPEC_MPI_LP64

121.pop2: -DSPEC_MPI_CASE_FLAG -DSPEC_MPI_LP64

122.tachyon: -DSPEC_MPI_LP64

127.wrf2: -DSPEC_MPI_CASE_FLAG -DSPEC_MPI_LINUX -DSPEC_MPI_LP64

128.GAPgeomfem: -DSPEC_MPI_LP64

130.socorro: -DSPEC_MPI_LP64

132.zeusmp2: -DSPEC_MPI_LP64



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Lenovo

SPECmpiM_peak2007 = 81.8

ThinkSystem SR665 V3 (AMD EPYC 9654)

SPECmpiM_base2007 = 81.8

MPI2007 license: 28

Test date: Jan-2023

Test sponsor: Lenovo

Hardware Availability: Feb-2023

Tested by: Lenovo

Software Availability: Feb-2023

Base Optimization Flags

C benchmarks:

```
-Ofast -flto -ffast-math -march=znver4 -lamdlibm
```

C++ benchmarks:

```
126.lammps: -Ofast -flto -ffast-math -march=znver4  
           -DMPICH_IGNORE_CXX_SEEK
```

Fortran benchmarks:

```
-Ofast -flto -ffast-math -march=znver4 -funroll-loops
```

Benchmarks using both Fortran and C:

```
115.fds4: -Ofast -flto -ffast-math -march=znver4 -funroll-loops
```

```
121.pop2: Same as 115.fds4
```

```
127.wrf2: Same as 115.fds4
```

```
128.GAPgeofem: -Ofast -flto -ffast-math -march=znver4 -funroll-loops  
                -lamdlibm
```

```
130.socorro: Same as 115.fds4
```

```
132.zeusmp2: Same as 115.fds4
```

Base Other Flags

Benchmarks using both Fortran and C:

```
127.wrf2: -Wno-return-type
```

Peak Optimization Flags

C benchmarks:

```
104.milc: basepeak = yes
```

```
122.tachyon: basepeak = yes
```

C++ benchmarks:

```
126.lammps: basepeak = yes
```

Fortran benchmarks:

Continued on next page



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Lenovo

SPECmpiM_peak2007 = 81.8

ThinkSystem SR665 V3 (AMD EPYC 9654)

SPECmpiM_base2007 = 81.8

MPI2007 license: 28

Test date: Jan-2023

Test sponsor: Lenovo

Hardware Availability: Feb-2023

Tested by: Lenovo

Software Availability: Feb-2023

Peak Optimization Flags (Continued)

107.leslie3d: basepeak = yes

113.GemsFDTD: basepeak = yes

129.tera_tf: basepeak = yes

137.lu: basepeak = yes

Benchmarks using both Fortran and C:

115.fds4: basepeak = yes

121.pop2: basepeak = yes

127.wrf2: basepeak = yes

128.GAPgeofem: basepeak = yes

130.socorro: basepeak = yes

132.zeusmp2: basepeak = yes

The flags file that was used to format this result can be browsed at

http://www.spec.org/mpi2007/flags/amd2021_flags.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/mpi2007/flags/amd2021_flags.xml

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC MPI2007 v2.0.1.

Report generated on Wed Feb 22 13:33:10 2023 by SPEC MPI2007 PS/PDF formatter v1463.

Originally published on 22 February 2023.