CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI
SGI Origin 3400 32X 400MHz R12k

SPECfp_rate2000 = 134

SPECfp_rate_base2000 = 125

SPEC license #: 4 | Tested by: SGI | Test date: Aug-2000 | Hardware Avail: Sep-2000 | Software Avail: Sep-2000

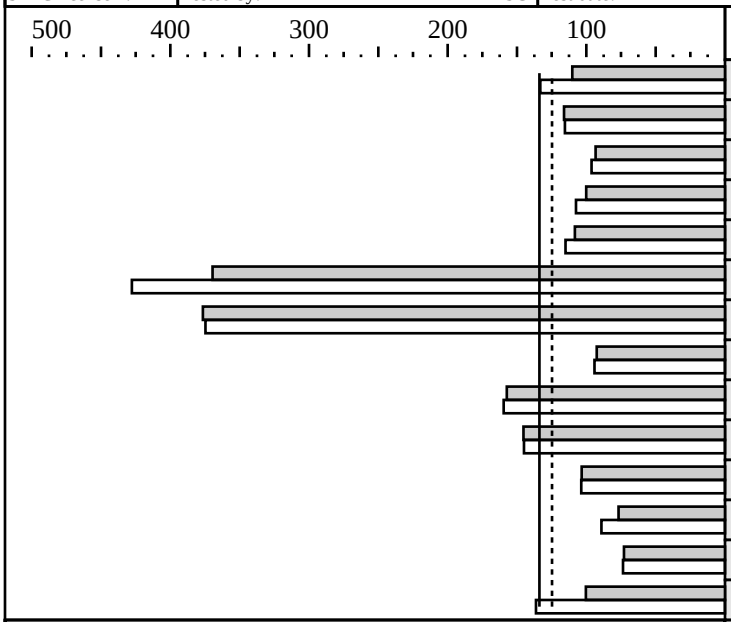

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	32	539	110	32	446	133
171.swim	32	991	116	32	997	115
172.mgrid	32	716	93.3	32	694	96.2
173.applu	32	779	100	32	725	107
177.mesa	32	480	108	32	452	115
178.galgel	32	291	370	32	252	428
179.art	32	256	377	32	258	375
183.equake	32	522	92.5	32	513	94.1
187.facerec	32	448	157	32	442	160
188.ammp	32	562	145	32	563	145
189.lucas	32	718	103	32	716	104
191.fma3d	32	1015	76.8	32	875	89.1
200.sixtrack	32	560	72.9	32	555	73.5
301.apsi	32	962	100	32	708	136

Hardware

CPU:	R12000
CPU MHz:	400
FPU:	Integrated
CPU(s) enabled:	32 cores, 32 chips, 1 core/chip
CPU(s) orderable:	4-32
Parallel:	No
Primary Cache:	32KBI + 32KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	32GB
Disk Subsystem:	1 x 18 GB FC, 12 x 18 GB FC (striped)
Other Hardware:	None

Software

Operating System:	IRIX 6.5.9m
Compiler:	MIPSpro 7.3.1.1m C, C++, Fortran90 SCSL 1.2 Math Library
File System:	xfs
System State:	Single-user

Notes/Tuning Information

```
Baseline optimization flags (for C benchmarks):
   PASS1 : -Ofast=ip27 -IPA:use_intrinsic -fb_create /tmp/SPEC2000/FBDIR_base/$(EXEBASE)
   PASS2 : -Ofast=ip27 -IPA:use_intrinsic -fb_opt /tmp/SPEC2000/FBDIR_base/$(EXEBASE)
Baseline optimization flags (for Fortran benchmarks): -Ofast=ip27 -LNO:fusion=2
Portability Flags:
   178.galgel: -fixedform
Peak optimization flags:
note:  all occurrences of (FEEDBACK) below means compiled with a two-step process:
   PASS1 = -fb_create /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
   PASS2 = -fb_opt /tmp/SPEC2000/FBDIR_peak/$(EXEBASE)
168.wupwise: -Ofast=ip27 -IPA:space=1000:linear=on:plimit=10000:callee_limit=5000 -INLINE:aggressive=on
.            -OPT:Olimit=0 -LNO:fusion=2:prefetch_ahead=5
171.swim: -Ofast=ip27 -LNO:cs2=8m
172.mgrid: -Ofast=ip27 -LNO:cs2=8m:blocking=off
173.applu: -Ofast=ip27 -LNO:ou_max=5:ou_prod_max=10:prefetch=0:fusion=2
177.mesa: -Ofast=ip27 -OPT:goto=off -LNO:opt=0 (FEEDBACK)
178.galgel: -Ofast=ip27 -LNO:ou_max=7 -lscs (FEEDBACK)
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

SGI
SGI Origin 3400 32X 400MHz R12k

SPECfp_rate2000 = 134
SPECfp_rate_base2000 = 125

SPEC license #: 4 | Tested by: SGI | Test date: Aug-2000 | Hardware Avail: Sep-2000 | Software Avail: Sep-2000

Notes/Tuning Information (Continued)

```
.           RM_SOURCES = lapak.f90
179.art: -Ofast=ip27 -bigp_off -LNO:prefetch=0 -IPA:min_hot=15 (FEEDBACK)
183.equake: -Ofast=ip27 -LNO:prefetch=0 -TENV:X=4  -CG:ld_latency=7 -IPA:space=500 (FEEDBACK)
187.facerec: -Ofast=ip27 -fb_opt /tmp/SPEC2000/FBDIR_peak/$(EXEBASE) -LNO:fusion=2 (FEEDBACK)
188.ammp: -Ofast=ip27 -OPT:goto=off -IPA:space=500:plimit=900 (FEEDBACK)
189.lucas: -Ofast=ip27 -LNO:fusion=2:blocking=off -CG:ld_latency=4 -IPA:min_hot=8 (FEEDBACK)
191.fma3d: -Ofast=ip27 -bigp_off -LNO:prefetch=0 -OPT:goto=off:unroll_size=160:unroll_times_max=4
.           -CG:ld_latency=2 (FEEDBACK)
200.sixtrack:= -Ofast=ip27 -IPA:maxdepth=2 -LNO:prefetch=0 (FEEDBACK)
301.apsi: -Ofast=ip27 -TENV:X=4 -LNO:prefetch=0:blocking=off -IPA:linear=on:use_intrinsic
   setenv PAGESIZE_DATA 4096 ; setenv PAGESIZE_TEXT 4096 ; setenv PAGESIZE_STACK 4096
   systune -i ; percent_totalmem_4m_pages = 40 ; percent_totalmem_1m_pages = 7
   systune -i ; percent_totalmem_256k_pages = 7 ; percent_totalmem_64k_pages = 7
   limit stacksize 500000
The following is done before building each benchmark that requires (FEEDBACK):
 rm -rf /tmp/SPEC2000/FBDIR_peak/$baseexe ; mkdir -p /tmp/SPEC2000/FBDIR_peak/$baseexe
```