CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Fujitsu Limited
PRIMEPOWER400 (600MHz)

SPECfp_rate2000 = 18.0

SPECfp_rate_base2000 = 13.1

SPEC license #: 19 | Tested by: Fujitsu Limited | Test date: Sep-2001 | Hardware Avail: Aug-2001 | Software Avail: Dec-2001

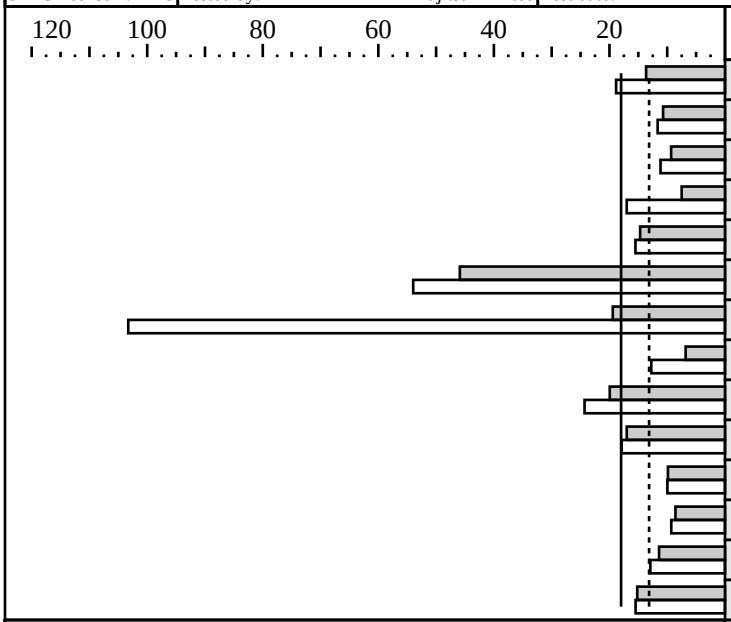

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	4	544	13.7	4	394	18.8
171.swim	4	1342	10.7	4	1234	11.7
172.mgrid	4	896	9.33	4	748	11.2
173.applu	4	1299	7.50	4	573	17.0
177.mesa	4	442	14.7	4	419	15.5
178.galgel	4	293	45.9	4	249	54.0
179.art	4	621	19.4	4	117	103
183.equake	4	885	6.81	4	473	12.8
187.facerec	4	442	19.9	4	363	24.3
188.ammp	4	600	17.0	4	571	17.9
189.lucas	4	940	9.88	4	931	9.97
191.fma3d	4	1137	8.57	4	1048	9.30
200.sixtrack	4	447	11.4	4	395	12.9
301.apsi	4	794	15.2	4	780	15.5

Hardware

CPU:	SPARC64 GP
CPU MHz:	600
FPU:	Integrated
CPU(s) enabled:	4 cores, 4 chips, 1 core/chip
CPU(s) orderable:	1 to 4
Parallel:	None
Primary Cache:	128KBI+128KBD on chip
Secondary Cache:	8MB(I+D) off chip, per CPU
L3 Cache:	None
Other Cache:	None
Memory:	8192MB
Disk Subsystem:	1 x 36.4GB SCSI (10000rpm)
Other Hardware:	None

Software

Operating System:	Solaris 8 7/01
Compiler:	Fujitsu Parallelnavi 1.0.2 with patch 911403-01 Sun Forte Developer 6 update 2
File System:	ufs
System State:	single user

Notes/Tuning Information

```
FDO: (Parallelnavi 1.0.2)
    fdo_pre0=rm -rf ‘pwd‘/*.*.d
    PASS1=-Kpg    PASS2=-Kpu
FDO: (Forte Developer 6 update 2)
    fdo_pre0=rm -rf ‘pwd‘/../feedback.profile
    PASS1=-xprofile=collect:‘pwd‘/../feedback
    PASS2=-xprofile=use:‘pwd‘/../feedback
Baseline :
(using Fortran compiler of Parallelnavi 1.0.2)
-Kfast_GP=2,largepage -O4 -fs FDO

(using C compiler of Parallelnavi 1.0.2)
-Kfast_GP=2,largepage FDO

Peak:
(using Fortran compiler of Parallelnavi 1.0.2)
 168.wupwise: -Kfast_GP=2,prefetch=4,nounroll,largepage -x dir=‘pwd‘/../../src -fs
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 171.swim: -Kfast_GP=2,GREG,preex,ilfunc,prefetch=3,commonpad=152,prefetch_iteration=3,unroll=2,nogs,frecipro
    -O4 -dn -fs
 172.mgrid: -Kfast_GP=2,preex,GREG,commonpad=144,unroll=3,prefetch=3
    -O4 -dn -fs
 178.galgel: -Kfast_GP=2,GREG,largepage,preex,unroll=2,prefetch_iteration=2,commonpad=24
    -O4 -lssl2mtfma -fs FDO
    RM_SOURCES=lapak.f90
 189.lucas: -Kfast_GP=2,GREG,preex,largepage,nounroll -O4 -fs FDO
 191.fma3d: -Kfast_GP=2,preex,GREG,nounroll,V9FMADD,prefetch=4 -O4 -fs FDO
 200.sixtrack: -Kfast_GP=2,GREG,noprefetch,unroll=4,largepage,frecipro -fs
 301.apsi: -Kfast_GP=2,GREG,preex,largepage,unroll=2 -O4 -fs FDO

(using C compiler of Parallelnavi 1.0.2)
 188.ammp: -Kfast_GP=2,GREG,popt,prefetch=4,preex,preload,largepage,fuse,unroll=3 -x-

(using FORTRAN77 compiler of Forte Developer 6 update 2)
 173.applu: -fast -Qoption iropt -whole,-Adata_access,-Mt6000,-Mm12000,-Mr40000,-Ma400 -xarch=v8plus -dn
    ONESTEP=yes

(using FORTRAN90 compiler of Forte Developer 6 update 2)
 187.facerec: -fast -xarch=v9 FDO ONESTEP=yes

(using C compiler of Forte Developer 6 update 2)
 177.mesa: -fast -xcrossfile -xrestrict -xalias_level=std -xregs=syst -Wc,-Qgsched-trace_late=1,-Qgsched-trace_spec_load=1
    -xarch=v8plus -W2,-Amemopt -dn
    FDO ONESTEP=yes
 179.art: -fast -xalias_level=strong -xdepend -xregs=syst -W2,-whole,-Amemopt
    -xarch=v8plus -lmopt -lm -dn FDO ONESTEP=yes
 183.equake: -fast -xalias_level=strong -xdepend -W2,-whole,-Amemopt
    -xarch=v8plus -lmopt -lm FDO ONESTEP=yes

Portability:
 (for Parallelnavi 1.0.2)
   178.galgel: -Am -Fixed
   187.facerec: -Am
   191.fma3d: -Am

Note:
 System Tunables: (for /etc/system)
  consistent_coloring=1, tune_t_fsflushr=86400, autoup=86400,
  shmsys:shminfo_shmmax=8589934592, shmsys:shminfo_shmmni=1024, shmsys:shminfo_shmseg=1024
 (for /etc/opt/FJSVpnrm/lpg.conf)
  TSS=512M, SHMSEGSIZE=256M
 Feedback directed optimization was used for all baseline benchmarks and peak benchmarks
 except following peak benchmarks: 171.swim, 172.mgrid, 173.applu, 188.ammp, 200.sixtrack.
```