CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Advanced Micro Devices

Tyan Thunder K7 Motherboard, AMD Athlon (TM) MP 1500+

SPECint2000 = 554

SPECint_base2000 = 534

SPEC license #: 49 | Tested by: AMD Austin TX | Test date: Sep-2001 | Hardware Avail: Oct-2001 | Software Avail: Jul-2001

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	211	663	208	672
175.vpr	1400	437	321	407	344
176.gcc	1100	292	377	244	451
181.mcf	1800	808	223	804	224
186.crafty	1000	128	779	128	779
197.parser	1800	372	484	371	485
252.eon	1300	122	1067	110	1182
253.perlbmk	1800	224	804	224	804
254.gap	1100	177	621	177	622
255.vortex	1900	225	846	222	856
256.bzip2	1500	355	422	340	441
300.twolf	3000	714	420	701	428

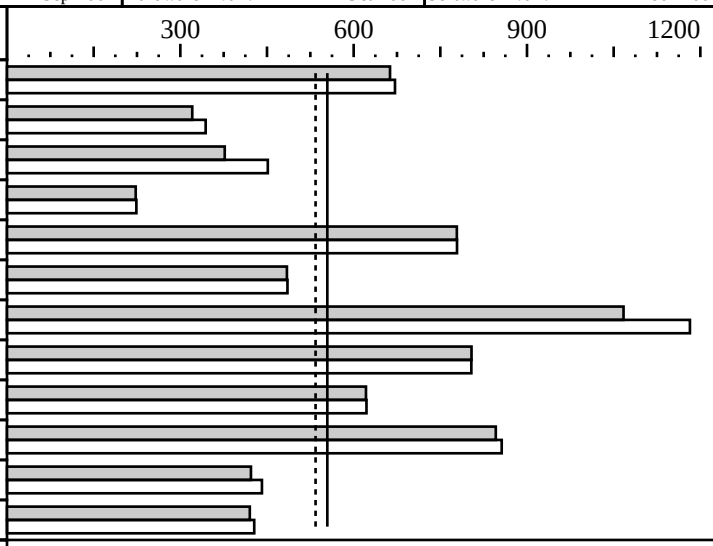

Hardware

CPU:	AMD Athlon (TM) MP 1500+
CPU MHz:	1333
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	256KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	1x256MB PC2100 DDR SDRAM CL2 Registered
Disk Subsystem:	IBM DPTA-372020
Other Hardware:	None

Software

Operating System:	Windows 2000 SP2
Compiler:	Intel C/C++ 5.0.1 build 010525Z Microsoft Visual Studio 6.0 SP5 (libraries) MicroQuill Smartheap Library 5.0
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
shlW32M.lib is the SmartHeap library V5.0 from MicroQuill www.microquill.com
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Portability:
176.gcc:   -Dalloca=_alloca /F10000000
186.crafty:   -DNT_i386
253.perlbmk:  -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap:    -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Baseline C:   -QxK -Qipo +FDO shlW32M.lib
Baseline C++: -QxK -Qipo -GX -GR
Peak tuning:
164.gzip:     -O3 -QxK -Qwp_ipo -Oi- +FDO
175.vpr:      -O3 -Qxi -QaxK -Qwp_ipo +FDO
176.gcc:      -O3 -QxK -Qwp_ipo -Oi- +FDO shlW32M.lib
181.mcf:      -O3 -Qxi -QaxK -Qwp_ipo +FDO
186.crafty:   -O3 -QxK -Qwp_ipo -Oa +FDO shlW32M.lib
197.parser:   -O3 -Qxi -QaxK -Qwp_ipo +FDO
252.eon:      -O3 -QxiM -Qwp_ipo +FDO
253.perlbmk:  -O3 -QxK -Qipo +FDO shlW32M.lib
254.gap:      -O3 -QxK -Qipo -Oi- +FDO shlW32M.lib
255.vortex:   -O3 -QxK -Qwp_ipo +FDO shlW32M.lib
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 256.bzip2:    -O3 -QxK -Oa -Qwp_ipo
 300.twolf:    -O3 -QxK -Qipo -Oa +FDO shlW32M.lib
 ONESTEP is used for all base and peak runs
The tested system can be assembled using a case such as the Chenming 601 AE-F-O,
a 460W power supply such as the Delta Electronics DPS465 AB A
The System bus runs at 266MHz
```