CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Advanced Micro Devices

Epox 8KHA+ Motherboard, AMD Athlon (TM) XP 2600+

SPECfp2000 = 710

SPECfp_base2000 = 655

SPEC license #: 49 | Tested by: AMD Austin, TX | Test date: Aug-2002 | Hardware Avail: Aug-2002 | Software Avail: Feb-2002

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	157	1020	157	1022
171.swim	3100	381	813	379	819
172.mgrid	1800	322	559	321	560
173.applu	2100	356	590	350	600
177.mesa	1400	125	1124	122	1152
178.galgel	2900	544	533	283	1026
179.art	2600	599	434	595	437
183.equake	1300	209	622	179	727
187.facerec	1900	235	808	235	809
188.ammp	2200	440	500	411	535
189.lucas	2000	289	693	286	700
191.fma3d	2100	274	765	274	765
200.sixtrack	1100	205	536	199	553
301.apsi	2600	494	526	429	605

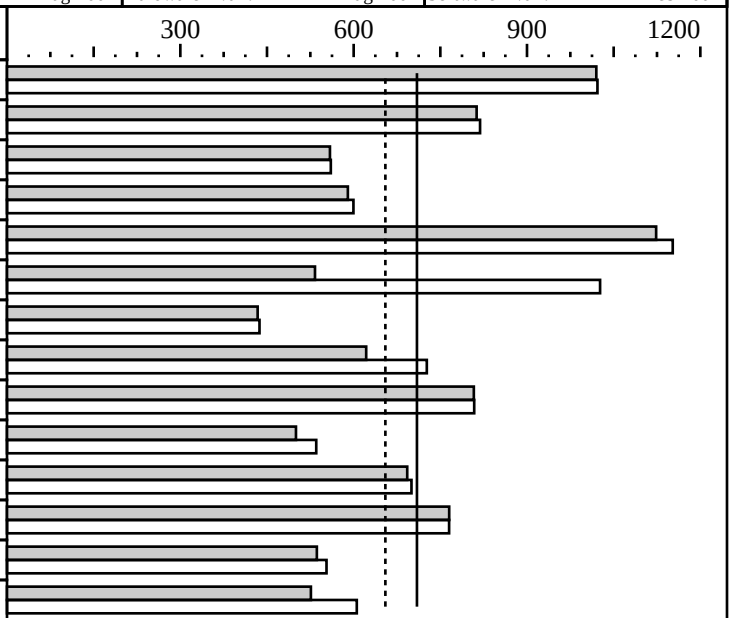

Hardware

CPU:	AMD Athlon (TM) XP 2600+
CPU MHz:	2133
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	256KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	2x256MB PC2100 DDR SDRAM CL2
Disk Subsystem:	Seagate ST320414A
Other Hardware:	None

Software

Operating System:	Windows 2000 SP2
Compiler:	Intel C++ 5.0.1 build 020125Z Intel Fortran 5.0.1 build 020125Z and Compaq Visual Fortran 6.6 Microsoft Visual Studio 6.0 SP5 (libraries) MicroQuill Smartheap Library 5.0
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
icl and ifl are the Intel C++ and Fortran compilers
f90 is the Compaq Fortran compiler
shlW32M.lib is the SmartHeap library V5.0 from MicroQuill www.microquill.com
Portability:
178.galgel: -FI -Fe$@ -link -stack:32000000
Baseline: C       icl -QxK -Qipo +FDO shlW32M.lib
Baseline: Fortran ifl -O3 -QxK -Qipo +FDO
Peak tuning:
168.wupwise:  ifl -O3 -QxK -Qwp_ipo +FDO
171.swim:     ifl -O3 -QxK -Qwp_ipo +FDO
172.mgrid:    ifl -O3 -QxK -Qwp_ipo +FDO
173.applu:    ifl -O3 -QxK -Qwp_ipo -Qscalar_rep- -Qauto +FDO
177.mesa:     icl -O3 -QxK -Qwp_ipo -Oa +FDO shlw32M.lib
178.galgel:   f90 -Optimize:5 -fast
179.art:      icl -O3 -QxK -QaxW -Qwp_ipo -Oa +FDO shlW32M.lib
183.equake:   icl -O3 -QxK -Qwp_ipo -Qrcd -Oa +FDO shlW32M.lib
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 187.facerec:  ifl -O3 -QxK -Qipo +FDO
 188.ammp:     icl -O3 -QxK -Qwp_ipo -Oa +FDO
 189.lucas:    ifl -O3 -QxK -Qwp_ipo +FDO shlW32M.lib
 191.fma3d:    ifl -O3 -QxK -Qwp_ipo +FDO
 200.sixtrack: ifl -QxK -QaxW -Qwp_ipo -Qprefetch +FDO
 301.apsi:     f90 -Optimize:5 -fast
 Library ordering for 189.lucas (to include SmartHeap correctly with default libs):
 LIBS=libIEPCF90.lib libintrins.lib libF90.lib
 libqwind.lib libm.lib shlW32M.lib LIBC.lib libirc.lib OLDNAMES.lib
 ONESTEP is used for all base and peak runs
The tested system can be assembled using an ATX case such as the Antec KS-282,
a 300W power supply such as the Sparkle FSP300-60GT, and a PCI or AGP video card.
The System bus runs at 266MHz
```