CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

IBM Corporation

IBM eServer pSeries 630 Model 6E4 (1200 MHz, 1 CPU)

SPECint2000 = 767

SPECint_base2000 = 745

SPEC license #: 11 | Tested by: IBM, Austin, TX | Test date: Mar-2003 | Hardware Avail: Apr-2003 | Software Avail: Feb-2003

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	252	555	252	555
175.vpr	1400	195	717	195	717
176.gcc	1100	137	800	137	800
181.mcf	1800	155	1164	147	1223
186.crafty	1000	151	662	129	778
197.parser	1800	583	309	588	306
252.eon	1300	137	948	137	948
253.perlbmk	1800	304	592	275	654
254.gap	1100	145	759	145	759
255.vortex	1900	166	1146	166	1147
256.bzip2	1500	189	792	183	819
300.twolf	3000	303	990	299	1004

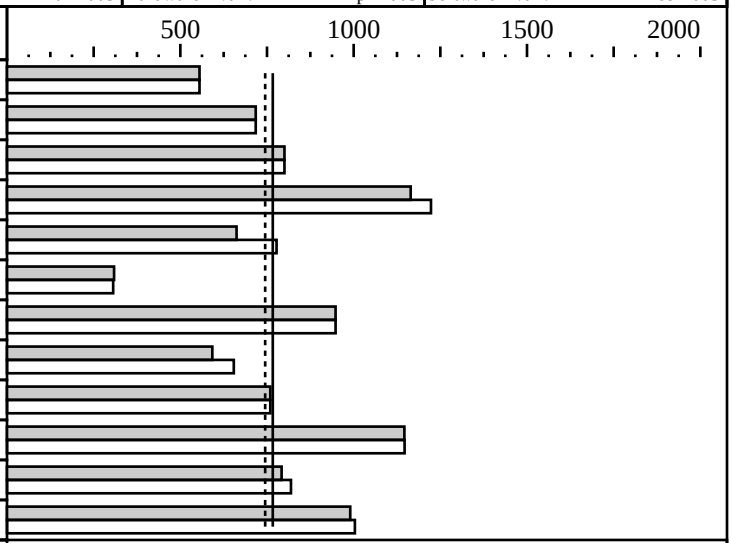

Hardware

CPU:	POWER4+
CPU MHz:	1200
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip, 1 chip/SCM
CPU(s) orderable:	1,2,4 (order by # cores)
Parallel:	No
Primary Cache:	64KBI+32KBD (on chip) per core
Secondary Cache:	1536KB unified (on chip) per chip
L3 Cache:	8MB unified (off-chip) per SCM, 1 SCM in SUT
Other Cache:	None
Memory:	8 GB
Disk Subsystem:	1x36GB SCSI
Other Hardware:	None

Software

Operating System:	AIX 5L V5.2 PTF 2
Compiler:	IBM C for AIX, Version 6.0 IBM VisualAge C++ Professional for AIX, Version 6.0
File System:	AIX/JFS
System State:	Multi-User

Notes/Tuning Information

```
Integer Portability Flags:
  176.gcc:     -ma -DHOST_WORDS_BIG_ENDIAN
  186.crafty:  -DAIX
  252.eon:     -DNEED_EXPLICIT_SPECIALIZATION
               -I. -DNDEBUG
  253.perlbmk: -DSPEC_CPU2000_AIX
  254.gap:     -DSYS_IS_BSD -DSYS_STRING_H -DSYS_HAS_TIME_PROTO
               -DSYS_HAS_MALLOC_PROTO -DSYS_HAS_CALLOC_PROTO
  300.twolf:   -DHAVE_SIGNED_CHAR

Base Optimization Flags:
  C:
  -qpdf1/pdf2
  -O5 -blpdata -qalign=natural
  C++:
  -qpdf1/pdf2
  -O5 -lhmu -qalign=natural

Integer Peak Optimization Flags
164.gzip
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    BASEPEAK = 1
    "CC      = /usr/vac/bin/xlc"
  175.vpr
    BASEPEAK = 1
  176.gcc
    BASEPEAK = 1
  181.mcf
    fdpr -v -R3
    -O5 -blpdata
  186.crafty
    -qpdf1/pdf2
    fdpr -v -R3
    -O3 -q64
  197.parser
    -O5 -blpdata
  252.eon
    BASEPEAK = 1
  253.perlbmk
    -qpdf1/pdf2
    -O5 -lhmu -qalign=natural
  254.gap
    BASEPEAK = 1
  255.vortex
    -qpdf1/pdf2
    -O5 -lhmu -qalign=natural
  256.bzip2
    -qpdf1/pdf2
    -O5 -blpdata -qarch=pwr3 -qtune=pwr3
  300.twolf
    -qpdf1/pdf2
    -O5 -lhmu -qalign=natural -blpdata
    "CC      = /usr/vac/bin/xlc"

    SCM: Acronym for "Single-Chip Module"
    SUT: Acronym for "System Under Test"

    1 processor was deconfigured through the configuration menu.
    The 1-way pSeries 630 machine contains 1 CPU board.

    fpdr: Feedback directed program restructuring tool
    /usr/spec2000 filesystem mounted with no JFS log file I/O.
    APAR IY 38292 was applied to AIX to enable new hardware support.
    ulimits set to unlimited.
    C: IBM VAC++ invoked as cc except where noted as xlc
    C++: IBM VAC++ invoked as xlC
    Large page mode and memory affinity were set as follows:
      vmo -r -o lgpg_regions=32 -o lgpg_size=16777216 -o memory_affinity=1
      chuser capabilities=CAP_BYPASS_RAC_VMM,CAP_PROPAGATE $USER
      shutdown -r
      export MEMORY_AFFINITY=MCM
```