CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire 6800

SPECint_rate2000 = 122

SPECint_rate_base2000 = 107

SPEC license #: 6 | Tested by: Sun Microsystems | Test date: Apr-2003 | Hardware Avail: Mar-2003 | Software Avail: May-2003

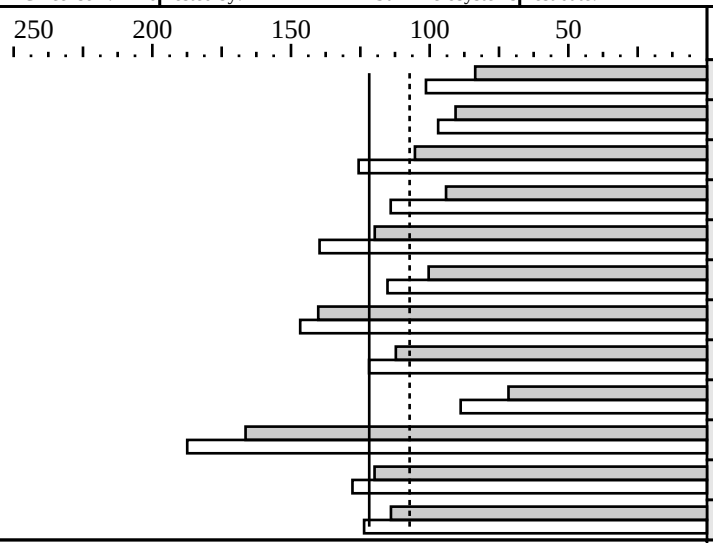

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	16	311	83.6	16	256	101
175.vpr	16	287	90.7	16	268	96.9
176.gcc	16	194	105	16	163	126
181.mcf	16	355	94.1	16	293	114
186.crafty	16	155	120	16	133	140
197.parser	16	333	100	16	290	115
252.eon	16	172	140	16	164	147
253.perlbmk	16	298	112	16	274	122
254.gap	16	285	71.6	16	230	88.8
255.vortex	16	212	166	16	188	187
256.bzip2	16	232	120	16	218	128
300.twolf	16	489	114	16	450	124

Hardware

CPU:	UltraSPARC III Cu
CPU MHz:	1200
FPU:	Integrated
CPU(s) enabled:	16 cores, 16 chips, 1 core/chip
CPU(s) orderable:	4-24
Parallel:	No
Primary Cache:	32KBI+64KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	None
Other Cache:	None
Memory:	32GB 16-way interleaved
Disk Subsystem:	2 x 36GB 4 x (Sun StorEdge T3, 9x18GB raid5) 4-way striped
Other Hardware:	None

Software

Operating System:	Solaris 9 12/02
Compiler:	Sun ONE Studio 8 (pre-FCS build 3/9) Sun Performance Library 8 (pre-FCS build 3/9)
File System:	ufs with ufs logging
System State:	Multi-User

Notes/Tuning Information

```
Compiler invocation:
  C: cc
  CXX: CC

Integer base flags:
     -fast -xipo=2 with ONESTEP=yes and feedback

Integer peak flags:
 ONESTEP=yes and feedback for all benchmarks

 164.gzip:    -xO4  -xbuiltin=%all -xtarget=native -xalias_level=std
              -xipo=2 -Wc,-Qeps:enabled=1,-Qeps:rp_filtering_margin=100
 175.vpr:     -fast -xalias_level=std -xipo=2
              -Wc,-Qeps:enabled=1,-Qeps:rp_filtering_margin=100 -lmopt -lm
 176.gcc:     -fast -xipo=2 -ll2amm
 181.mcf:     -fast -xipo=2 -xprefetch_level=3 -Wc,-Qeps:enabled=1
 186.crafty:  -fast -xinline= -xipo=2 -xalias_level=strong -W2,-Ashort_ldst
              Feedback adds -xlinkopt in PASS2
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 197.parser:  -fast -xipo=2 -xalias_level=strong
              -Wc,-Qgsched-T6,-Qipa:valueprediction
 252.eon:     -fast -xipo=2 -xalias_level=compatible -noex
              -Qoption cg -Qeps:enabled=1,-Qeps:ws=32
 253.perlbmk: -xO5 -xtarget=native -xipo -xalias_level=std -xsafe=mem
              -Wc,-Qeps:enabled=1,-Qeps:ws=8,-Qiselect-sw_pf_tbl_th=20,
              -Qiselect-funcalign=32,-Qicache-chbab=1
 254.gap:     -fast -xipo=2 -xalias_level=strong -xvector
              -xprefetch_level=3 -W2,-Abcopy
 255.vortex:  -fast -xrestrict -xipo=2
              -W2,-crit,-Ainline:recursion=1:cs=500:irs=6000
              -Wc,-Qeps:enabled=1,-Qdepgraph-early_cross_call=1,
              -Qiselect-funcalign=32,-Qpeep-Sh0 -ll2amm
 256.bzip2:   -fast -xipo -xalias_level=strong -xrestrict
              -Wc,-Qeps:enabled=1
 300.twolf:   -fast -xalias_level=strong -xsafe=mem -xipo=2
              -xprefetch=no%auto -Wc,-Qms_pipe+intdivusefp

Feedback is done as follows, unless otherwise noted:
 fdo_pre0:  rm -rf ./feedback.profile ./SunWS_cache
 PASS1:     -xprofile=collect:./feedback
 PASS2:     -xprofile=use:./feedback

Portability:
 176.gcc:     -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
 186.crafty:  -DSUN
 252.eon:     -library=iostream
 253.perlbmk: -DSPEC_CPU2000_SOLARIS
 254.gap:     -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
              -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_IOCTL_PROTO

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"
  MPSSHEAP=4M
  MPSSSTACK=4M
  LD_PRELOAD=mpss.so.1

Kernel Parameters (/etc/system):
  autoup=900
  tune_t_fsflushr=1

Processes were bound to CPUs using submit=pbind

The benchmark was run on the Sun StorEdge T3 disk resident
file system.
```