CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire 4800

SPECfp_rate2000 = 122

SPECfp_rate_base2000 = 98.1

SPEC license #: 6 | Tested by: Sun Microsystems | Test date: Apr-2003 | Hardware Avail: Mar-2003 | Software Avail: May-2003

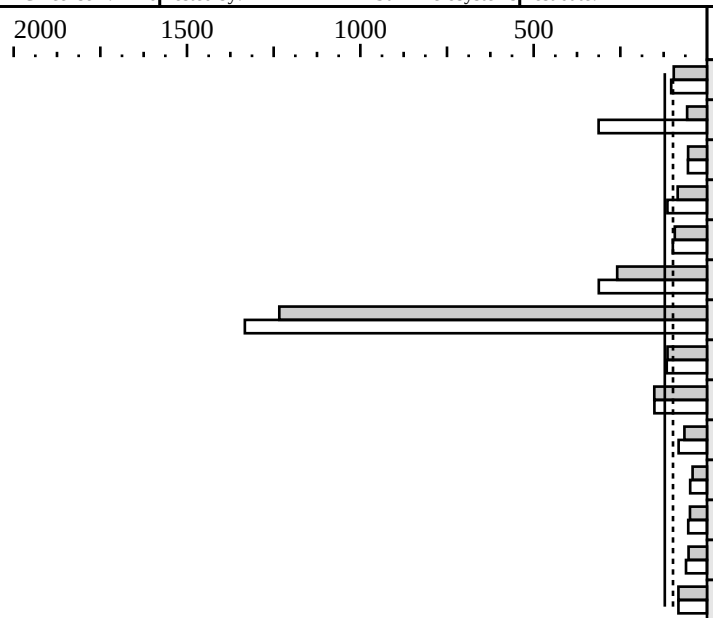

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	12	232	95.9	12	216	103
171.swim	12	753	57.3	12	138	313
172.mgrid	12	460	54.5	12	456	54.9
173.applu	12	346	84.6	12	256	114
177.mesa	12	210	92.9	12	198	98.6
178.galgel	12	156	259	12	129	312
179.art	12	29.3	1234	12	27.1	1333
183.equake	12	159	114	12	156	116
187.facerec	12	174	152	12	174	152
188.ammp	12	470	65.1	12	374	81.9
189.lucas	12	670	41.6	12	574	48.5
191.fma3d	12	595	49.1	12	540	54.1
200.sixtrack	12	288	53.2	12	253	60.5
301.apsi	12	439	82.4	12	439	82.4

Hardware

CPU:	UltraSPARC III Cu
CPU MHz:	1200
FPU:	Integrated
CPU(s) enabled:	12 cores, 12 chips, 1 core/chip
CPU(s) orderable:	4-12
Parallel:	No
Primary Cache:	32KBI+64KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	None
Other Cache:	None
Memory:	24GB 16-way interleaved
Disk Subsystem:	2 x 36GB 4 x (Sun StorEdge T3, 9x18GB raid5) 4-way striped
Other Hardware:	None

Software

Operating System:	Solaris 9 12/02
Compiler:	Sun ONE Studio 8 (pre-FCS build 3/9) Sun Performance Library 8 (pre-FCS build 3/9)
File System:	ufs with ufs logging
System State:	Multi-User

Notes/Tuning Information

```
Compiler invocation:
  C: cc
  CXX: CC
  F90: f90
  F77: f90

Floating point base flags:
    C:  -fast -xipo=2 -xalias_level=std with ONESTEP=yes and feedback
  F90:  -fast -xipo=2 with ONESTEP=yes and feedback

Floating point peak flags:
 ONESTEP=yes and feedback for all benchmarks, unless otherwise noted

 168.wupwise: -fast -xipo=2 -Qoption iropt -Ainline:inc=800:cp=1
 171.swim:    -fast -xpad=common:3969 -xpagesize=64K -xprefetch=latx:1.6
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                -Qoption iropt -Atile:skewp,-Ainline:cs=700
                (no feedback)
 172.mgrid:     -fast -xipo=2
 173.applu:     -fast -xipo=2
                -Qoption cg -Qlp=1-av=192-fa=1,-Qms_pipe+prefolim=7
                -Qoption iropt -Aujam:inner=g
 177.mesa:      -fast -xipo=2 -xalias_level=strong -xrestrict
                -Wc,-Qms_pipe+unoovf
 178.galgel:    -fast -xipo=2 -Qoption iropt -Addint:sf=9 -xlic_lib=sunperf
                RM_SOURCES=lapak.f90
 179.art:       -fast -xipo=2 -xalias_level=std
                -Wc,-Qms_pipe-prefst,-Qms_pipe+prefolim=11
 183.equake:    -fast -xipo=2 -xalias_level=strong -xprefetch_level=2
 187.facerec:   -fast -xipo=2
 188.ammp:      -fast -xipo=2 -xalias_level=std -xpagesize=512K -lmopt -lm
 189.lucas:     -fast -xipo=2 -xprefetch_level=3 -Qoption iropt -Apf:pdl=1
                -Qoption f90comp -array_pad_rows,1977
 191.fma3d:     -fast -xipo=2 -stackvar -xprefetch_level=3
                -Qoption iropt -Apf:pdl=1
 200.sixtrack:-O -dalign -xchip=ultra3 -xarch=v8plusb -fsimple=2
 301.apsi:      -fast -xipo=2

Feedback is done as follows, unless otherwise noted:
 fdo_pre0:  rm -rf ./feedback.profile ./SunWS_cache
 PASS1:     -xprofile=collect:./feedback
 PASS2:     -xprofile=use:./feedback

Portability:
 178.galgel:  -e -fixed

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"
  MPSSHEAP=4M
  MPSSSTACK=4M
  LD_PRELOAD=mpss.so.1

Kernel Parameters (/etc/system):
  autoup=900
  tune_t_fsflushr=1

Processes were bound to CPUs using submit=pbind

The benchmark was run on the Sun StorEdge T3 disk resident
file system.
```