# CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

## Intel Corporation

Intel D875PBZ motherboard (AA-301) (3.0E GHz, Pentium 4 Processor with Hyper-Threading Technology)

SPECint2000 = 1345

SPECint_base2000 = 1292

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Jan-2004 | Hardware Avail: Feb-2004 | Software Avail: Dec-2003

| Benchmark | Reference Time | Base Runtime | Base Ratio | Runtime | Ratio |
|---|---|---|---|---|---|
| 164.gzip | 1400 | 140 | 999 | 140 | 999 |
| 175.vpr | 1400 | 155 | 902 | 156 | 900 |
| 176.gcc | 1100 | 67.5 | 1629 | 67.5 | 1630 |
| 181.mcf | 1800 | 149 | 1212 | 149 | 1211 |
| 186.crafty | 1000 | 90.0 | 1112 | 90.0 | 1111 |
| 197.parser | 1800 | 153 | 1176 | 153 | 1176 |
| 252.eon | 1300 | 88.7 | 1466 | 74.4 | 1746 |
| 253.perlbmk | 1800 | 127 | 1412 | 114 | 1581 |
| 254.gap | 1100 | 68.0 | 1617 | 68.1 | 1615 |
| 255.vortex | 1900 | 81.9 | 2321 | 81.9 | 2321 |
| 256.bzip2 | 1500 | 154 | 973 | 150 | 997 |
| 300.twolf | 3000 | 245 | 1227 | 205 | 1466 |

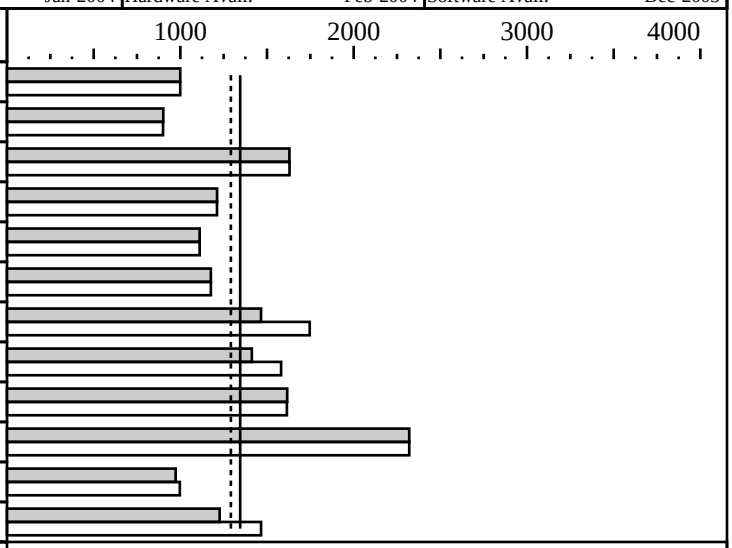


### Hardware

| | |
|---|---|
| CPU: | Intel Pentium 4 Processor with Hyper-Threading Technology(3.0E GHz, 800 MHz bus) |
| CPU MHz: | 3000 |
| FPU: | Integrated |
| CPU(s) enabled: | 1 core, 1 chip, 1 core/chip (Hyper-Threading Technology enabled) |
| CPU(s) orderable: | 1 |
| Parallel: | No |
| Primary Cache: | 12k micro-ops I + 16KBD on chip |
| Secondary Cache: | 1MB(I+D) on chip |
| L3 Cache: | N/A |
| Other Cache: | N/A |
| Memory: | 1 GB(2 512MB PC3200 Samsung Double-sided CL3-3-3 DIMMs) |
| Disk Subsystem: | Seagate ST3160023AS 160 GB Serial ATA (7200 RPM, 8MB cache) |
| Other Hardware: | None |

### Software

| | |
|---|---|
| Operating System: | Windows XP Professional Service Pack 1a |
| Compiler: | Intel C++ Compiler 8.0 Build 20031017Z<br>Microsoft Visual Studio .Net 7.0(for libraries)<br>MicroQuill SmartHeap library V6.0 |
| File System: | NTFS |
| System State: | Default |

## Notes/Tuning Information

```
ONESTEP=yes for all base and peak runs    +FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use (Qxp not used in PASS1)
Base tuning for C programs:   -QxP -fast -Qansi_alias +FDO
Base tuning for C++ programs: -QxP -fast -GX -GR
Portability flags:
176.gcc: -Dalloca=_alloca /F10000000
186.crafy: -DNT_i386
253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
164.gzip:     -QxP -fast -Qansi_alias -Oa  +FDO
175.vpr:      -QxP -fast -Qansi_alias +FDO
176.gcc:      -QxP -fast -Qansi_alias +FDO
181.mcf:      -QxP -fast -Qansi_alias +FDO
186.crafty:   -QxP -fast -Qansi_alias -Oa +FDO
197.parser:   -QxP -fast -Qansi_alias  +FDO
252.eon:      -QxP -O2 -Qipo +FDO
253.perlbmk:  -QxP -fast -Qansi_alias +FDO shlW32M.lib
254.gap:      -QxP -fast -Qunroll1 -Zp8 +FDO
255.vortex    basepeak=yes
256.bzip2:    -fast -Oa -Qunroll1 +FDO
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation



## Notes/Tuning Information (Continued)

300.twolf: -QxP -fast -O3 +FDO shlW32M.lib
Tested systems can be used with Shin-G ATX case, Delta Inc. power supply PS-300GB-1
Product description located as of 9/2003:
http://developer.intel.com/design/motherbd/bz/index.htm
Motherboard is available through Intel OEM Distribution Channel. See
http://www.intel.com/cd/channel/reseller/asmo-na/eng/products/box_desktop_boards/p4_boards/p4_dsk_board_d875pbz/index.htm
The system bus runs at 800 MHz
shlW32M.lib is the SmartHeap library V6.0 from http://www.microquill.com/smartheap/index.html
An AGP video card is installed and Hyper-Threading Technologyis enabled