CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire E6900 (24 processor)

SPECint_rate2000 = 492

SPECint_rate_base2000 = 414

SPEC license #: 6 | Tested by: Sun Microsystems | Test date: Oct-2005 | Hardware Avail: Oct-2005 | Software Avail: Nov-2005

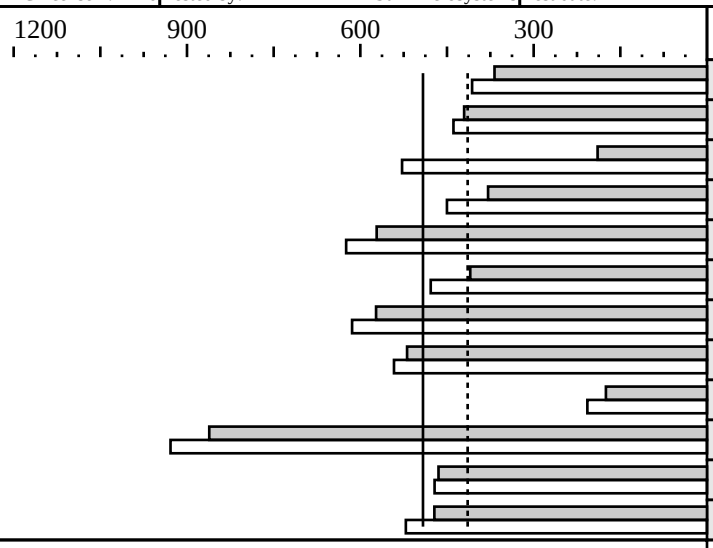

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	48	212	368	48	192	407
175.vpr	48	185	420	48	178	439
176.gcc	48	323	189	96	232	528
181.mcf	48	265	379	96	445	450
186.crafty	48	97.4	572	48	89.2	625
197.parser	48	245	410	48	210	478
252.eon	48	126	573	48	118	614
253.perlbmk	48	193	519	48	185	542
254.gap	48	350	175	96	592	207
255.vortex	48	123	861	48	114	929
256.bzip2	48	180	465	48	177	472
300.twolf	48	354	472	48	320	521

Hardware

CPU:	UltraSPARC IV+
CPU MHz:	1500
FPU:	Integrated
CPU(s) enabled:	48 cores, 24 chips, 2 cores/chip
CPU(s) orderable:	4, 8, 12, 16, 20, 24 (order by number of chips)
Parallel:	No
Primary Cache:	64KBI+64KBD per core on chip (128KBI+128KBD on chip)
Secondary Cache:	2MB(I+D) per chip (on chip)
L3 Cache:	32MB(I+D) per chip (off chip)
Other Cache:	None
Memory:	96GB 16-way interleaved
Disk Subsystem:	Sun StorEdge D240 Media Tray (2x73GB) Sun StorEdge 6120 Array (14x73GB)
Other Hardware:	None

Software

Operating System:	Solaris 10
Compiler:	Sun Studio 11
File System:	ufs (default ufs logging on with Solaris 10)
System State:	Multi-User

Notes/Tuning Information

```
Compiler invocation:
    C: cc
  CXX: CC

Integer base flags:
  -fast -xipo=2 with ONESTEP=yes and feedback

Integer peak flags:
  ONESTEP=yes for all benchmarks
  Profile feedback used for those marked with +FDO

  164.gzip:   -x04 -xbuiltin=%all -xtarget=native -xalias_level=std
              -xipo=2 -Wc,-Qeps:enabled=1,-Qeps:rp+filtering_margin=30,
              -Qeps:do_spec_load=1 +FDO
  175.vpr:    -fast -Wc,-Qeps:enabled=1,-Qeps:do_spec_load=1,
              -Qeps:rp_filtering_margin=30 -xipo=2 -xpagesize_stack=8K
              -lmopt -lm +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
  176.gcc:    -fast -xipo=2 -Wc,-Qicache-chbab=1 -Wc,-Qeps:enabled=1
              -Qeps:ws=32 -Wc,-Qdepgraph-early_cross_call=1
              -Wc,-Qms_pipe-pref_prolog -ll2amm +FDO
  181.mcf:    -fast -xipo=2 -xprefetch_level=2
  186.crafty: -fast -xpagesize=8k -xipo=2 -xalias_level=strong
              -W2,-Ashort_ldst -xinline= -xprefetch -xrestrict
              +FDO (-xlinkopt during pass2)
  197.parser: -fast -xipo=2 -xalias_level=strong -Wc,Qgsched-T6
              -Wc,-Qipa:valuepredicition -Wc,-Qms_pipe-prefstrong=0,
              -Qlp-pt=weak +FDO
  252.eon:    -fast -xipo=2 -xalias_level=compatible -Qoption cg
              -Qeps:enabled=1 -xvector -Qoption iropt -Abcopy -xunroll=16
              +FDO
  253.perlbmk:-fast -xipo -Wc,-Qeps:enabled=1,-Qeps:ws=16 -xalias_level=std
              -xsafe=mem -Wc,-Qiselect-funcalign=128,-Qicache-chbab=1
              -Wc,-Qiselect-sw_pf_tbl_th=40,-Qeps:do_spec_load=1 +FDO
  254.gap:    -fast -W2,-Abcopy -xvector -xprefetch_level=3 +FDO
  255.vortex: -fast -xrestrict -xipo=2 -Wc,-Qeps:enabled=1
              -W2,-Ainline:recursion=1:cs=400:irs=5000
              -Wc,-Qdepgraph-early_cross_call=1 -Wc,-Qiselect-funcalign=64
              -Wc,-Qpeep-Sh0 -W2,-crit -xprefetch=latx:1.7 -fsimple=1
              -Wc,-Qiselect-sw_pf_tbl_th=30 -Wc,-Qicache-chbab=1
              -W2,-Ainline:inc=300 -ll2amm +FDO
  256.bzip2:  -fast -xipo=2 -xalias_level=strong -xrestrict
              -Wc,-Qeps:enabled=1,-Qeps:do_spec_load=1 +FDO
  300.twolf:  -fast -xalias_level=strong -xsafe=mem -xipo=2
              -xprefetch=no%auto -Wc,-Qms_pipe+intdivusefp -xinline= +FDO

Feedback is done as follows, unless otherwise noted:
  fdo_pre0:    rm -rf ./feedback.profile ./SunWS_cache
  PASS1:       -xprofile=collect:./feedback
  PASS2:       -xprofile=use:./feedback

Portability:
  176.gcc:    -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
  186.crafty: -DSUN
  252.eon:    -DFMAX_IS_DOUBLE -library=iostream
  253.perlbmk:-DSPEC_CPU2000_SOLARIS
  254.gap:    -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
              -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_IOCTL_PROTO

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"
  MPSSHEAP=4M
  MPSSSTACK=4M
  LD_PRELOAD=mpss.so.1

Kernel Parameters (/etc/system):
  autoup=900
  tune_t_fsflushr=1

The system was configured with multiple file systems.  The O/S was
installed on one disk of the Sun StorEdge D240 Media Tray(ufs, ufs
w/logging).  The benchmark was run on the Sun StorEdge 6120 Array,
using H/W Raid 5 and ufs with ufs logging file system.
```