CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX200 S2, Intel Xeon processor 3.20GHz, 2MB L2

SPECint2000 = 1543

SPECint_base2000 = 1543

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Nov-2005 | Hardware Avail: Oct-2005 | Software Avail: Sep-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	131	1067	131	1067
175.vpr	1400	131	1066	131	1066
176.gcc	1100	59.4	1851	59.4	1851
181.mcf	1800	101	1782	101	1782
186.crafty	1000	84.6	1183	84.6	1183
197.parser	1800	136	1320	136	1320
252.eon	1300	68.7	1893	68.7	1893
253.perlbmk	1800	94.9	1896	94.9	1896
254.gap	1100	63.8	1725	63.8	1725
255.vortex	1900	72.8	2611	72.8	2611
256.bzip2	1500	127	1180	127	1180
300.twolf	3000	184	1627	184	1627

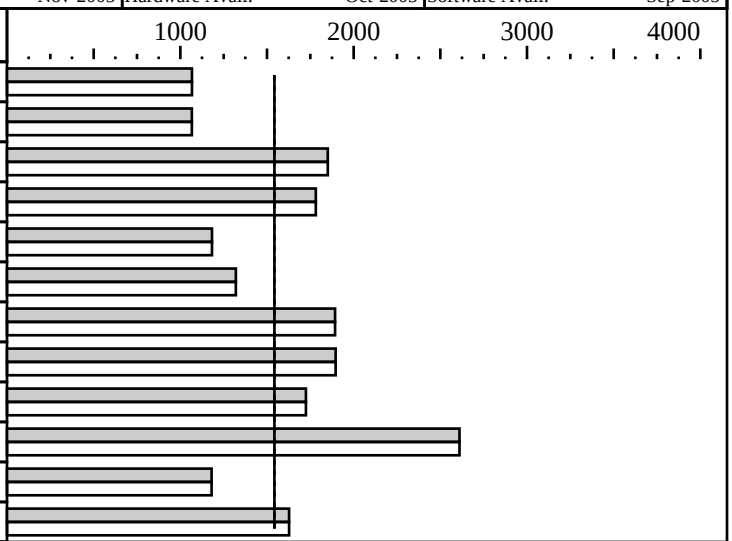

Hardware

CPU:	Intel Xeon processor 3.20GHz, 2MB L2, 800MHz system bus
CPU MHz:	3200
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip (Hyper-Threading Technology disabled)
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	12k micro-ops I + 16KBD on chip, per core
Secondary Cache:	2048KB(I+D) on chip, per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x512 MB DDRII-RAM PC2-3200R
Disk Subsystem:	Seagate ST336753LC(U320 SCSI, 15krpm)
Other Hardware:	none

Software

Operating System:	Windows Server 2003 Enterprise Edition + SP1
Compiler:	Intel C++ Compiler 9.0 Build 20050722Z (for 32-bit applications) Microsoft Visual Studio .Net 2003 7.1.3088 (for libraries) SmartHeap Library Version 7.4 from http://www.microquill.com
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
GENERAL
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use

Portability flags
   176.gcc:     -Dalloca=_alloca /F10000000
   186.crafy:   -DNT_i386
   252.eon:     Approved srcalt stdcpp is used
   253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
   254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO

Base tuning flags
   for C programs:   -fast +FDO shlW32M.lib
   for C++ programs: -fast -Qcxx_features +FDO shlW32M.lib

Peak tuning flags
   same as baseline (basepeak=yes set globally)

New 32-bit Windows tools used, approved in May-2005

The system bus runs at 800 MHz
```

CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX200 S2, Intel Xeon processor 3.20GHz, 2MB L2

SPECint2000 = 1543

SPECint_base2000 = 1543

SPEC license #: 22	Tested by: Fujitsu Siemens Computers	Test date: Nov-2005	Hardware Avail: Oct-2005	Software Avail: Sep-2005

Notes/Tuning Information (Continued)

This result was measured with 32-bit binaries using the 32-bit version of the operating system.

For information about Fujitsu Siemens Computers in your country please see: http://www.fujitsu-siemens.com/countries