CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

IBM

IBM eServer 326m, 2.0 GHz Dual Core AMD Opteron(tm) Processor 270

SPECfp2000 = 1785

SPECfp_base2000 = 1598

SPEC license #: 11 | Tested by: IBM Corporation | Test date: Nov-2005 | Hardware Avail: Nov-2005 | Software Avail: Nov-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	72.4	2209	66.2	2416
171.swim	3100	137	2256	129	2406
172.mgrid	1800	136	1321	113	1591
173.applu	2100	124	1693	111	1886
177.mesa	1400	86.1	1626	81.3	1723
178.galgel	2900	110	2627	97.5	2973
179.art	2600	114	2283	85.0	3059
183.equake	1300	91.3	1424	83.2	1563
187.facerec	1900	91.2	2084	87.1	2182
188.ammp	2200	191	1152	170	1292
189.lucas	2000	110	1825	98.7	2026
191.fma3d	2100	164	1278	157	1338
200.sixtrack	1100	188	585	156	705
301.apsi	2600	186	1397	180	1444

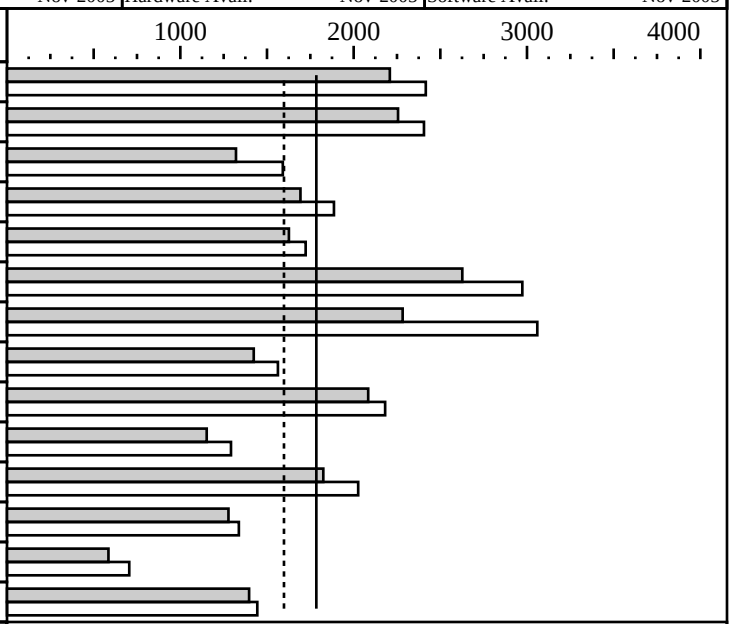

Hardware

CPU:	AMD Opteron(tm) Processor 270
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB (I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8 x 1024GB PC3200
Disk Subsystem:	SCSI, 36GB 15K RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux 9.0 SP2 SLES 64 bit Kernel 2.6.5-7.191-smp (SP2)
Compiler:	PathScale EKO Compiler Suite, Release 2.2.1 AMD Core Math Library 2.5.1
File System:	Linux/reiserfs
System State:	Multi-user, run level 3

Notes/Tuning Information

```
Tested by IBM Corporation
 +ACML: Linked with AMD Core Math Library
 Base tuning for C programs: -Ofast -WOPT:mem_opnds=on +FDO
 Base tuning for FORTRAN programs: -Ofast -LNO:fusion=2 -OPT:fast_complex +FDO
 Portability flags:
   178.galgel:    -fixedform
 Peak tuning:
   168.wupwise:   -Ofast -LNO:prefetch_ahead=5:prefetch=3
                  -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3
                  -IPA:linear=on:plimit=50000:callee_limit=5000
                  -INLINE:aggressive=on
   171.swim:      -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 -m3dnow
   172.mgrid:     -Ofast -CG:gcm=off:cflow=on -OPT:IEEE_a=3:unroll_size=200
                  -LNO:fusion=2:fission=1:blocking=off:prefetch_ahead=2
      -WOPT:memopnds=on:aggstr=0
   173.applu:     -Ofast -CG:local_fwd_sched=on -OPT:ro=3 -TENV:X=3
                  -LNO:fusion=2:fission=2:full_unroll_size=10000:prefetch=3 +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
   177.mesa:      -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on -WOPT:mem_opnds=on +FDO
    178.galgel:    -Ofast -OPT:fast_complex +ACML +FDO
    179.art:       -O3 -OPT:ofast -fno-math-errno -mno-sse2 -m32
    183.equake:    -Ofast -CG:load_exe=2 -WOPT:mem_opnds=on -m32 +FDO
    187.facerec:   -Ofast -LNO:fusion=2
                   -OPT:fast_complex=on:IEEE_NaN_Inf=off:unroll_size=0 +FDO
    188.ammp:      -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
                   -fno-math-errno -TENV:X=4 -LNO:prefetch=0 +FDO
    189.lucas:     -Ofast -OPT:ro=3:fast_nint=off:unroll_size=256 -WOPT:memopnds=on +FDO
    191.fma3d:     -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
                   -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
    200.sixtrack:  -O3 -OPT:Ofast:Olimit=60000:early_intrinsics=on
       -fno-math-errno -CG:load_exe=1 +FDO
    301.apsi:      -Ofast -CG:load_exe=0 -LNO:prefetch=0:simd=2
  BIOS Configuration Notes
    Node Interleaving is Disabled
  Other Configuration Notes
     Taskset utility used to bind process to CPU(s)
```