CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX220, AMD Opteron (TM) 252

SPECfp2000 = 2182

SPECfp_base2000 = 1991

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Jan-2006 | Hardware Avail: Dec-2005 | Software Avail: Sep-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	56.6	2825	51.2	3124
171.swim	3100	119	2596	116	2680
172.mgrid	1800	103	1749	93.4	1927
173.applu	2100	102	2066	89.7	2340
177.mesa	1400	67.4	2078	63.8	2193
178.galgel	2900	88.7	3269	79.4	3654
179.art	2600	96.1	2706	71.5	3638
183.equake	1300	76.6	1698	69.5	1871
187.facerec	1900	76.2	2495	72.6	2618
188.ammp	2200	142	1552	134	1647
189.lucas	2000	98.2	2037	85.8	2332
191.fma3d	2100	127	1655	127	1655
200.sixtrack	1100	127	863	121	907
301.apsi	2600	158	1649	146	1780

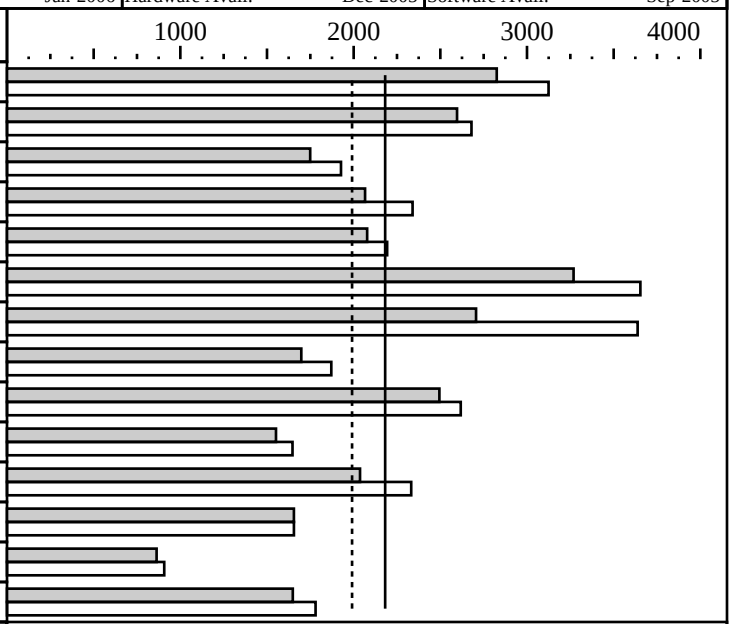

Hardware

CPU:	AMD Opteron (TM) 252 processor (2.60 GHz)
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB (I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2048MB DDR-RAM PC3200R CL3-3-3
Disk Subsystem:	Western Digital WD2500 (SATA, 7.2krpm)
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 9 (x86_64) SP 2 SuSE Kernel 2.6.5-7.191-smp
Compiler:	PathScale EKOPath(TM) Compiler Suite, Release 2.2.1 (for C and Fortran) AMD Core Mathematical Library (ACML), Version 2.6.0
File System:	Linux/reiserfs
System State:	Multi-user run level 3

Notes/Tuning Information

```
GENERAL
+FDO:  PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata
+ACML: Linked with AMD Core Math Library

Portability flags
   178.galgel: -fixedform

Base tuning flags
   for Fortran programs: -Ofast -LNO:fusion=2 -OPT:fast_complex=on +FDO
   for C programs:       -Ofast -WOPT:mem_opnds=on +FDO

Peak tuning flags
   168.wupwise:  -Ofast -LNO:prefetch_ahead=5:prefetch=3
                 -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3
                -IPA:linear=on:plimit=50000:callee_limit=5000 -INLINE:aggressive=on
   171.swim:     -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 -m3dnow
   172.mgrid:    -Ofast -CG:gcm=off -OPT:IEEE_a=3:unroll_size=200
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                -LNO:fusion=2:fission=1:blocking=off:prefetch_ahead=2
                -WOPT:mem_opnds=on:aggstr=0
   173.applu:   -Ofast -CG:local_fwd_sched=on -OPT:ro=3 -TENV:X=3
                -LNO:fusion=2:fission=2:full_unroll_size=10000 +FDO
   177.mesa:    -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on
                -WOPT:mem_opnds=on +FDO
   178.galgel:  -Ofast -OPT:fast_complex=on +ACML +FDO
   179.art:     -O3 -OPT:Ofast -fno-math-errno -mno-sse2 -m32
   183.equake:  -Ofast -CG:load_exe=2 -WOPT:mem_opnds=on -m32 +FDO
   187.facerec: -Ofast -LNO:fusion=2
                -OPT:fast_complex=on:IEEE_NaN_Inf=off:unroll_size=0 +FDO
   188.ammp:    -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
                -fno-math-errno -TENV:X=4 +FDO
   189.lucas:   -Ofast -OPT:ro=3:fast_nint=off:unroll_size=256
                -WOPT:mem_opnds=on +FDO
   191.fma3d:   -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
                -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
   200.sixtrack: -O3 -OPT:Ofast:Olimit=6000:early_intrinsics=on
                -fno-math-errno -CG:load_exe=1 +FDO
   301.apsi:    -Ofast -CG:load_exe=0 -LNO:prefetch=0:simd=2


BIOS settings: Memory timing=1T

This result was measured with 64-bit binaries using the 64-bit version of
the operating system.

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries
```