CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL25p (AMD Opteron (TM) 285)

SPECint2000 = 1754

SPECint_base2000 = 1666

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Feb-2006 | Hardware Avail: Mar-2006 | Software Avail: Nov-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	99.5	1407	99.5	1407
175.vpr	1400	104	1344	101	1386
176.gcc	1100	58.7	1874	58.4	1884
181.mcf	1800	166	1084	139	1297
186.crafty	1000	60.1	1664	54.3	1841
197.parser	1800	114	1581	114	1582
252.eon	1300	50.8	2561	46.2	2817
253.perlbmk	1800	104	1726	104	1726
254.gap	1100	61.9	1778	61.9	1778
255.vortex	1900	74.3	2558	74.5	2552
256.bzip2	1500	113	1327	112	1344
300.twolf	3000	177	1693	146	2057

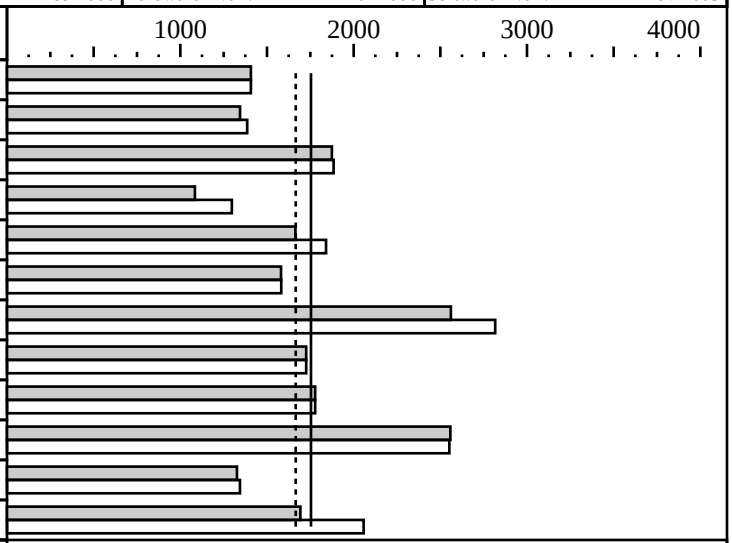

Hardware

CPU:	AMD Opteron (TM) 285
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB(I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2048MB PC3200 CL3.0
Disk Subsystem:	1x36.4GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler 8.0 Build 20040318Z Microsoft Visual Studio .NET 7.0.9466 (for libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -fast -arch:SSE2 -Oi- +FDO ONESTEP=yes
Base tuning for C++ programs: -fast -GX -GR +FDO ONESTEP=yes
Portability flags:
  176.gcc: -Dalloca=_alloca /F10000000
  186.crafty: -DNT_i386
  253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
  164.gzip:       basepeak=yes
  175.vpr:       -fast -arch:SSE2 -Qoption,c,-ip_ninl_max_stats=2000
                  -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO ONESTEP=yes
  176.gcc:       -fast -arch:SSE2 -Oi- -Qunroll3 +FDO
  181.mcf:       -fast -QaxN +FDO ONESTEP=yes
  186.crafty:     -fast -arch:SSE2 +FDO ONESTEP=yes
  197.parser:     -arch:SSE2 -Oi- -Qipo +FDO ONESTEP=yes
  252.eon:      -fast -arch:SSE2 -Qansi_alias -Qoption,c,-ip_ninl_max_stats=2000
                  -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO ONESTEP=yes
  253.perlbmk:    basepeak=yes
  254.gap:      basepeak=yes
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    255.vortex:     -fast -arch:SSE2 -Oi- -Qoption,c,-ip_ninl_max_stats=2000
                   -Qoption,c,-ip_ninl_max_total_stats=4500 +FDO shlw32M.lib ONESTEP=yes
    256.bzip2:      -fast -Qunroll2
    300.twolf:      -fast -arch:SSE2 -Qansi_alias +FDO shlw32M.lib ONESTEP=yes
  BIOS Configuration Notes
    Node Interleaving Disabled
  Other Configuration Notes
    /NUMPROC=1 flag was added to boot.ini to invoke uniprocessor environment.
```