CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL145 G2 (AMD Opteron (TM) 285)

SPECfp_rate2000 = 25.4

SPECfp_rate_base2000 = 23.1

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Feb-2006 | Hardware Avail: Mar-2006 | Software Avail: Feb-2006

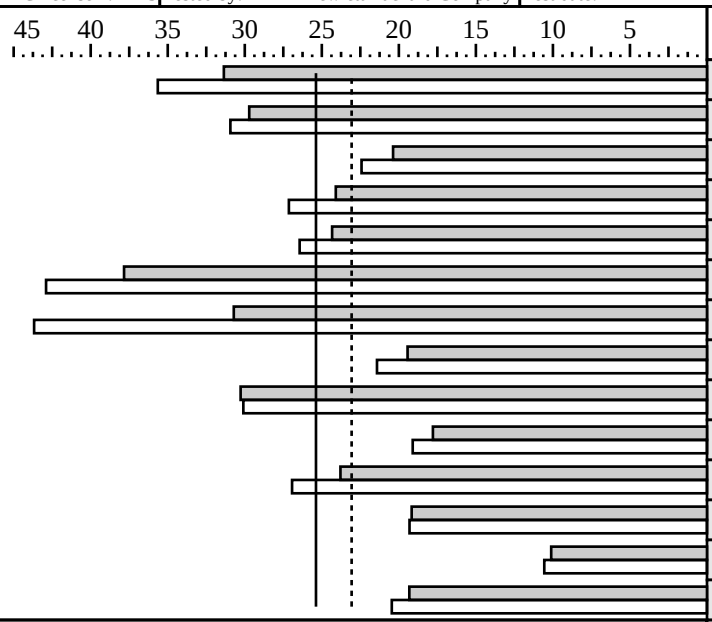

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	1	59.2	31.4	1	52.1	35.6
171.swim	1	121	29.7	1	116	30.9
172.mgrid	1	102	20.4	1	93.1	22.4
173.applu	1	101	24.1	1	89.8	27.1
177.mesa	1	66.7	24.3	1	61.4	26.4
178.galgel	1	88.9	37.8	1	78.4	42.9
179.art	1	98.2	30.7	1	69.1	43.7
183.equake	1	77.6	19.4	1	70.4	21.4
187.facerec	1	72.8	30.3	1	73.2	30.1
188.ammp	1	143	17.8	1	134	19.1
189.lucas	1	97.5	23.8	1	86.1	26.9
191.fma3d	1	127	19.2	1	126	19.3
200.sixtrack	1	126	10.1	1	121	10.6
301.apsi	1	156	19.3	1	147	20.5

Hardware

CPU:	AMD Opteron (TM) 285
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB(I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2048MB PC3200 CL3.0
Disk Subsystem:	1x36.4GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	SuSE Linux Enterprise Server 9 (x86_64) SP 3 SuSE kernel 2.6.5-7.244-default
Compiler:	PathScale EKOPath(TM) Compiler Suite, Release 2.3 AMD Core Math Library 3.0.0
File System:	Linux/ext2
System State:	Multi-user run level 3

Notes/Tuning Information

```
+FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata
+ACML: Linked with AMD Core Math Library
Base tuning for C programs: -Ofast -WOPT:mem_opnds=on +FDO
Base tuning for FORTRAN programs: -Ofast -LNO:fusion=2 -OPT:fast_complex=on +FDO
Portability flags:
  178.galgel:    -fixedform
Peak tuning:
  168.wupwise:   -Ofast -LNO:prefetch_ahead=5:prefetch=3
                 -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3
                -IPA:linear=on:plimit=50000:callee_limit=5000 -INLINE:aggressive=on
  171.swim:      -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 -m3dnow
  172.mgrid:     -Ofast -CG:gcm=off -OPT:IEEE_a=3:unroll_size=200
               -LNO:fusion=2:fission=1:blocking=off:prefetch_ahead=2 -WOPT:mem_opnds=on:aggstr=0
  173.applu:     -Ofast -CG:local_fwd_sched=on -OPT:ro=3 -TENV:X=3
                 -LNO:fusion=2:fission=2:full_unroll_size=10000 +FDO
  177.mesa:      -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on
                  -WOPT:mem_opnds=on +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
   178.galgel:    -Ofast -OPT:fast_complex-on RM_SOURCES=lapak.f90 +ACML +FDO
   179.art:       -O3 -OPT:Ofast -fno-math-errno -mno-sse2 -m32
   183.equake:    -Ofast -CG:load_exe=2 -WOPT:mem_opnds=on -m32 +FDO
  187.facerec:   -Ofast -LNO:fusion=2 -OPT:fast_complex=on:IEEE_NaN_Inf=off:unroll_size=0 +FDO
   188.ammp:      -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
                  -fno-math-errno -TENV:X=4 +FDO
   189.lucas:     -Ofast -OPT:ro=3:fast_nint=off:unroll_size=256 -WOPT:mem_opnds=on +FDO
   191.fma3d:     -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
                  -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
   200.sixtrack:  -O3 -OPT:Ofast:Olimit=6000:early_intrinsics=on -fno-math-errno
                  -CG:load_exe=1 +FDO
   301.apsi:      -Ofast -CG:load_exe=0 -LNO:prefetch=0:simd=2
BIOS Configuration Notes
  Node Interleaving is Disabled
Other Configuration Notes
   Single-processor kernel was used
```