CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 G4 (3.0GHz, Intel Xeon processor 7041)

SPECint2000 = 1423

SPECint_base2000 = 1416

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: May-2006 | Hardware Avail: May-2006 | Software Avail: May-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	139	1009	139	1008
175.vpr	1400	150	933	146	957
176.gcc	1100	63.2	1741	63.2	1741
181.mcf	1800	124	1455	124	1455
186.crafty	1000	89.0	1123	89.0	1124
197.parser	1800	149	1209	148	1214
252.eon	1300	63.7	2041	63.6	2043
253.perlbmk	1800	104	1732	102	1763
254.gap	1100	70.9	1551	69.8	1577
255.vortex	1900	80.7	2355	80.9	2349
256.bzip2	1500	148	1012	148	1012
300.twolf	3000	195	1536	195	1536

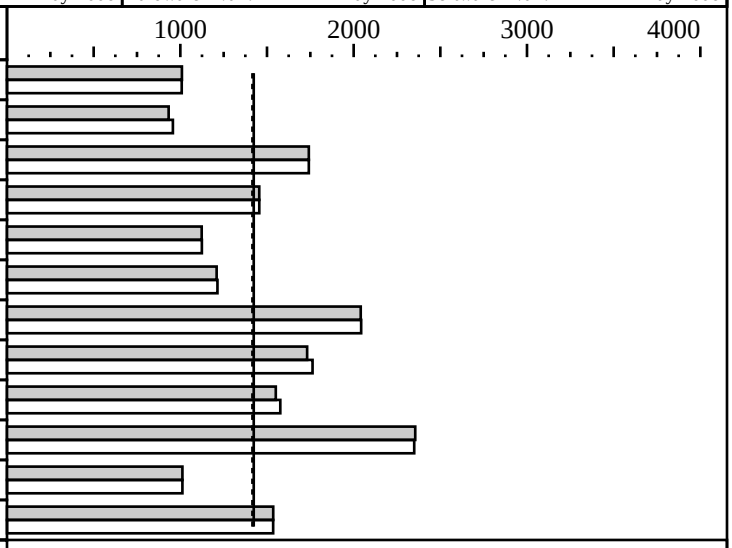

Hardware

CPU:	Intel Xeon processor 7041 (3.0GHz, 2x2MB L2, 800MHz bus)
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip (Hyper-Threading Technology disabled)
CPU(s) orderable:	1,2,4
Parallel:	No
Primary Cache:	12K micro-ops I + 16KBD (on chip) per core
Secondary Cache:	2048KB(I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x2048MB PC2-3200 dual-rank
Disk Subsystem:	1x36GB SAS
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler for 32-bit applications, (Version 9.1 Build 20060323Z) Microsoft Visual Studio .NET 7.0.9466 (for libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use

Base tuning for C programs:   -fast         +FDO  ONESTEP=yes shlw32M.lib
Base tuning for C++ programs: -fast -Qcxx_features +FDO  ONESTEP=yes
Portability flags:
  176.gcc: -Dalloca=_alloca /F10000000
  186.crafty: -DNT_i386
  253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
  164.gzip:     -fast               +FDO  ONESTEP=yes
  175.vpr:      -fast               +FDO  ONESTEP=yes
  176.gcc:      basepeak=1
  181.mcf:      -fast               +FDO  ONESTEP=yes shlw32M.lib
  186.crafty:   -fast -Oa           +FDO  ONESTEP=yes shlw32M.lib
  197.parser:   -fast               +FDO  ONESTEP=yes
  252.eon:      -fast               +FDO
  253.perlbmk:  -fast -Oa           +FDO  ONESTEP=yes shlw32M.lib
  254.gap:      -fast               +FDO  ONESTEP=yes
  255.vortex:   -fast               +FDO  ONESTEP=yes shlw32M.lib
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    256.bzip2:    basepeak=1
    300.twolf:    -fast               +FDO              shlw32M.lib
BIOS Configuration Notes
  Hyper-Threading Technology disabled
Other Configuration Notes
  /NUMPROC=1 flag was added to boot.ini to invoke uniprocessor environment.
```