CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant ML570 G4 (3.0GHz, Intel Xeon processor 7041)

SPECint_rate2000 = 16.6

SPECint_rate_base2000 = 16.5

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: May-2006 | Hardware Avail: May-2006 | Software Avail: May-2006

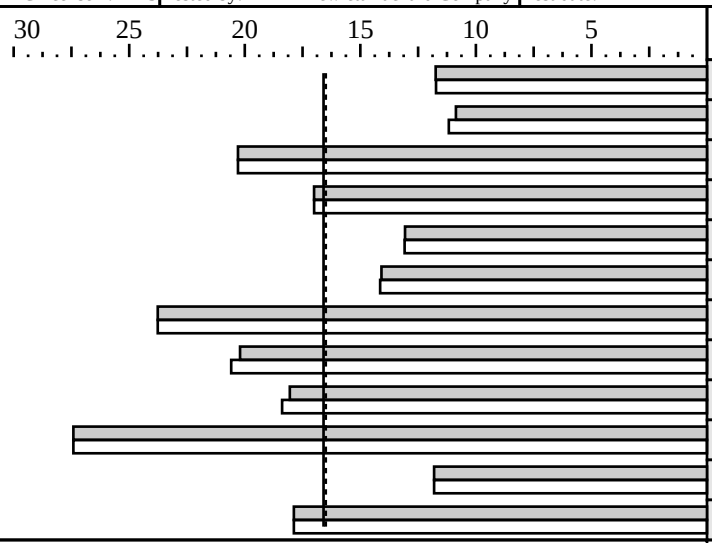

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	1	138	11.7	1	139	11.7
175.vpr	1	149	10.9	1	145	11.2
176.gcc	1	62.9	20.3	1	62.9	20.3
181.mcf	1	123	17.0	1	123	17.0
186.crafty	1	88.8	13.1	1	88.7	13.1
197.parser	1	148	14.1	1	148	14.1
252.eon	1	63.5	23.8	1	63.5	23.8
253.perlbmk	1	103	20.2	1	101	20.6
254.gap	1	70.7	18.1	1	69.4	18.4
255.vortex	1	80.4	27.4	1	80.4	27.4
256.bzip2	1	147	11.8	1	147	11.8
300.twolf	1	195	17.9	1	195	17.9

Hardware

CPU:	Intel Xeon processor 7041 (3.0GHz, 2x2MB L2, 800MHz bus)
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip (Hyper-Threading Technology disabled)
CPU(s) orderable:	1,2,4
Parallel:	No
Primary Cache:	12K micro-ops I + 16KBD (on chip) per core
Secondary Cache:	2048KB(I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	16x2048MB PC2-3200 dual-rank
Disk Subsystem:	1x36GB SAS
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler for 32-bit applications, (Version 9.1 Build 20060323Z) Microsoft Visual Studio .NET 7.0.9466 (for libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use

Base tuning for C programs:   -fast         +FDO  ONESTEP=yes shlw32M.lib
Base tuning for C++ programs: -fast -Qcxx_features +FDO  ONESTEP=yes
Portability flags:
  176.gcc: -Dalloca=_alloca /F10000000
  186.crafty: -DNT_i386
  253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
  164.gzip:     -fast               +FDO  ONESTEP=yes
  175.vpr:      -fast               +FDO  ONESTEP=yes
  176.gcc:      basepeak = 1
  181.mcf:      -fast               +FDO  ONESTEP=yes shlw32M.lib
  186.crafty:   -fast -Oa           +FDO  ONESTEP=yes shlw32M.lib
  197.parser:   -fast               +FDO  ONESTEP=yes
  252.eon:      -fast               +FDO
  253.perlbmk:  -fast -Oa           +FDO  ONESTEP=yes shlw32M.lib
  254.gap:      -fast               +FDO  ONESTEP=yes
  255.vortex:   -fast               +FDO  ONESTEP=yes shlw32M.lib
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    256.bzip2:    basepeak=1
    300.twolf:    -fast               +FDO              shlw32M.lib
  BIOS Configuration Notes
    Hyper-Threading Technology disabled
  Other Configuration Notes
    /NUMPROC=1 flag was added to boot.ini to invoke uniprocessor environment.
```