CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant ML570 G4 (3.0GHz, Intel Xeon processor 7041)

SPECint2000 = 1430

SPECint_base2000 = 1422

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: May-2006 | Hardware Avail: May-2006 | Software Avail: May-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	138	1012	139	1011
175.vpr	1400	149	937	145	963
176.gcc	1100	62.9	1750	62.9	1750
181.mcf	1800	123	1466	123	1465
186.crafty	1000	88.8	1126	88.7	1128
197.parser	1800	148	1214	148	1219
252.eon	1300	63.5	2049	63.5	2049
253.perlbmk	1800	103	1742	101	1775
254.gap	1100	70.7	1556	69.4	1585
255.vortex	1900	80.4	2363	80.4	2363
256.bzip2	1500	147	1018	147	1018
300.twolf	3000	195	1541	195	1541

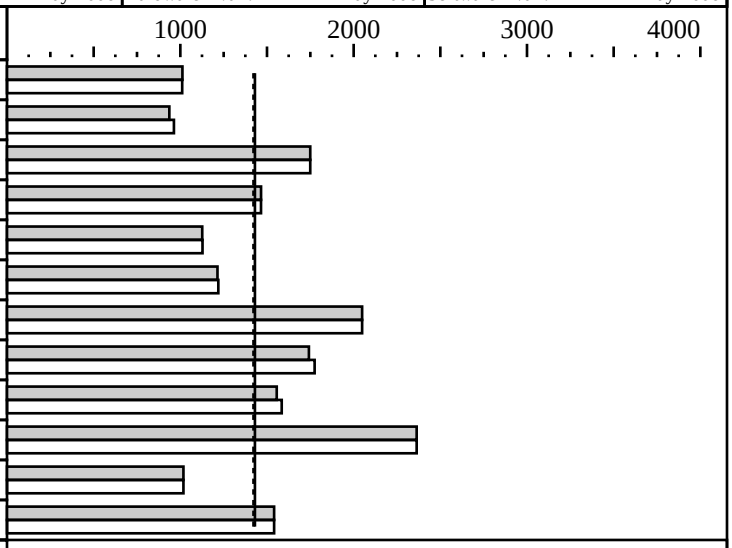

Hardware

CPU:	Intel Xeon processor 7041 (3.0GHz, 2x2MB L2, 800MHz bus)
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip (Hyper-Threading Technology disabled)
CPU(s) orderable:	1,2,4
Parallel:	No
Primary Cache:	12K micro-ops I + 16KBD (on chip) per core
Secondary Cache:	2048KB(I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	16x2048MB PC2-3200 dual-rank
Disk Subsystem:	1x36GB SAS
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler for 32-bit applications, (Version 9.1 Build 20060323Z) Microsoft Visual Studio .NET 7.0.9466 (for libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use

Base tuning for C programs:   -fast         +FDO  ONESTEP=yes shlw32M.lib
Base tuning for C++ programs: -fast -Qcxx_features +FDO  ONESTEP=yes
Portability flags:
  176.gcc: -Dalloca=_alloca /F10000000
  186.crafty: -DNT_i386
  253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
  164.gzip:     -fast               +FDO  ONESTEP=yes
  175.vpr:      -fast               +FDO  ONESTEP=yes
  176.gcc:      basepeak = 1
  181.mcf:      -fast               +FDO  ONESTEP=yes shlw32M.lib
  186.crafty:   -fast -Oa           +FDO  ONESTEP=yes shlw32M.lib
  197.parser:   -fast               +FDO  ONESTEP=yes
  252.eon:      -fast               +FDO
  253.perlbmk:  -fast -Oa           +FDO  ONESTEP=yes shlw32M.lib
  254.gap:      -fast               +FDO  ONESTEP=yes
  255.vortex:   -fast               +FDO  ONESTEP=yes shlw32M.lib
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    256.bzip2:    basepeak=1
    300.twolf:    -fast               +FDO              shlw32M.lib
BIOS Configuration Notes
  Hyper-Threading Technology disabled
Other Configuration Notes
  /NUMPROC=1 flag was added to boot.ini to invoke uniprocessor environment.
```