CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Advanced Micro Devices

Tyan Thunder K9QE (S4985) AMD Opteron (TM) 2220SE

SPECfp2000 = 2064

SPECfp_base2000 = 1893

SPEC license #: 49 | Tested by: AMD Austin, TX | Test date: Jul-2006 | Hardware Avail: Sep-2006 | Software Avail: Oct-2005

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	54.6	2932	54.7	2924
171.swim	3100	113	2747	114	2722
172.mgrid	1800	102	1758	102	1757
173.applu	2100	132	1593	125	1686
177.mesa	1400	127	1101	63.0	2224
178.galgel	2900	92.5	3136	85.7	3386
179.art	2600	54.9	4733	54.9	4733
183.equake	1300	71.8	1811	70.3	1850
187.facerec	1900	88.7	2142	88.7	2142
188.ammp	2200	179	1229	147	1501
189.lucas	2000	102	1963	87.5	2287
191.fma3d	2100	124	1691	123	1710
200.sixtrack	1100	129	854	129	855
301.apsi	2600	170	1526	171	1522

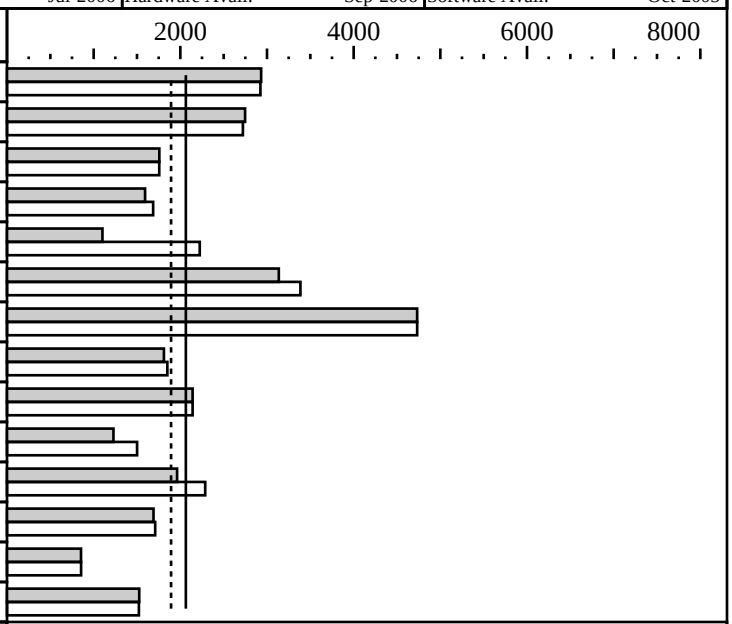

Hardware

CPU:	AMD Opteron (TM) 2220SE
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2,4
Parallel:	no
Primary Cache:	64KBI + 64KBD on chip per core
Secondary Cache:	1024KB (I+D) on chip per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x512MB, DDR2-667 CL4 ECC Reg
Disk Subsystem:	SATA, 74Gb
Other Hardware:	None

Software

Operating System:	Windows Server 2003 SP1 (32-bit)
Compiler:	Intel C++ 9.0 build 20050912Z for IA32, Intel Fortran 9.0 build 20050912Z for IA32, Microsoft Visual Studio .NET 7.0.9466 (libraries) PGI Fortran compiler 6.0-5 for Windows XP, PGI C compiler 6.0-5 for Windows XP, ACML Version 2.5.3 (bundled with PGI 6.0-5)
File System:	NTFS
System State:	default

Notes/Tuning Information

```
+FDO:
 icl, ifort  : PASS1=-Qprof_gen  PASS2=-Qprof_use
 pgf90       : PASS1=-Mpfi       PASS2=-Mpfo
ifort is the Intel Fortran compiler, icl is the Intel C++ compiler and
pgf90 is the PGI Fortran 90 compiler.
pgcc is the PGI C compiler.
ONESTEP is set to 1 for every compile with the PGI compilers.
Portability:
178.galgel:                 -Mfixed
Baseline: C      :  pgcc    -fastsse -Mipa=fast,inline
Baseline: Fortran:  pgf90   -fastsse -Mipa=fast,inline +FDO
Peak tuning:
168.wupwise:        pgf90   -fastsse -Mipa=fast,inline -Mnovect
171.swim:           ifort   -Qipo  -O3  -QaxN -QxW -Qunroll0 +FDO
172.mgrid:          pgf90   -fastsse -Mipa=fast,inline
173.applu:          ifort   -Qipo  -O3 -QaxN -QxW -auto +FDO
177.mesa:           icl     -Qipo -QxW -Qunroll1 -Qansi_alias +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                        -Qoption,c,-ip_ninl_max_stats=1500,-ip_ninl_max_total_stats=4500
 178.galgel:         pgf90   -fastsse -Mipa=fast,safe -Munix -lacml
                             RM_SOURCES=lapak.f90
 179.art:            pgcc     basepeak=yes
 183.equake:         icl     -O3 -Qipo -QxW +FDO
 187.facerec:        pgf90   basepeak=1
 188.ammp:           icl     -Oa   -QxW  -Zp4 -Qansi_alias
 189.lucas:          ifort   -Qipo -QxW -Qunroll1
 191.fma3d:          pgf90   -Mipa=fast,inline -fastsse -Mnovect +FDO
 200.sixtrack:       pgf90   -fastsse -Mipa=fast,inline
 301.apsi:           pgf90   -fastsse -Mipa=fast,inline
All memory slots populated on all CPU(s)
The system can be built using a Zippy 700W EPS12V power supply and any SSI-MEB case.
BIOS Changes: Enable Basic ECC
```