CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

IBM Corporation

IBM System p5 550 (2100 MHz, 1 CPU)

SPECfp2000 = 3321

SPECfp_base2000 = 3125

SPEC license #: 11 | Tested by: IBM Austin | Test date: Jun-2006 | Hardware Avail: Aug-2006 | Software Avail: Aug-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	51.8	3086	44.0	3636
171.swim	3100	74.1	4186	74.1	4186
172.mgrid	1800	64.2	2805	61.1	2948
173.applu	2100	84.4	2488	79.0	2658
177.mesa	1400	92.1	1520	91.1	1536
178.galgel	2900	41.9	6915	31.3	9275
179.art	2600	15.1	17207	15.3	16948
183.equake	1300	20.3	6396	20.0	6505
187.facerec	1900	66.9	2838	65.7	2893
188.ammp	2200	140	1570	127	1737
189.lucas	2000	36.2	5523	33.6	5960
191.fma3d	2100	113	1859	111	1884
200.sixtrack	1100	119	924	112	978
301.apsi	2600	135	1921	135	1919

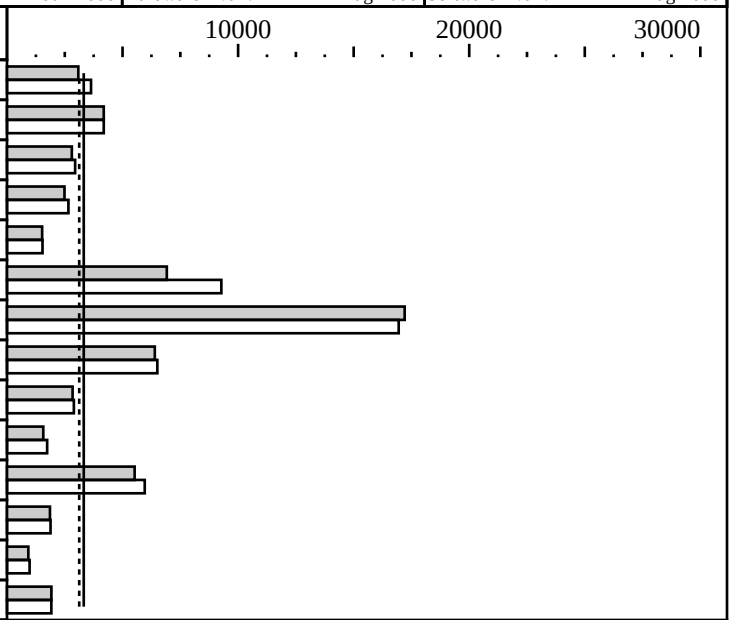

Hardware

CPU:	POWER5+
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip (SMT off)
CPU(s) orderable:	2,4 cores
Parallel:	No
Primary Cache:	64 KB I + 32 KB D on chip per core
Secondary Cache:	1920 KB I+D on chip per chip
L3 Cache:	36 MB I+D off chip per chip
Other Cache:	None
Memory:	32 GB (8x4 GB)
Disk Subsystem:	1x73GB SCSI, 15K RPM
Other Hardware:	None

Software

Operating System:	AIX 5L V5.3
Compiler:	XL C/C++ Enterprise Edition Version 8.0 for AIX XL Fortran Enterprise Edition Version 10.1 for AIX Other Software: ESSL 4.2.0.4
File System:	AIX/JFS2
System State:	Multi-user

Notes/Tuning Information

```
Portability Flags:
     -qfixed used in:        168.wupwise, 171.swim, 172.mgrid, 173.applu,
                             178.galgel, 200.sixtrack, 301.apsi
     -qsuffix=f=f90 used in: 178.galgel, 187.facerec, 189.lucas, 191.fma3d

Base Optimization Flags:
  Fortran:    -O5 -lhmu -blpdata -lmass
  C:          -qpdf1/pdf2
              -O5 -blpdata -qalign=natural

Peak Optimization Flags
  168.wupwise:  -O5 -qsave -blpdata -lhmu -lmass
  171.swim:     basepeak=1
  172.mgrid:    -qpdf1/pdf2
                -O4 -qipa=partition=large -q64 -blpdata
  173.applu:    -O5 -qarch=pwr3 -qtune=pwr3 -qalign=struct=natural -qfdpr -q64 -blpdata
                 fdpr -q -O3
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
  177.mesa:     -qpdf1/pdf2
                 -O5 -qfdpr
                 fdpr -q -O3
  178.galgel:   -qpdf1/pdf2
                -O5 -qfdpr -qalign=struct=natural -lhmu -blpdata -lmass -qessl -lessl
                fdpr -q -O3
  179.art:      -O5 -lhmu -blpdata
  183.equake:   -qpdf1/pdf2
                -O3 -qarch=auto -qtune=auto -qipa=level=2 -blpdata
  187.facerec:  -O5 -qsave -blpdata
  188.ammp:     -O5 -qalign=natural -qfdpr -blpdata -lhmu
                fdpr -q -O3
  189.lucas:    -O3 -qarch=auto -qtune=auto -qfdpr -blpdata -qessl -lessl
                fdpr -q -O3
  191.fma3d:    -qpdf1/pdf2
                -O3 -qarch=auto -qtune=auto -qipa=level=2 -q64 -lhmu -blpdata -lmass
  200.sixtrack: -O3 -qarch=auto -qtune=auto -qfdpr
                fdpr -q -O3
  301.apsi:     -O5


The installed OS level is AIX 5L for POWER Version 5.3 with the 5300-05 Recommended Technology Level.
The installed C/C++ compiler is XL C/C++ Enterprise Edition Version 8.0 for AIX with the March 2006 PTF.
The installed Fortran copiler is XL Fortran Enterprise Edition Version 10.1 with the May 2006 AIX PTF.

SMT:  Acronym for "Simultaneous Multi-Threading". A processor technology that allows
      the simultaneous execution of multiple thread contexts within a single processor
      core. (Enabled by default)
SUT:  Acronym for "System Under Test"
ESSL: Engineering and Scientific Subroutine Library
PTF:  IBM identifier for "Program Fix Level"

ANSI C89:       IBM XL C for AIX invoked as xlc
Fortran 77:     IBM XL Fortran for AIX invoked as xlf90
Fortran 90:     IBM XL Fortran for AIX invoked as xlf90

ulimits set to unlimited.
Large page mode and memory affinity were set as follows:
    vmo -r -o lgpg_regions=128 -o lgpg_size=16777216
    chuser capabilities=CAP_BYPASS_RAC_VMM,CAP_PROPAGATE $USER
    bosboot -aD
    shutdown -rF
    export MEMORY_AFFINITY=MCM

The following config-file entry was used to assign each benchmark process to a core:
     submit = bindprocessor $$ $SPECUSERNUM; $command
The "bindprocessor" AIX command binds a process to a CPU core.
Three cores were deconfigured and SMT disabled using the AIX commands
     smtctl -m off -w boot
     bosboot -aD
     shutdown -rF
     drmgr -r -c cpu
     drmgr -r -c cpu
     drmgr -r -c cpu
```