CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Intel(R) Corporation

Intel(R) D945GPM motherboard(3.8 GHz, Intel(R) Pentium(TM) 4 processor 670)

SPECfp2000 = 2037

SPECfp_base2000 = 2034

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Jul-2006 | Hardware Avail: Jul-2006 | Software Avail: May-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	43.6	3673	43.5	3674
171.swim	3100	126	2464	126	2465
172.mgrid	1800	113	1590	113	1590
173.applu	2100	117	1796	117	1796
177.mesa	1400	86.9	1610	86.9	1610
178.galgel	2900	76.8	3775	76.8	3775
179.art	2600	55.3	4705	55.3	4705
183.equake	1300	45.0	2891	43.9	2959
187.facerec	1900	91.4	2079	91.4	2079
188.ammp	2200	174	1264	173	1273
189.lucas	2000	92.8	2156	92.6	2161
191.fma3d	2100	128	1646	128	1646
200.sixtrack	1100	149	737	150	731
301.apsi	2600	184	1409	185	1409

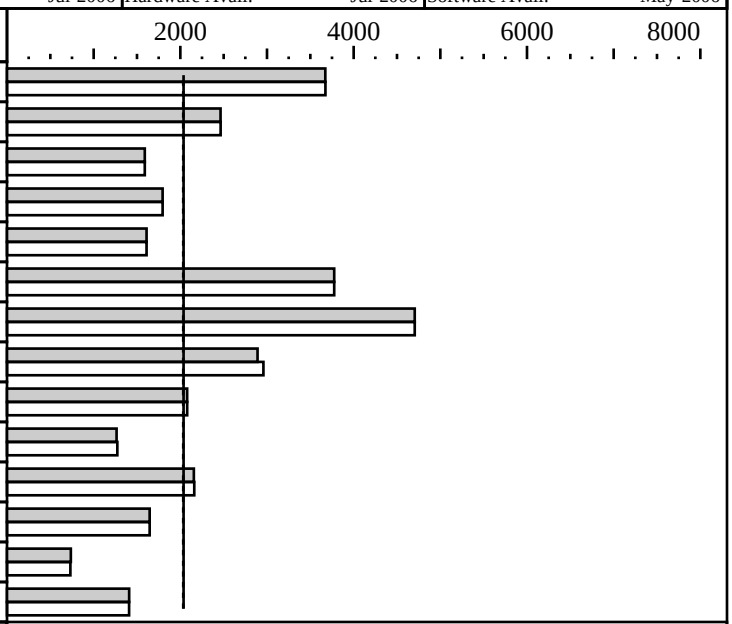

Hardware

CPU:	Intel(R) Pentium(TM) 4 processor 670(3.8 GHz, 800 MHz bus)
CPU MHz:	3800
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip (Hyper-Threading Technology enabled)
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12k micro-opsI + 16KBD per core, on chip
Secondary Cache:	2MB(I+D) per chip, on chip
L3 Cache:	None
Other Cache:	None
Memory:	2 GB (2 1GB Micron DDR2 667 CL5-5-5 DIMMs)
Disk Subsystem:	Maxtor DiamondMax 10 6B300S0 300GB NCQ Serial ATA (7200 RPM, 16MB cache)
Other Hardware:	ATI Radeon X850 XT PCI express graphics card

Software

Operating System:	Windows XP Professional SP2
Compiler:	Intel C++ and Fortran Compiler 9.1 for 32-bit applications Build 20060323Z Package ID: W_FC_P_9.1.020 Microsoft Visual Studio 2005(for libraries) SmartHeap Library Version 8.0 from http://www.microquill.com/
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=  -Qprof_gen  PASS2=-Qprof_use
Base tuning for Fortran programs:  -fast -Qansi_alias +FDO
Base tuning for C programs:  -fast    +FDO shlW32M-80.lib
Portability:
178.galgel:   -FI /F32000000
Peak tuning:
168.wupwise:  -fast -Qansi_alias +FDO
171.swim:     -fast -Qansi_alias +FDO
172.mgrid:    -fast -Qansi_alias +FDO
173.applu:  basepeak=yes
177.mesa:   basepeak=yes
178.galgel:   -fast -Qansi_alias +FDO
179.art:      basepeak=yes
183.equake:   -QxP -Oa -Qrcd -Qipo  +FDO  shlW32M-80.lib
187.facerec:  -fast -Qunroll1 -Qscalar_rep- +FDO
188.ammp:     -fast -Oa +FDO  shlW32M-80.lib
189.lucas:    -fast -Qprefetch- +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
191.fma3d:    basepeak=yes
200.sixtrack: -Qipo -QxP +FDO
301.apsi:     -fast +FDO
Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply
Product description located as of 07/2006
http://www.intel.com/products/motherboard/dg965wh/index.htm
The system bus runs at 800 MHz
```