CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

CELSIUS M450 (Intel Core 2 Duo processor E6400)

SPECint2000 = 2173

SPECint_base2000 = 2163

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Aug-2006 | Hardware Avail: Aug-2006 | Software Avail: May-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	106	1324	106	1324
175.vpr	1400	90.9	1540	89.0	1574
176.gcc	1100	43.3	2539	43.3	2539
181.mcf	1800	65.8	2735	65.9	2730
186.crafty	1000	51.7	1935	51.0	1959
197.parser	1800	106	1703	105	1712
252.eon	1300	46.6	2792	46.6	2791
253.perlbmk	1800	69.2	2603	69.2	2603
254.gap	1100	49.0	2246	48.1	2289
255.vortex	1900	51.6	3680	51.6	3680
256.bzip2	1500	96.8	1549	97.1	1545
300.twolf	3000	124	2422	124	2422

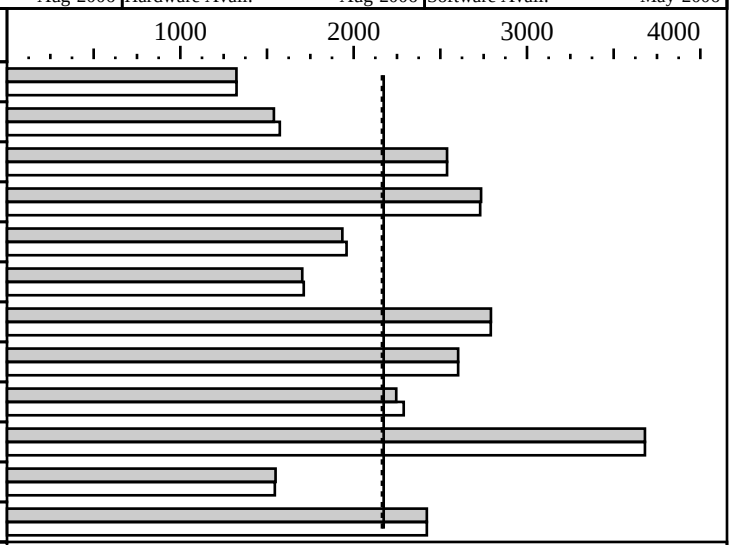

Hardware

CPU:	Intel Core 2 Duo processor E6400
CPU MHz:	2133
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Parallel:	No
Primary Cache:	32KB(I) + 32KB(D) on chip, per core
Secondary Cache:	2048KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x 1GB PC2-5300 5-5-5 2Rank SDRAM
Disk Subsystem:	1 x 160GB SATA 7200 RPM
Other Hardware:	None

Software

Operating System:	Windows XP Professional, Service Pack 2
Compiler:	Intel(R) C++ Compiler for 32-bit app., Version 9.1, - Build 20060519Z Package ID: W_CC_P_9.1.025 Microsoft Visual Studio .NET 2003 (for libraries) MicroQuill SmartHeap Library, Version 8 (shlW32M.lib)
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
Portability flags:
 176.gcc:     -Dalloca=_alloca /F10000000
 186.crafty:  -DNT_i386
 253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
 254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO

Feedback optimization:
  +FDO: PASS1= -Qprof_gen PASS2= -Qprof_use

Baseline Tuning Flags:
 for C programs:
 -fast +FDO shlW32M.lib
 for C++ program 252.eon:
 -fast -Qcxx_features +FDO

Peak Tuning Flags:
 164.gzip:     -fast +FDO
 175.vpr:      -fast +FDO
 176.gcc:      basepeak=yes
 181.mcf:      -fast +FDO shlW32M.lib
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
 186.crafty:    -fast +FDO
 197.parser:    -fast +FDO
 252.eon:       -fast -Qcxx_features +FDO
 253.perlbmk:   -fast +FDO shlW32M.lib
 254.gap:       -fast +FDO
 255.vortex     -fast +FDO shlW32M.lib
 256.bzip2:     -fast +FDO
 300.twolf:     -fast +FDO shlW32M.lib

Extra Libraries:
 shlW32M.lib = Microquill SmartHeap Library 8
 see www.microquill.com

The system bus runs at 1066 MHz

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries
```