CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

IBM Corporation

IBM System p5 550 (2100 Mhz, 1 CPU, SLES)

SPECfp2000 = 3282

SPECfp_base2000 = 2778

SPEC license #: 11 | Tested by: IBM Austin | Test date: Oct-2006 | Hardware Avail: Aug-2006 | Software Avail: Dec-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	47.0	3401	41.0	3901
171.swim	3100	91.0	3406	74.2	4179
172.mgrid	1800	74.4	2418	58.3	3089
173.applu	2100	96.4	2180	73.4	2860
177.mesa	1400	99.7	1404	99.7	1404
178.galgel	2900	52.0	5575	32.3	8980
179.art	2600	18.4	14164	16.2	16090
183.equake	1300	23.5	5523	19.3	6739
187.facerec	1900	67.5	2815	67.5	2815
188.ammp	2200	157	1399	155	1420
189.lucas	2000	58.9	3397	34.5	5801
191.fma3d	2100	121	1735	110	1901
200.sixtrack	1100	120	916	116	949
301.apsi	2600	127	2051	127	2047

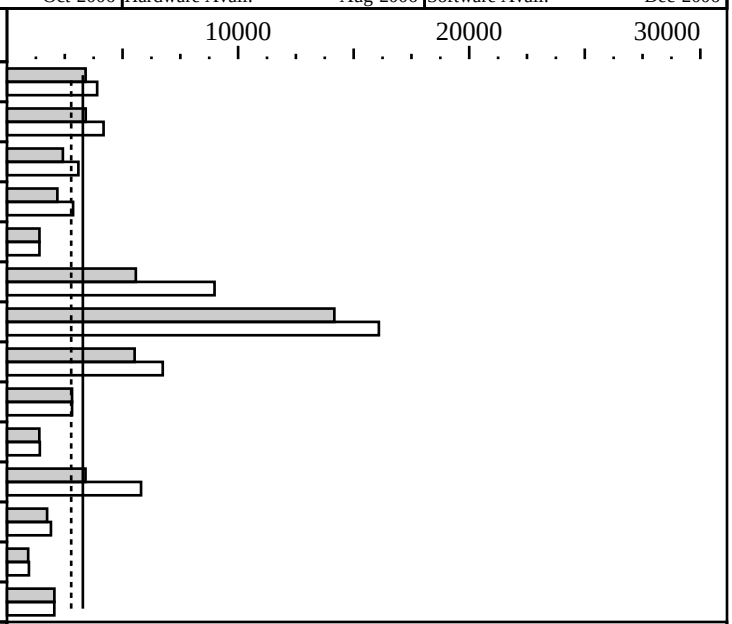

Hardware

CPU:	POWER5+
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 2 cores/chip (SMT off)
CPU(s) orderable:	2,4 core
Parallel:	No
Primary Cache:	64 KB I + 32 KB D on chip per core
Secondary Cache:	1920 KB I+D on chip per chip
L3 Cache:	36 MB I+D off chip per chip
Other Cache:	None
Memory:	32 GB (16x2GB)
Disk Subsystem:	1x73GB SCSI, 15K RPM
Other Hardware:	None

Software

Operating System:	SLES SUSE Linux Enterprise Server 10 (ppc) VERSION = 10 w/2.6.16.21-0.8-ppc64 Linux kernel
Compiler:	IBM XL C/C++ Advanced Edition V8.0.1 for Linux IBM XL Fortran Advanced Edition V10.1.1 for Linux
	Other software: - IBM Engineering and Scientific Subroutine Library (ESSL) for Linux - Version 4.2.5
File System:	reiserfs
System State:	Multi-User

Notes/Tuning Information

```
+FDO
    Feedback directed optimization enabled by:  PASS1=-qpdf1  PASS2=-qpdf2

FP compilers
   C: invoked as xlc
   Fortran 77 and Fortran 90: invoked as xlf90, except as noted below

FP Portability Flags
  -qfixed used in:        168.wupwise, 171.swim, 172.mgrid, 173.applu,
                          178.galgel, 200.sixtrack, 301.apsi
  -qsuffix=f=f90 used in: 178.galgel, 187.facerec, 189.lucas, 191.fma3d

FP Base Optimization Flags:
  C:       +FDO -O5
  Fortran: +FDO -O5
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
Floating Point Peak Flags

168.wupwise
    +FDO -O5 -qsave -lmass
    -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
171.swim
    +FDO -O5
    -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
172.mgrid
    +FDO -O4 -q64
    -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
173.applu
    +FDO -O5 -q64
    -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
177.mesa
    basepeak=1
178.galgel
    Fortran invoked as xlf90_r
    +FDO -O5 -qessl -lessl -lmass
    -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
179.art
    +FDO -O5
    -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
183.equake
    +FDO -O5
    -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
187.facerec
    basepeak=1
188.ammp
    +FDO -O3 -qalign=linuxppc
189.lucas
    +FDO -O3 -qarch=auto -qtune=auto
    -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
191.fma3d
    +FDO -O5
    -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
200.sixtrack
    +FDO -O3 -qarch=auto -qtune=auto
    -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
301.apsi
    Fortran invoked as xlf90_r
    +FDO -O5 -qessl
    -B/usr/share/libhugetlbfs/ -tl -Wl,--hugetlbfs-link=BDT
    extra_libs = -lessl


System Settings:
-- ulimit stack size set to unlimited


SMT: Acronym for 'Simultaneous Multi-Threading'.  A processor technology that allows
     the simultaneous execution of multiple thread contexts within a single processor
     core. SMT is enabled by default.

Large pages reserved as follows by root user:
    echo 30 > /proc/sys/vm/nr_hugepages
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
System configured with libhugetlbfs library for application access to large pages
Environment variables set as follows:
    export HUGETLB_MORECORE=yes

Linux booted with the options:
       maxcpus=1 smt-enabled=off

Each process was bound to a cpu using submit= with the taskset command
   submit = taskset -p -c $SPECUSERNUM $$ >/dev/null ; $command
```