CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL25p G2 (AMD Opteron (TM) 2218)

SPECfp_rate2000 = 45.1

SPECfp_rate_base2000 = 41.9

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Sep-2006 | Hardware Avail: Nov-2006 | Software Avail: May-2006

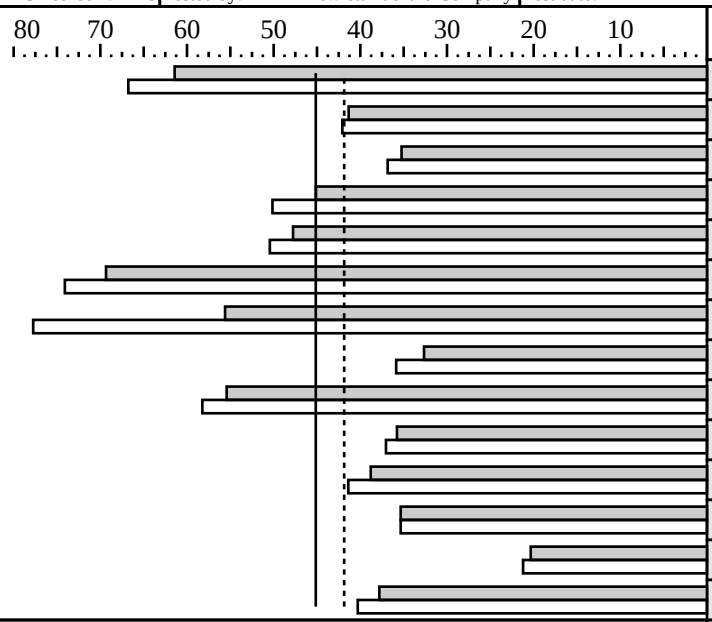

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	2	60.4	61.4	2	55.6	66.8
171.swim	2	174	41.3	2	171	42.1
172.mgrid	2	118	35.2	2	113	36.8
173.applu	2	108	45.1	2	97.2	50.1
177.mesa	2	68.0	47.8	2	64.4	50.4
178.galgel	2	97.0	69.3	2	90.8	74.1
179.art	2	108	55.6	2	77.6	77.7
183.equake	2	92.4	32.7	2	84.1	35.9
187.facerec	2	79.5	55.4	2	75.7	58.2
188.ammp	2	143	35.8	2	138	37.0
189.lucas	2	120	38.8	2	112	41.4
191.fma3d	2	138	35.3	2	138	35.3
200.sixtrack	2	125	20.3	2	120	21.2
301.apsi	2	160	37.8	2	150	40.3

Hardware

CPU:	AMD Opteron (TM) 2218
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2 chips
Parallel:	No
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8 GB (4x2 GB PC2-5300 CL5)
Disk Subsystem:	1x36.4 GB 10 K SAS
Other Hardware:	

Software

Operating System:	SuSE Linux Enterprise Server 9 (x86_64) SP 3 SuSE kernel 2.6.5-7.244-smp
Compiler:	PathScale EKOPath(TM) Compiler Suite, Release 2.4 AMD Core Math Library 3.6.0
File System:	Linux/ext2
System State:	Multi-user run level 3

Notes/Tuning Information

```
+FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata
+ACML: Linked with AMD Core Math Library
Base tuning for C programs: -Ofast -WOPT:mem_opnds=on +FDO
Base tuning for FORTRAN programs: -Ofast -LNO:fusion=2 -OPT:fast_complex=on +FDO
Portability flags:
  178.galgel:    -fixedform
Peak tuning:
  168.wupwise:   -Ofast -LNO:prefetch_ahead=5:prefetch=3
                 -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3
                -IPA:linear=on:plimit=50000:callee_limit=5000 -INLINE:aggressive=on
  171.swim:      -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 -m3dnow
  172.mgrid:     -Ofast -CG:gcm=off -OPT:IEEE_a=3:unroll_size=200
               -LNO:fusion=2:fission=1:blocking=off:prefetch_ahead=2 -WOPT:mem_opnds=on:aggstr=0
  173.applu:     -Ofast -CG:local_fwd_sched=on -OPT:ro=3 -TENV:X=3
                 -LNO:fusion=2:fission=2:full_unroll_size=10000 +FDO
  177.mesa:      -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on
                  -WOPT:mem_opnds=on +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    178.galgel:    -Ofast -OPT:fast_complex-on RM_SOURCES=lapak.f90 +ACML +FDO
    179.art:       -O3 -OPT:Ofast -fno-math-errno -mno-sse2 -m32
    183.equake:    -Ofast -CG:load_exe=2 -WOPT:mem_opnds=on -m32 +FDO
    187.facerec:   -Ofast -LNO:fusion=2 -OPT:fast_complex=on:IEEE_NaN_Inf=off:unroll_size=0 +FDO
    188.ammp:      -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
                   -fno-math-errno -TENV:X=4 +FDO
    189.lucas:     -Ofast -OPT:ro=3:fast_nint=off:unroll_size=256 -WOPT:mem_opnds=on +FDO
    191.fma3d:     -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
                   -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
    200.sixtrack:  -O3 -OPT:Ofast:Olimit=6000:early_intrinsics=on -fno-math-errno
                   -CG:load_exe=1 +FDO
    301.apsi:      -Ofast -CG:load_exe=0 -LNO:prefetch=0:simd=2
  BIOS Configuration Notes
    Node Interleaving is Disabled
  Other Configuration Notes
     Taskset utility used to bind process to CPU(s)
```