CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX300 S3, Intel Xeon processor E5310, 1.60 GHz

SPECint_rate2000 = 68.8

SPECint_rate_base2000 = 68.8

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Oct-2006 | Hardware Avail: Nov-2006 | Software Avail: May-2006

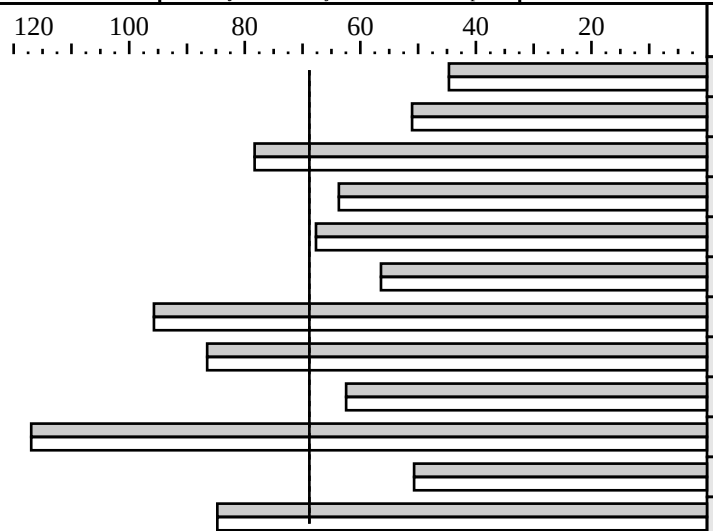

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	4	145	44.7	4	145	44.7
175.vpr	4	127	51.0	4	127	51.0
176.gcc	4	65.2	78.3	4	65.2	78.3
181.mcf	4	131	63.7	4	131	63.7
186.crafty	4	68.6	67.7	4	68.6	67.7
197.parser	4	148	56.4	4	148	56.4
252.eon	4	63.0	95.7	4	63.0	95.7
253.perlbmk	4	96.5	86.5	4	96.5	86.5
254.gap	4	81.7	62.5	4	81.7	62.5
255.vortex	4	75.4	117	4	75.4	117
256.bzip2	4	137	50.7	4	137	50.7
300.twolf	4	164	84.7	4	164	84.7

Hardware

CPU:	Intel Xeon processor E5310 (1.60 GHz, 2x4MB L2, 1066 MHz system bus)
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1,2 chips
Parallel:	No
Primary Cache:	32KB(I) + 32KB(D) on chip, per core
Secondary Cache:	8MB(I+D) on chip, per chip (4MB shared per 2 cores)
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x1GB DDR2-RAM PC2-4200F (CAS 4-4-4)
Disk Subsystem:	Seagate ST373454SS (SAS, 15.4krpm, 73GB)
Other Hardware:	none

Software

Operating System:	Windows Server 2003 Enterprise Edition + SP1 (32-bit)
Compiler:	Intel C++ Compiler 9.1 Build 20060323Z (for 32-bit applications), Microsoft Visual Studio .Net 2003 7.1.3088 (for libraries), SmartHeap Library Version 8.0 from http://www.microquill.com
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
GENERAL
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use

Portability flags
   176.gcc:     -Dalloca=_alloca /F10000000
   186.crafty:  -DNT_i386
   253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
   254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO

Base tuning flags
   for C programs:   -fast +FDO shlW32M.lib
   for C++ programs: -fast -Qcxx_features +FDO shlW32M.lib

Peak tuning flags
   same as baseline (basepeak=true set globally)

The system bus runs at 1066 MHz

This result was measured with 32-bit binaries using the 32-bit version of
the operating system.
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
BIOS configuration:
Adjacent Sector Prefetch = disable

The PRIMERGY RX300 S3 and the PRIMERGY TX300 S3
are electronically equivalent.

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries
```