CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY RX300 S3, Intel Xeon processor X5355, 2.66 GHz

SPECint_rate2000 = 105

SPECint_rate_base2000 = 105

SPEC license #: 22 | Tested by: Fujitsu Siemens Computers | Test date: Oct-2006 | Hardware Avail: Jan-2007 | Software Avail: May-2006

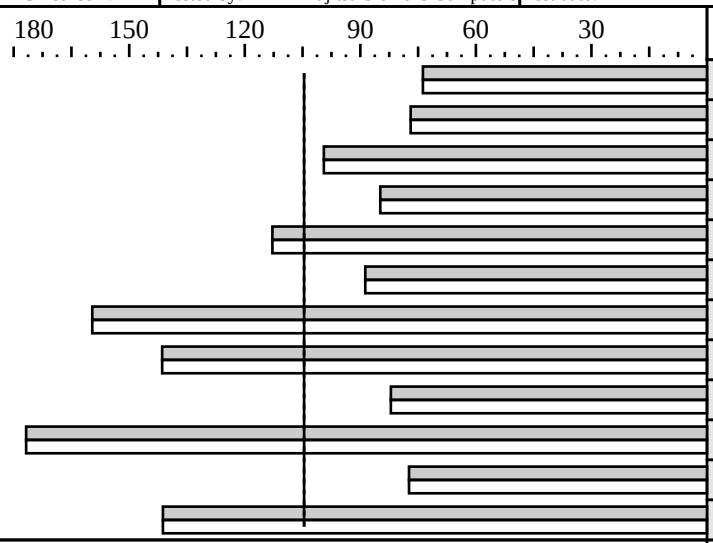

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	4	88.1	73.8	4	88.1	73.8
175.vpr	4	84.4	76.9	4	84.4	76.9
176.gcc	4	51.3	99.5	4	51.3	99.5
181.mcf	4	98.5	84.8	4	98.5	84.8
186.crafty	4	41.1	113	4	41.1	113
197.parser	4	94.1	88.7	4	94.1	88.7
252.eon	4	37.8	160	4	37.8	160
253.perlbmk	4	59.0	141	4	59.0	141
254.gap	4	62.2	82.1	4	62.2	82.1
255.vortex	4	49.9	177	4	49.9	177
256.bzip2	4	90.0	77.4	4	90.0	77.4
300.twolf	4	98.5	141	4	98.5	141

Hardware

CPU:	Intel Xeon processor X5355 (2.66 GHz, 2x4MB L2, 1333 MHz system bus)
CPU MHz:	2666
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1,2 chips
Parallel:	No
Primary Cache:	32KB(I) + 32KB(D) on chip, per core
Secondary Cache:	8MB(I+D) on chip, per chip (4MB shared per 2 cores)
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x1GB DDR2-RAM PC2-5300F (CAS 5-5-5)
Disk Subsystem:	Seagate ST373454SS (SAS, 15.4krpm, 73GB)
Other Hardware:	none

Software

Operating System:	Windows Server 2003 Enterprise Edition + SP1 (32-bit)
Compiler:	Intel C++ Compiler 9.1 Build 20060323Z (for 32-bit applications), Microsoft Visual Studio .Net 2003 7.1.3088 (for libraries), SmartHeap Library Version 8.0 from http://www.microquill.com
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
GENERAL
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use

Portability flags
   176.gcc:     -Dalloca=_alloca /F10000000
   186.crafty:  -DNT_i386
   253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
   254.gap:     -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO

Base tuning flags
   for C programs:   -fast +FDO shlW32M.lib
   for C++ programs: -fast -Qcxx_features +FDO shlW32M.lib

Peak tuning flags
   same as baseline (basepeak=true set globally)

The system bus runs at 1333 MHz

This result was measured with 32-bit binaries using the 32-bit version of
the operating system.
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
BIOS configuration:
Adjacent Sector Prefetch = disable

The PRIMERGY RX300 S3 and the PRIMERGY TX300 S3
are electronically equivalent.

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries
```