CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Supermicro

Motherboard X7DB8(2.66GHz, Intel Xeon X5355 processor)

SPECfp2000 = 2589

SPECfp_base2000 = 2586

SPEC license #01176 | Tested by: Supermicro | Test date: Nov-2006 | Hardware Avail: Nov-2006 | Software Avail: Mar-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	46.7	3428	46.7	3428
171.swim	3100	110	2818	110	2817
172.mgrid	1800	111	1627	110	1629
173.applu	2100	109	1930	109	1930
177.mesa	1400	55.8	2511	55.8	2511
178.galgel	2900	44.9	6465	44.9	6460
179.art	2600	28.0	9301	28.0	9301
183.equake	1300	42.7	3043	41.8	3110
187.facerec	1900	68.6	2770	68.7	2764
188.ammp	2200	115	1911	114	1931
189.lucas	2000	74.6	2682	74.6	2682
191.fma3d	2100	112	1876	112	1876
200.sixtrack	1100	103	1070	104	1055
301.apsi	2600	173	1504	173	1503

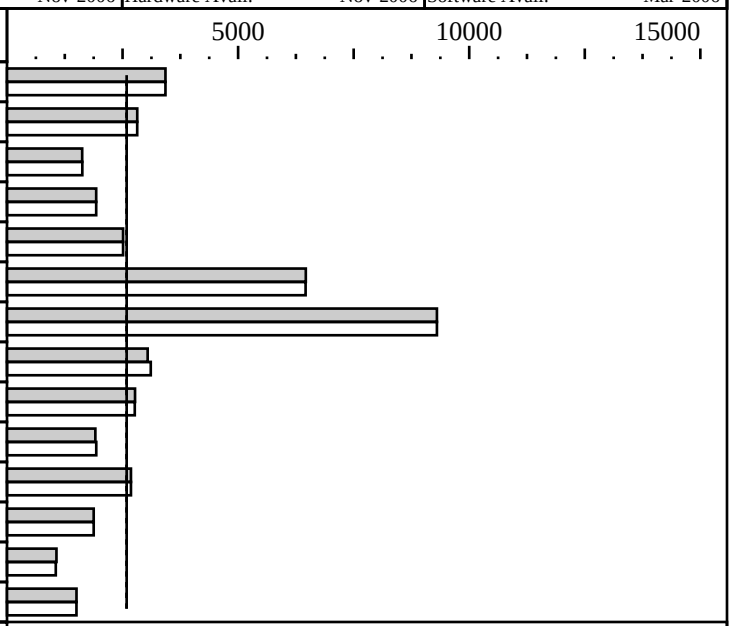

Hardware

CPU:	Intel Xeon X5355 processor (2.66 GHz,1333MHz bus)
CPU MHz:	2660
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Parallel:	N/A
Primary Cache:	32KBI + 32KBD on chip per core
Secondary Cache:	8MB(I+D) on chip, per chip (4MB shared per 2 cores)
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8 X 2GB DDR2 ECC CL5 667MHz FBDIMM
Disk Subsystem:	1 X Seagate Barracuda 120GB 7200 RPM
Other Hardware:	N/A

Software

Operating System:	Windows Server 2003 Enterprise Edition 32-bits w/ SP1
Compiler:	Intel C++ and Fortran Compiler 9.1 for 32-bit applications Build 20060323Z Package ID: W_FC_P_9.1.020 Microsoft Visual Studio 2005(for libraries) SmartHeap Library Version 8.0 from http://www.microquill.com/
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=  -Qprof_gen  PASS2=-Qprof_use
Base tuning for Fortran programs:  -fast -Qansi_alias +FDO
Base tuning for 177.mesa:  -fast    +FDO shlW32M.lib
Base tuning for 179.art:  -fast     +FDO shlW32M.lib
Base tuning for 183.equake:  -fast  +FDO shlW32M.lib
Base tuning for 188.ammp:  -fast    +FDO shlW32M.lib
Portability:
178.galgel:   -FI /F32000000
Peak tuning:
168.wupwise:  -fast -Qansi_alias +FDO
171.swim:     -fast -Qansi_alias +FDO
172.mgrid:    -fast -Qansi_alias +FDO
173.applu:  basepeak=yes
177.mesa:   basepeak=yes
178.galgel:   -fast -Qansi_alias +FDO
179.art:      basepeak=yes
183.equake:   -QxP -Oa -Qrcd -Qipo  +FDO  shlW32M.lib
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
187.facerec:  -fast -Qunroll1 -Qscalar_rep- +FDO
188.ammp:     -fast -Oa +FDO  shlW32M.lib
189.lucas:    -fast -Qprefetch- +FDO
191.fma3d:    basepeak=yes
200.sixtrack: -Qipo -QxP +FDO
301.apsi:     -fast +FDO

     Tested systems can be used with SC816S-R700 case,
   To ensure system stability, a 500W (minimum) ATX power supply [4-pin (+12V), 8-pin (+12V) and 24-pin are required]
   Product description located as of http://www.supermicro.com/products/motherboard/Xeon1333/5000P/X7DB8.cfm
     The system bus runs at 1333 MHz
     shlw32m-80.lib is the V8.0 SmartHeap library renamed to co-exist with older versions
```