SPEC® CINT2006 Result

Hewlett-Packard Company

HP Integrity Superdome
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECint®_rate2006 = 797

SPECint_rate_base2006 = 744

CPU2006 license: 03		**Test date:**	Oct-2006
Test sponsor:	Hewlett-Packard Company	**Hardware Availability:**	Sep-2006
Tested by:	Hewlett-Packard Company	**Software Availability:**	Sep-2006

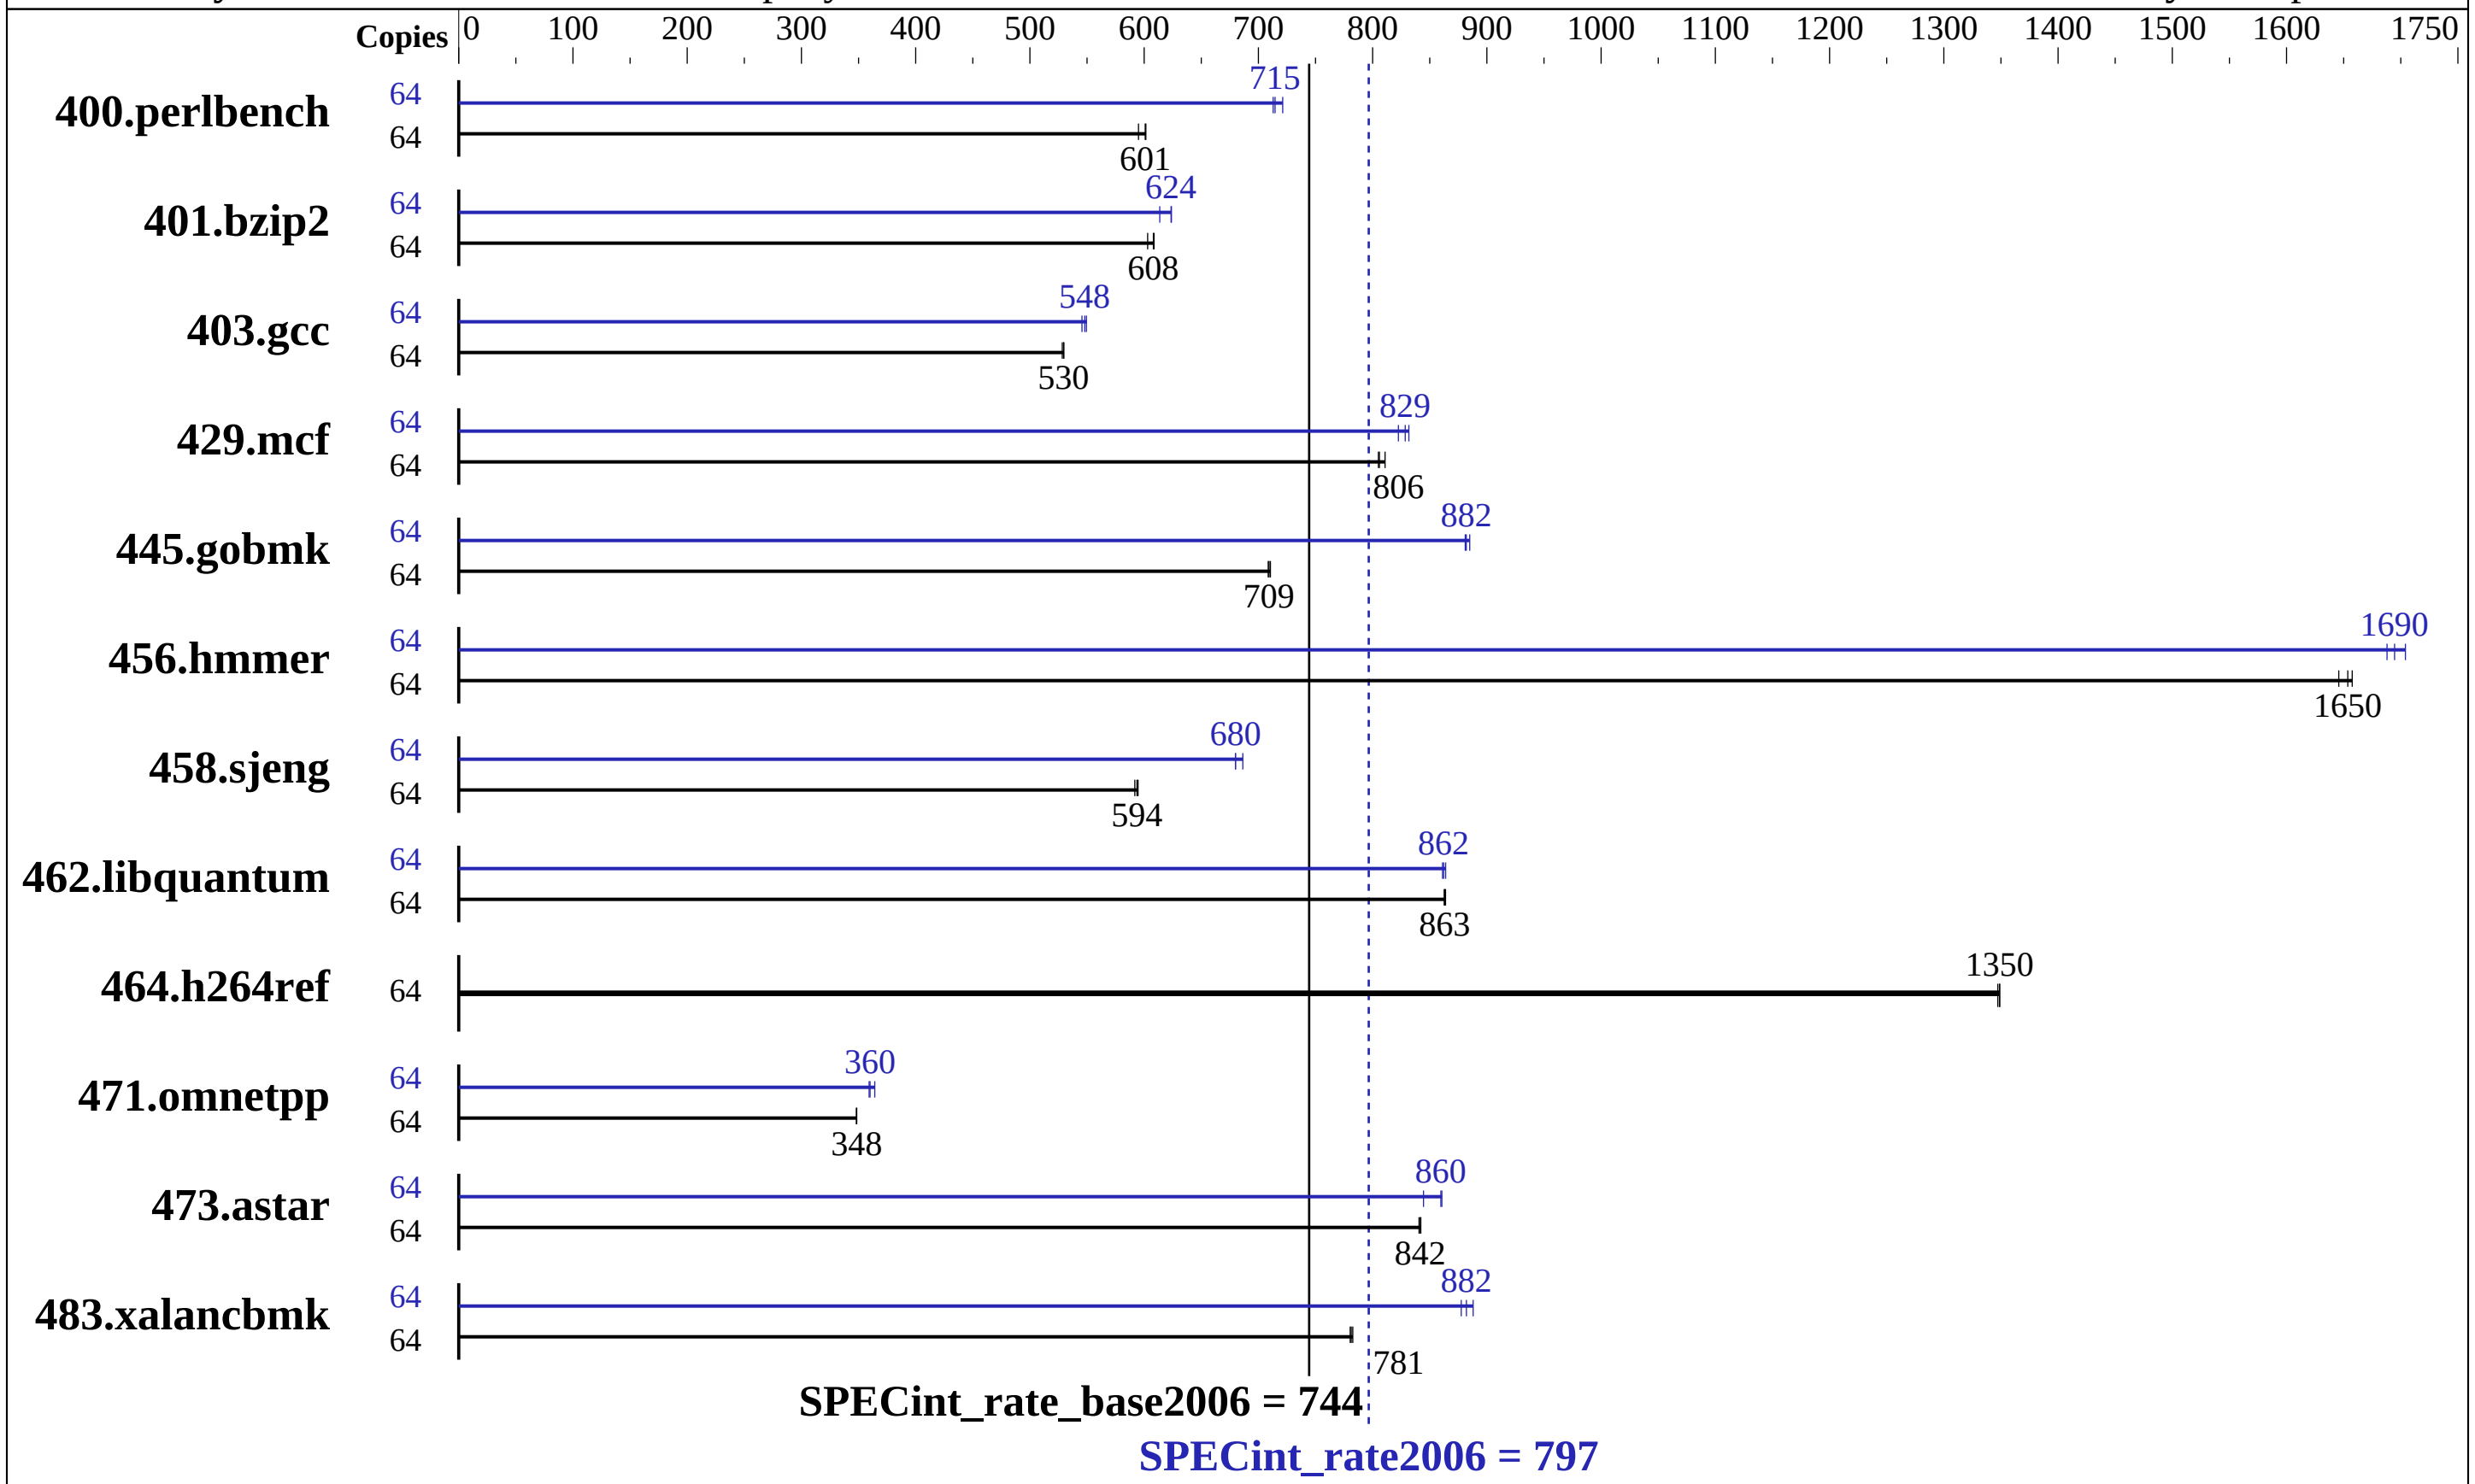

Hardware

CPU Name:	Dual-Core Intel Itanium 2 9040
CPU Characteristics:	1.6GHz/18MB, 533MHz FSB
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	64 cores, 32 chips, 2 cores/chip
CPU(s) orderable:	1-64 chips
Primary Cache:	16 KB I + 16 KB D on chip per core
Secondary Cache:	1 MB I + 256 KB D on chip per core
L3 Cache:	9 MB I+D on chip per core
Other Cache:	None
Memory:	256 GB (256x1GB DIMMs)
Disk Subsystem:	3x73GB 15K RPM SCSI (striped)
Other Hardware:	None

Software

Operating System:	HPUX11i-TCOE B.11.23.0609
Compiler:	HP C/aC++ Developer's Bundle C.11.23.12
Auto Parallel:	No
File System:	vxfs
System State:	Multi-user
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	MicroQuill Smartheap 8.0

Hewlett-Packard Company

HP Integrity Superdome
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECint_rate2006 = 797

SPECint_rate_base2006 = 744

CPU2006 license: 03
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company
Test date: Oct-2006
Hardware Availability: Sep-2006
Software Availability: Sep-2006

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	**1041**	**601**	1051	595	1040	601	64	867	721	877	713	**875**	**715**
401.bzip2	64	1024	603	**1016**	**608**	1015	609	64	**990**	**624**	1006	614	990	624
403.gcc	64	**973**	**530**	973	530	975	528	64	938	549	**940**	**548**	944	546
429.mcf	64	720	811	**724**	**806**	725	805	64	702	832	710	823	**704**	**829**
445.gobmk	64	**946**	**709**	945	711	947	709	64	762	881	759	885	**761**	**882**
456.hmmer	64	360	1660	363	1650	**361**	**1650**	64	**352**	**1690**	354	1690	350	1700
458.sjeng	64	1302	595	1309	592	**1304**	**594**	64	1139	680	**1139**	**680**	1128	686
462.libquantum	64	**1536**	**863**	1537	863	1535	864	64	1535	864	1540	861	**1538**	**862**
464.h264ref	64	1051	1350	**1050**	**1350**	1050	1350	64	1051	1350	**1050**	**1350**	1050	1350
471.omnetpp	64	1149	348	1148	348	**1148**	**348**	64	1098	364	**1111**	**360**	1113	359
473.astar	64	533	842	534	841	**534**	**842**	64	522	861	532	845	**523**	**860**
483.xalancbmk	64	566	780	564	783	**565**	**781**	64	**501**	**882**	503	878	497	888

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
The system had the September 2006 HP-UX 11i v2 Technical Computing
Operating Environment (TCOE) and compilers installed, along with
the following patches:

PHSS_34858  linker + fdp cumulative patch
PHSS_34853  Math Library Cumulative Patch
PHSS_34854  Integrity Unwind Library
PHSS_34855  HP C Compiler (A.06.12)
PHSS_34856  aC++ Compiler (A.06.12)
PHSS_34857  u2comp/be/plugin library patch
PHSS_34395  FORTRAN I/O Library [libIO77]
PHSS_34397  FORTRAN Intrinsics [libF90 B.11.23.17]
PHSS_34399  Fortran Product Patch, v3.1 to v3.1.1
PHKL_34020  Perfmon enhancements and Itanium Dual-Core

The following kernel tunables were set, in addition to the defaults
set by the Technical Computing OE:

dbc_max_pct=20
dbc_min_pct=20
maxdsiz=3221225472
maxssiz=401604608
```

Platform Notes

```
The system was configured as a single partition with 8 cells and
4 processors (8 cores) per cell.  Memory was configured as 50% local
and 50% interleaved.

The following config file entry was used to bind
processes to cells using the HP-UX "mpsched" utility:
submit = let "MYNUM=$SPECCOPYNUM" ; let "LDOM=\$MYNUM/8" ; mpsched -l \$LDOM $command
```

Base Compiler Invocation

C benchmarks:
`/opt/ansic/bin/cc -Ae`

C++ benchmarks:
`/opt/aCC/bin/aCC -Aa`

Base Portability Flags

400.perlbench: -DSPEC_CPU_HPUX_IA64
403.gcc: -DSPEC_CPU_HPUX
462.libquantum: -DSPEC_CPU_HPUX
483.xalancbmk: -DSPEC_CPU_HPUX_IA64

Base Optimization Flags

C benchmarks:
`+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M -Wl,-N`

C++ benchmarks:
`+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M -Wl,-N /usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a`

Peak Compiler Invocation

C benchmarks:
`/opt/ansic/bin/cc -Ae`

C++ benchmarks:
`/opt/aCC/bin/aCC -Aa`

Hewlett-Packard Company

HP Integrity Superdome
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECint_rate2006 = 797

SPECint_rate_base2006 = 744

CPU2006 license: 03		**Test date:**	Oct-2006
Test sponsor:	Hewlett-Packard Company	**Hardware Availability:**	Sep-2006
Tested by:	Hewlett-Packard Company	**Software Availability:**	Sep-2006

Peak Portability Flags

400.perlbench: -DSPEC_CPU_HPUX_IA64
403.gcc: -DSPEC_CPU_HPUX
462.libquantum: -DSPEC_CPU_HPUX
483.xalancbmk: -DSPEC_CPU_HPUX_IA64

Peak Optimization Flags

C benchmarks:

400.perlbench: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M -Wl,-N

401.bzip2: Same as 400.perlbench

403.gcc: Same as 400.perlbench

429.mcf: Same as 400.perlbench

445.gobmk: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M +Odataprefetch=direct

456.hmmer: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M

458.sjeng: Same as 445.gobmk

462.libquantum: Same as 456.hmmer

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M /usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a

473.astar: +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap /usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a

483.xalancbmk: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M +Onoparmsoverlap /usr/lib/hpux32/libCsup.a /opt/smartheap/SmartHeap_8/lib/libsmartheap.a

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.08.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.08.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:10:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 November 2006.