SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec LX211 (Intel Xeon E5320)

SPECint®_rate2006 = 51.2

SPECint_rate_base2006 = 51.2

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Feb-2007
Hardware Availability: Feb-2007
Software Availability: May-2006

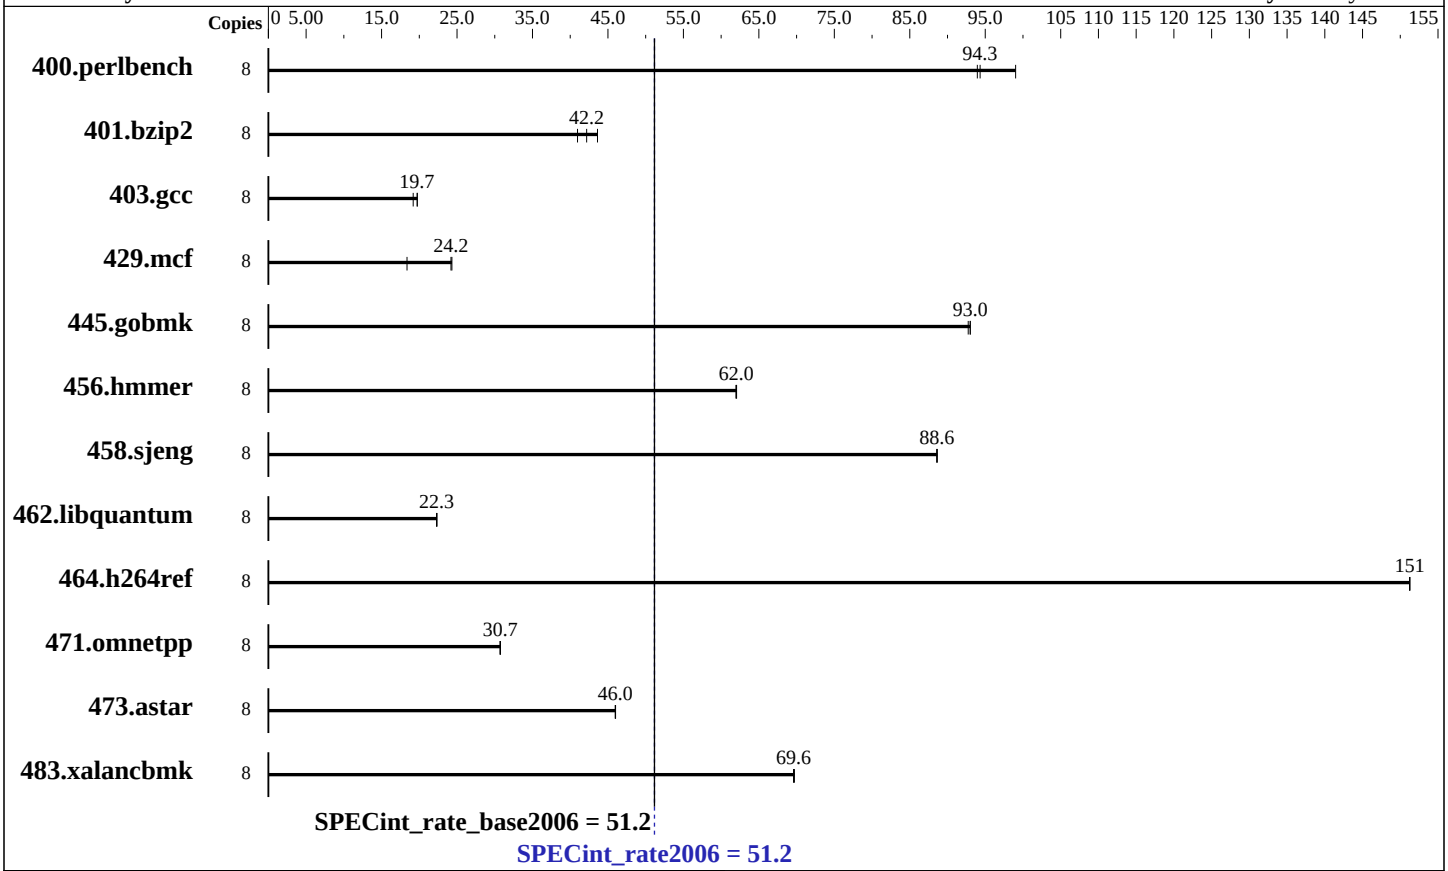

Hardware

CPU Name:	Intel Xeon E5320
CPU Characteristics:	1066MHz system bus
CPU MHz:	1860
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1-2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	6 GB (6x1GB DDR2-RAM PC2-5300F CAS 5-5-5)
Disk Subsystem:	120 GB SATA, 7200RPM
Other Hardware:	None

Software

Operating System:	Windows Server 2003 Enterprise Edition + SP1 (32-bit)
Compiler:	Intel C++ Compiler for IA32 version 9.1 Package ID W_CC_C_9.1.025 Build no 20060519Z Microsoft Visual Studio .NET 2003 7.1.3088 (for libraries)
Auto Parallel:	No
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	Microquill SmartHeap Library v.8.0 for SMP

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec LX211 (Intel Xeon E5320)

SPECint_rate2006 = 51.2

SPECint_rate_base2006 = 51.2

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Feb-2007
Hardware Availability: Feb-2007
Software Availability: May-2006

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	789	99.0	832	94.0	**829**	**94.3**	8	789	99.0	832	94.0	**829**	**94.3**
401.bzip2	8	**1830**	**42.2**	1884	41.0	1770	43.6	8	**1830**	**42.2**	1884	41.0	1770	43.6
403.gcc	8	**3266**	**19.7**	3356	19.2	3263	19.7	8	**3266**	**19.7**	3356	19.2	3263	19.7
429.mcf	8	3000	24.3	3971	18.4	**3015**	**24.2**	8	3000	24.3	3971	18.4	**3015**	**24.2**
445.gobmk	8	**902**	**93.0**	902	93.0	905	92.7	8	**902**	**93.0**	902	93.0	905	92.7
456.hmmer	8	1204	62.0	1203	62.0	**1204**	**62.0**	8	1204	62.0	1203	62.0	**1204**	**62.0**
458.sjeng	8	1093	88.6	**1093**	**88.6**	1092	88.6	8	1093	88.6	**1093**	**88.6**	1092	88.6
462.libquantum	8	7436	22.3	**7431**	**22.3**	7422	22.3	8	7436	22.3	**7431**	**22.3**	7422	22.3
464.h264ref	8	1171	151	1170	151	**1170**	**151**	8	1171	151	1170	151	**1170**	**151**
471.omnetpp	8	1626	30.8	1628	30.7	**1628**	**30.7**	8	1626	30.8	1628	30.7	**1628**	**30.7**
473.astar	8	1222	46.0	**1221**	**46.0**	1221	46.0	8	1222	46.0	**1221**	**46.0**	1221	46.0
483.xalancbmk	8	**793**	**69.6**	792	69.7	793	69.6	8	**793**	**69.6**	792	69.7	793	69.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Base Compiler Invocation

C benchmarks:
```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:
```
icl -Qvc7.1
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`

Base Optimization Flags

C benchmarks:
```
-fast /F512000000 shlSMPMt.lib            -link /FORCE:MULTIPLE
```

C++ benchmarks:
```
-fast -Qcxx_features /F512000000 shlSMPMt.lib
            -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Optimization Flags

C benchmarks:

400.perlbench: `basepeak = yes`

401.bzip2: `basepeak = yes`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `basepeak = yes`

456.hmmer: `basepeak = yes`

458.sjeng: `basepeak = yes`

462.libquantum: `basepeak = yes`

464.h264ref: `basepeak = yes`

C++ benchmarks:

471.omnetpp: `basepeak = yes`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Itautec-ic91-flags.20090714.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Itautec-ic91-flags.20090714.xml`

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec LX211 (Intel Xeon E5320)

SPECint_rate2006 = 51.2

SPECint_rate_base2006 = 51.2

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Feb-2007
Hardware Availability: Feb-2007
Software Availability: May-2006

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:31:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 March 2007.