



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECint®\_rate2006 = 56.4

NovaScale T840 (1.86 GHz, Intel Xeon E5320)

SPECint\_rate\_base2006 = 54.8

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2007

Hardware Availability: Jan-2007

Software Availability: Nov-2006

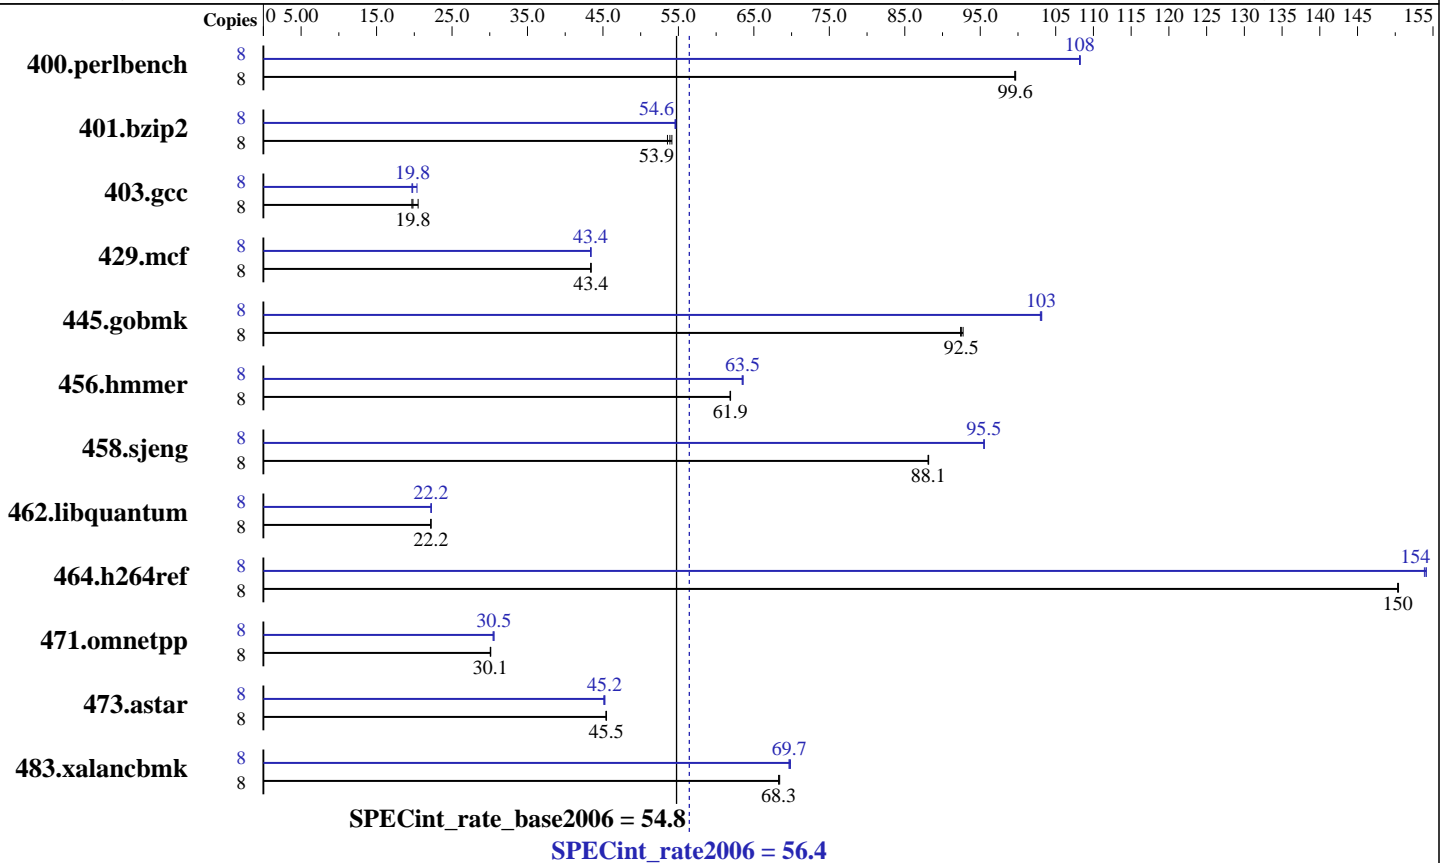

### Hardware

CPU Name: Intel Xeon E5320  
 CPU Characteristics: 1.86 GHz, 8MB L2, 1066MHz bus  
 CPU MHz: 1860  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 8 GB (667 MHz ECC CL5 DDR2 FB-DIMM)  
 Disk Subsystem: 3x73GB SCSI 15000 rpm  
 Other Hardware: None

### Software

Operating System: Windows Server 2003 Enterprise X64 Edition  
 Compiler: Intel C++ Compiler 9.1.033 for 32-bit apps, Build 20061103Z Package ID: W\_CC\_P\_9.1.033 Microsoft Visual Studio .NET 2003 (libraries)  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: MicroQuill SmartHeap Library 8.0 (shIW32M.lib)



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECint\_rate2006 = 56.4

NovaScale T840 (1.86 GHz, Intel Xeon E5320)

SPECint\_rate\_base2006 = 54.8

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Mar-2007  
Hardware Availability: Jan-2007  
Software Availability: Nov-2006

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	785	99.6	<u>785</u>	<u>99.6</u>	784	99.7	8	722	108	<u>723</u>	<u>108</u>	723	108
401.bzip2	8	1442	53.6	1426	54.1	<u>1433</u>	<u>53.9</u>	8	1412	54.7	1415	54.5	<u>1413</u>	<u>54.6</u>
403.gcc	8	3272	19.7	<u>3249</u>	<u>19.8</u>	3141	20.5	8	3271	19.7	<u>3256</u>	<u>19.8</u>	3164	20.4
429.mcf	8	1681	43.4	1680	43.4	<u>1681</u>	<u>43.4</u>	8	<u>1682</u>	<u>43.4</u>	1682	43.4	1680	43.4
445.gobmk	8	908	92.4	<u>907</u>	<u>92.5</u>	905	92.7	8	815	103	814	103	<u>814</u>	<u>103</u>
456.hammer	8	1206	61.9	1207	61.9	<u>1206</u>	<u>61.9</u>	8	1174	63.6	<u>1175</u>	<u>63.5</u>	1176	63.4
458.sjeng	8	<u>1099</u>	<u>88.1</u>	1098	88.2	1099	88.1	8	1013	95.5	<u>1014</u>	<u>95.5</u>	1014	95.5
462.libquantum	8	7465	22.2	<u>7467</u>	<u>22.2</u>	7469	22.2	8	7453	22.2	7457	22.2	<u>7456</u>	<u>22.2</u>
464.h264ref	8	<u>1177</u>	<u>150</u>	1178	150	1177	150	8	1151	154	<u>1149</u>	<u>154</u>	1149	154
471.omnetpp	8	1659	30.1	<u>1662</u>	<u>30.1</u>	1662	30.1	8	<u>1637</u>	<u>30.5</u>	1643	30.4	1637	30.6
473.astar	8	1237	45.4	<u>1236</u>	<u>45.5</u>	1235	45.5	8	<u>1242</u>	<u>45.2</u>	1245	45.1	1241	45.3
483.xalancbmk	8	<u>808</u>	<u>68.3</u>	807	68.4	808	68.3	8	790	69.8	792	69.7	<u>792</u>	<u>69.7</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Base Compiler Invocation

C benchmarks:  
icl -Qvc7.1 -Qc99  
C++ benchmarks:  
icl -Qvc7.1

## Base Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32

## Base Optimization Flags

C benchmarks:  
-fast /F512000000 shlw32m.lib -link /FORCE:MULTIPLE  
C++ benchmarks:  
-fast -Qcxx\_features /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECint\_rate2006 = 56.4**

NovaScale T840 (1.86 GHz, Intel Xeon E5320)

**SPECint\_rate\_base2006 = 54.8**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Bull SAS

**Test date:** Mar-2007

**Hardware Availability:** Jan-2007

**Software Availability:** Nov-2006

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks:

icl -Qvc7.1 -Qc99

C++ benchmarks:

icl -Qvc7.1

## Peak Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32

## Peak Optimization Flags

C benchmarks:

400.perlbench: -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast /F512000000  
shlw32m.lib -link /FORCE:MULTIPLE

401.bzip2: Same as 400.perlbench

403.gcc: Same as 400.perlbench

429.mcf: -fast /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE

445.gobmk: Same as 400.perlbench

456.hmmer: Same as 400.perlbench

458.sjeng: Same as 400.perlbench

462.libquantum: Same as 400.perlbench

464.h264ref: Same as 400.perlbench

C++ benchmarks:

-Qprof\_gen(pass 1) -Qprof\_use(pass 2) -fast -Qcxx\_features  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECint\_rate2006 = 56.4**

NovaScale T840 (1.86 GHz, Intel Xeon E5320)

**SPECint\_rate\_base2006 = 54.8**

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Bull SAS

**Test date:** Mar-2007  
**Hardware Availability:** Jan-2007  
**Software Availability:** Nov-2006

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/flags.20090714.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/flags.20090714.00.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 12:00:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 17 April 2007.