SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun SPARC Enterprise M9000

SPECfp®_rate2006 = 1230

SPECfp_rate_base2006 = 1160

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Apr-2007
Hardware Availability: Apr-2007
Software Availability: Jul-2007

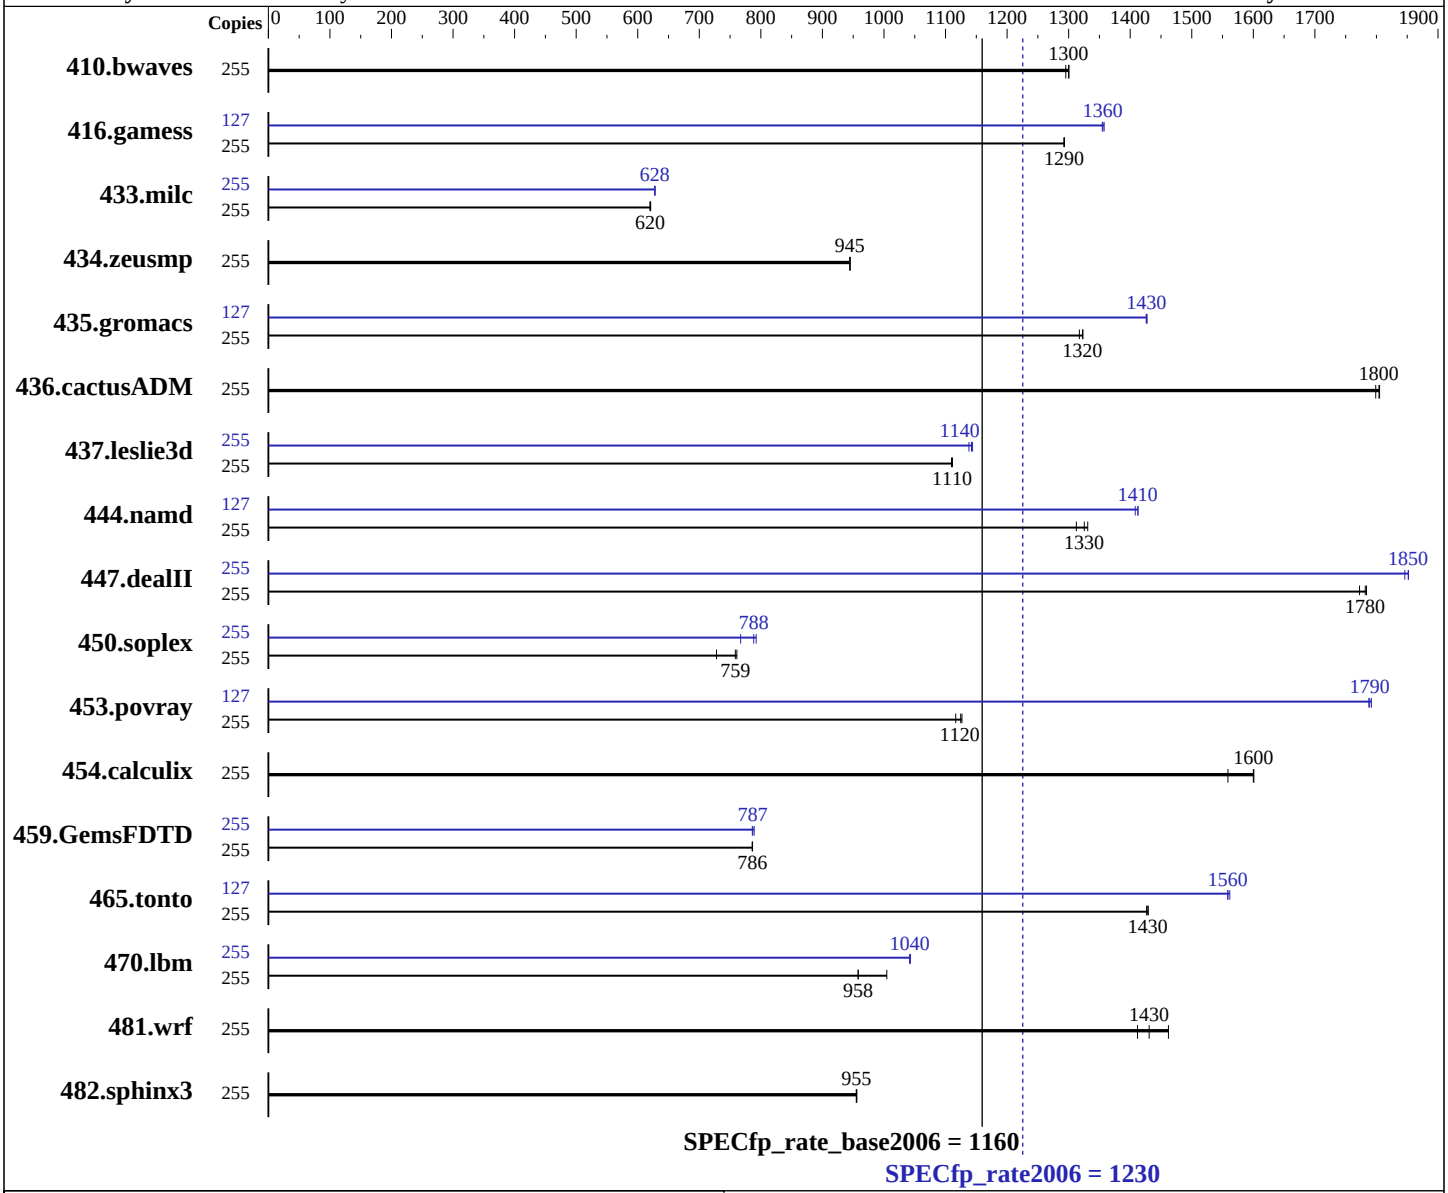

Hardware

CPU Name:	SPARC64 VI
CPU Characteristics:	
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	128 cores, 64 chips, 2 cores/chip, 2 threads/core
CPU(s) orderable:	1 to 16 CMUs; each CMU contains 2 or 4 chips
Primary Cache:	128 KB I + 128 KB D on chip per core
Secondary Cache:	6 MB I+D on chip per chip

Continued on next page

Software

Operating System:	Solaris 10 7/07 (build s10s_u4wos_03)
Compiler:	Sun Studio 12 (build 44.0)
Auto Parallel:	No
File System:	ufs
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	None

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun SPARC Enterprise M9000

SPECfp_rate2006 = 1230

SPECfp_rate_base2006 = 1160

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Apr-2007
Hardware Availability: Apr-2007
Software Availability: Jul-2007

L3 Cache: None
Other Cache: None
Memory: 1 TB (512 x 2 GB)
Disk Subsystem: 792 GB RAID 1+0 created by Solaris Volume Manager with 24 x 73 GB 10,000 RPM Fujitsu MAY2073RC SAS
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	255	2675	1300	2665	1300	**2666**	**1300**	255	2675	1300	2665	1300	**2666**	**1300**
416.gamess	255	**3862**	**1290**	3861	1290	3863	1290	127	1836	1350	**1834**	**1360**	1832	1360
433.milc	255	3769	621	3775	620	**3774**	**620**	255	3726	628	3731	627	**3729**	**628**
434.zeusmp	255	2457	945	2456	945	**2456**	**945**	255	2457	945	2456	945	**2456**	**945**
435.gromacs	255	1376	1320	1382	1320	**1376**	**1320**	127	635	1430	636	1430	**636**	**1430**
436.cactusADM	255	**1689**	**1800**	1694	1800	1688	1810	255	**1689**	**1800**	1694	1800	1688	1810
437.leslie3d	255	2157	1110	2160	1110	**2158**	**1110**	255	**2099**	**1140**	2095	1140	2106	1140
444.namd	255	1558	1310	**1543**	**1330**	1536	1330	127	723	1410	721	1410	**721**	**1410**
447.dealII	255	1635	1780	**1637**	**1780**	1646	1770	255	1580	1850	1575	1850	**1575**	**1850**
450.soplex	255	2921	728	**2804**	**759**	2794	761	255	2772	767	**2697**	**788**	2684	792
453.povray	255	**1206**	**1120**	1204	1130	1215	1120	127	378	1790	**378**	**1790**	377	1790
454.calculix	255	1350	1560	**1315**	**1600**	1314	1600	255	1350	1560	**1315**	**1600**	1314	1600
459.GemsFDTD	255	3443	786	3440	787	**3440**	**786**	255	**3438**	**787**	3428	789	3442	786
465.tonto	255	1756	1430	1759	1430	**1756**	**1430**	127	**802**	**1560**	802	1560	800	1560
470.lbm	255	3488	1000	**3656**	**958**	3658	958	255	3359	1040	**3363**	**1040**	3363	1040
481.wrf	255	2017	1410	1948	1460	**1991**	**1430**	255	2017	1410	1948	1460	**1991**	**1430**
482.sphinx3	255	5199	956	5204	955	**5202**	**955**	255	5199	956	5204	955	**5202**	**955**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Processes were bound to cores using "submit" and "pbind".
The SPEC toolset was bound to processor 0.

These shell commands request use of local 4MB pages:
      export LD_PRELOAD=madv.so.1:mpss.so.1
      export MPSSHEAP=4MB
      export MPSSSTACK=4MB
      export MADV=access_lwp
'access_lwp' means that the next light weight
process to touch the specified address range
will access it the most heavily.
```

Continued on next page

Operating System Notes (Continued)

```
ulimit -s 131072 was used to limit the space
consumed by the stack (and therefore make more
space available to the heap).

 /etc/system parameters
    autoup=300
       Causes pages older than the listed number of seconds to
       be written by fsflush.
    bufhwm=3000
       Memory byte limit for caching I/O buffers
    segmap_percent=1
       Set maximum percent memory for file system cache
    tune_t_fsflushr=3
       Controls how many seconds elapse between runs of the
       page flush daemon, fsflush.

 The "webconsole" service was turned off using
     svcadm disable webconsole
```

Platform Notes

```
"CMU" = CPU/Memory Unit; each holds 2 or 4 CPU chips.

Memory is 8-way interleaved by filling all slots with
the same capacity DIMMs.

This result was measured using a Sun SPARC Enterprise
M9000 Server.  Note that the Fujitsu SPARC Enterprise
M9000 and Sun SPARC Enterprise M9000 are electrically
equivalent.
```

Base Compiler Invocation

C benchmarks:
```
cc
```

C++ benchmarks:
```
CC
```

Fortran benchmarks:
```
f90
```

Benchmarks using both Fortran and C:
```
cc f90
```

Base Optimization Flags

C benchmarks:
```
-fast -fma=fused -xcache=128/64/2:6144/256/12 -xipo=2 -xpagesize=4M
-xprefetch_level=2 -xprefetch=latx:2 -xalias_level=std
-xprefetch_level=3 -xprefetch_auto_type=indirect_array_access
```

C++ benchmarks:
```
-xdepend -library=stlport4 -fast -fma=fused
-xcache=128/64/2:6144/256/12 -xipo=2 -xpagesize=4M -xprefetch_level=2
-xprefetch=latx:2 -xalias_level=compatible
```

Fortran benchmarks:
```
-fast -fma=fused -xcache=128/64/2:6144/256/12 -xipo=2 -xpagesize=4M
-xprefetch_level=2 -xprefetch=latx:2
```

Benchmarks using both Fortran and C:
```
-fast(cc) -fast(f90) -fma=fused -xcache=128/64/2:6144/256/12 -xipo=2
-xpagesize=4M -xprefetch_level=2 -xprefetch=latx:2 -xalias_level=std
-xprefetch_level=3 -xprefetch_auto_type=indirect_array_access
```

Base Other Flags

C benchmarks:
```
-xjobs=24 -V -#
```

C++ benchmarks:
```
-xjobs=24 -verbose=diags,version
```

Fortran benchmarks:
```
-xjobs=24 -V -v
```

Benchmarks using both Fortran and C:
```
-xjobs=24 -V -# -v
```

Peak Compiler Invocation

C benchmarks:
```
cc
```

C++ benchmarks:
```
CC
```

Fortran benchmarks:
```
f90
```

Benchmarks using both Fortran and C:
```
cc f90
```

Peak Optimization Flags

C benchmarks:

433.milc: `-fast -xcache=128/64/2:6144/256/12 -xpagesize=4M -xipo=2 -xprefetch_level=2 -fsimple=1 -xprefetch_auto_type=indirect_array_access -W2,-Ainline:rs=400 -xalias_level=std -fma=fused -xprefetch=latx:3`

470.lbm: `-xprofile=collect:./feedback`(pass 1) `-xprofile=use:./feedback`(pass 2) `-fast -xcache=128/64/2:6144/256/12 -xpagesize=4M -xprefetch_level=3 -xipo=2 -xrestrict -fma=fused -Wc,-Qlp=1 -Wc,-Qlp-av=512 -Wc,-Qlp-t=1 -Wc,-Qlp-fa=1 -Wc,-Qms_pipe-prefolim=64 -xprefetch=latx:5`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `-xdepend -library=stlport4 -fast -xcache=128/64/2:6144/256/12 -xpagesize=4M -xalias_level=compatible -xprefetch_level=1 -fma=fused -xprefetch=latx:3`

447.dealII: `-xdepend -library=stlport4 -xprofile=collect:./feedback`(pass 1) `-xprofile=use:./feedback`(pass 2) `-fast -xcache=128/64/2:6144/256/12 -xpagesize=4M -xalias_level=compatible -xipo=2 -xrestrict -fma=fused -xprefetch=latx:4.5`

450.soplex: `-xdepend -library=stlport4 -xprofile=collect:./feedback`(pass 1) `-xprofile=use:./feedback`(pass 2) `-fast -xcache=128/64/2:6144/256/12 -xpagesize=4M -xalias_level=compatible -xipo=2 -xprefetch_level=2 -fsimple=0 -xrestrict -xprefetch_auto_type=indirect_array_access -Qoption cg -Qlp-ol=1 -Qoption cg -Qlp-it=3 -Qoption cg -Qlp-imb=1 -Qoption iropt -Apf:pdl=3`

453.povray: `-xdepend -library=stlport4 -xprofile=collect:./feedback`(pass 1) `-xprofile=use:./feedback`(pass 2) `-fast -xcache=128/64/2:6144/256/12 -xpagesize=4M -xalias_level=compatible -xipo=2 -xrestrict -fma=fused`

Fortran benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -fast -xcache=128/64/2:6144/256/12 -xpagesize=4M -xipo=2
-xprefetch_level=2 -fma=fused

434.zeusmp: basepeak = yes

437.leslie3d: -fast -xcache=128/64/2:6144/256/12 -xpagesize=4M
-xprefetch_level=3 -qoption cg -Qlp=1 -qoption cg -Qlp-fa=0
-qoption cg -Qlp-fl=1 -qoption cg -Qlp-av=448
-qoption cg -Qlp-t=4 -xprefetch=latx:3.5

459.GemsFDTD: -fast -xcache=128/64/2:6144/256/12 -xpagesize=4M -fsimple=1
-xprefetch_level=2 -fma=fused -xprefetch=latx:2

465.tonto: -fast -xcache=128/64/2:6144/256/12 -xpagesize=4M -xipo=2
-xprefetch=latx:12 -lfast

Benchmarks using both Fortran and C:

435.gromacs: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xcache=128/64/2:6144/256/12 -xpagesize=4M -xipo=2
-xinline= -xarch=generic -xchip=generic -fsimple=0
-fma=fused

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

Peak Other Flags

C benchmarks:
-xjobs=24 -V -#

C++ benchmarks:
-xjobs=24 -verbose=diags,version

Fortran benchmarks:
-xjobs=24 -V -v

Benchmarks using both Fortran and C:
-xjobs=24 -V -# -v

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12.20090714.02.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12.20090714.02.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 11:28:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 May 2007.