SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460
(Intel Xeon processor E5335,2.00GHz)

SPECfp®_rate2006 = 51.2

SPECfp_rate_base2006 = 50.5

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Apr-2007
Hardware Availability: Mar-2007
Software Availability: Dec-2006

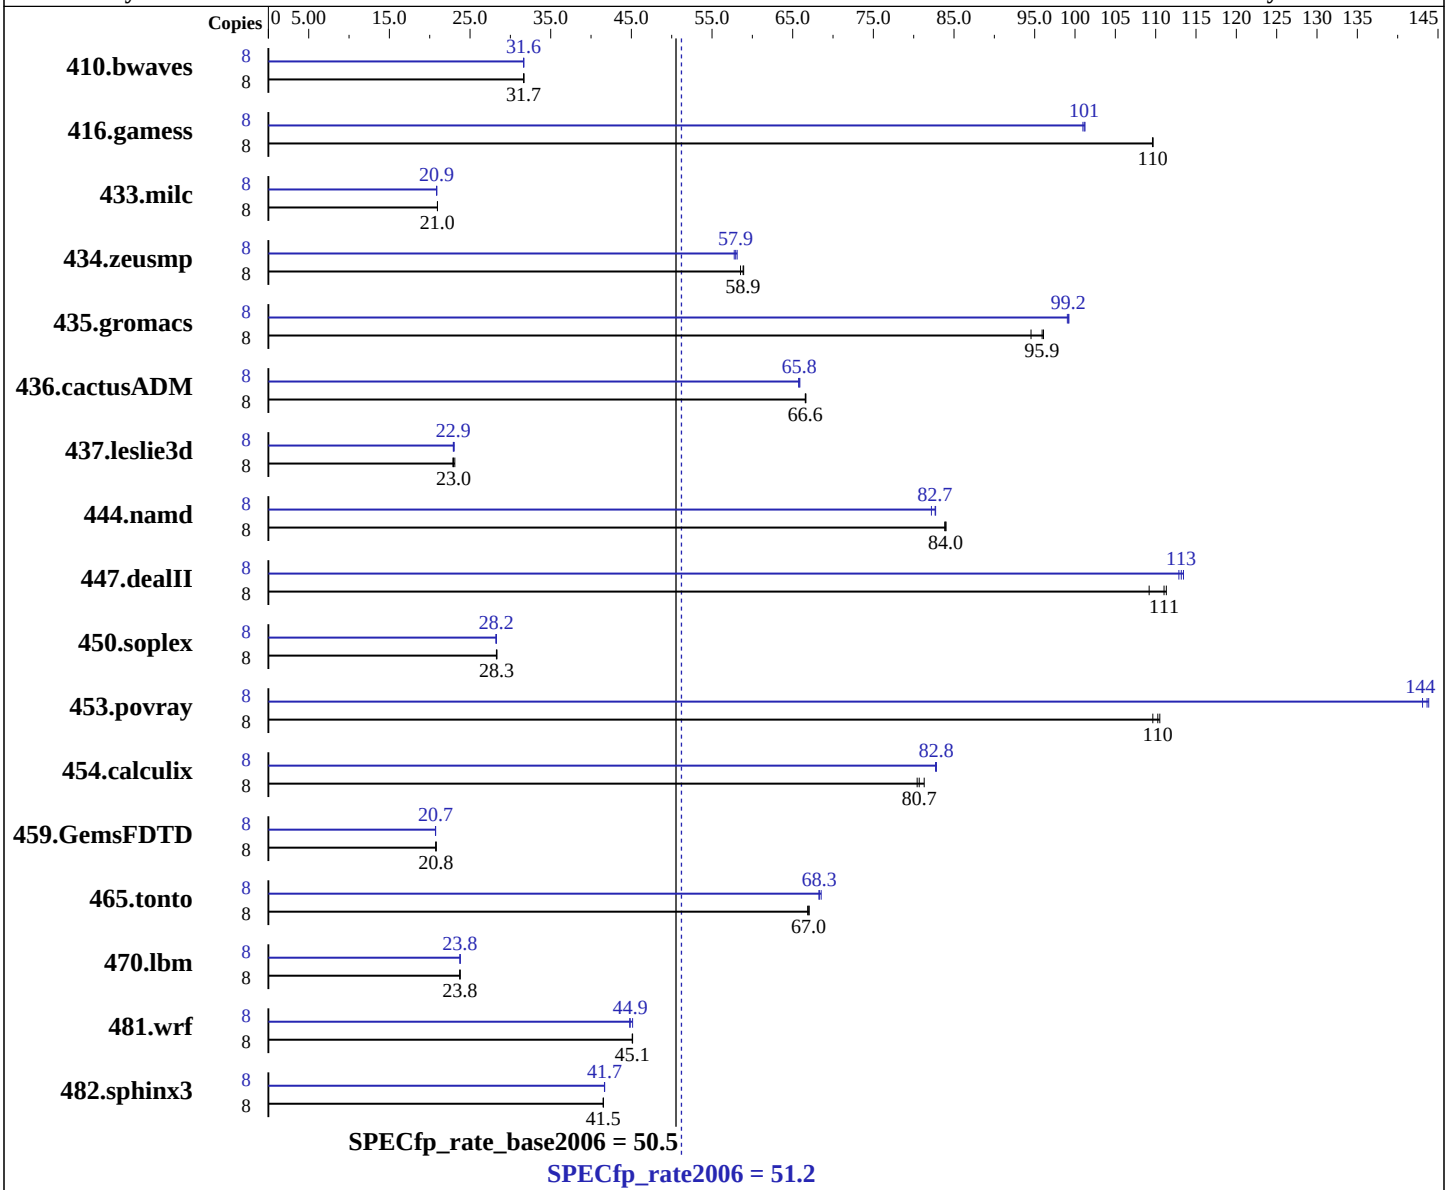

Hardware

CPU Name:	Intel Xeon E5335
CPU Characteristics:	2.0GHz, 2x4 MB L2 shared, 1333 MHz system bus
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1 to 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System:	SuSE Linux Enterprise Server 10 (EM64T) kernel 2.6.16.21-0.8-smp
Compiler:	Intel C++ Compiler for Intel EM64T-based applications, Version 9.1 Package ID l_cc_c_9.1.045 Build no 20061101 Intel Fortran Compiler for Intel EM64T-based applications, Version 9.1 Package ID l_fc_c_9.1.040 Build no 20061101
Auto Parallel:	No

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460
(Intel Xeon processor E5335,2.00GHz)

SPECfp_rate2006 = 51.2

SPECfp_rate_base2006 = 50.5

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Apr-2007
Hardware Availability: Mar-2007
Software Availability: Dec-2006

L3 Cache: None
Other Cache: None
Memory: 24 GB (2GB DIMMx12, FB-DIMM PC2-5300F ECC CL5)
Disk Subsystem: 73 GB SAS, 10000RPM
Other Hardware: None

File System: ext2
System State: Multi-user, run level 3
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3435	31.6	**3434**	**31.7**	3433	31.7	8	3436	31.6	3433	31.7	**3436**	**31.6**
416.gamess	8	1429	110	1428	110	**1429**	**110**	8	1551	101	**1549**	**101**	1547	101
433.milc	8	3503	21.0	3504	21.0	**3504**	**21.0**	8	3523	20.8	**3520**	**20.9**	3518	20.9
434.zeusmp	8	1236	58.9	1244	58.5	**1237**	**58.9**	8	1253	58.1	1261	57.8	**1257**	**57.9**
435.gromacs	8	594	96.1	**595**	**95.9**	604	94.5	8	577	99.1	576	99.2	**576**	**99.2**
436.cactusADM	8	**1436**	**66.6**	1435	66.6	1436	66.6	8	1454	65.7	**1453**	**65.8**	1451	65.9
437.leslie3d	8	3254	23.1	**3277**	**23.0**	3287	22.9	8	**3277**	**22.9**	3280	22.9	3264	23.0
444.namd	8	765	83.8	764	84.0	**764**	**84.0**	8	781	82.2	776	82.7	**776**	**82.7**
447.dealII	8	**824**	**111**	838	109	822	111	8	811	113	807	113	**809**	**113**
450.soplex	8	2356	28.3	2360	28.3	**2356**	**28.3**	8	2360	28.3	**2362**	**28.2**	2365	28.2
453.povray	8	388	110	**386**	**110**	385	111	8	297	143	**296**	**144**	296	144
454.calculix	8	821	80.4	812	81.3	**818**	**80.7**	8	797	82.8	**797**	**82.8**	798	82.7
459.GemsFDTD	8	4091	20.7	**4084**	**20.8**	4080	20.8	8	**4095**	**20.7**	4098	20.7	4095	20.7
465.tonto	8	**1175**	**67.0**	1178	66.9	1174	67.0	8	1149	68.5	1153	68.3	**1152**	**68.3**
470.lbm	8	4625	23.8	4634	23.7	**4625**	**23.8**	8	**4624**	**23.8**	4626	23.8	4624	23.8
481.wrf	8	1979	45.2	1981	45.1	**1980**	**45.1**	8	**1992**	**44.9**	1995	44.8	1979	45.2
482.sphinx3	8	3756	41.5	3753	41.5	**3755**	**41.5**	8	3740	41.7	**3741**	**41.7**	3742	41.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Environment stack size set to 'unlimited'
```

General Notes

```
The NovaScale R440 and the NovaScale R460 models are
electronically equivalent.
The results have been measured on a NovaScale R440 model.
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

Peak Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:
-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32

C++ benchmarks:
-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32

Fortran benchmarks:
-prof_gen(pass 1) -prof_use(pass 2) -fast

Benchmarks using both Fortran and C:
-prof_gen(pass 1) -prof_use(pass 2) -fast -auto_ilp32

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/EM64T_Intel91_flags.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/EM64T_Intel91_flags.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 12:17:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 May 2007.