SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX300 S3, Intel Xeon processor E5320, 1.86 GHz

SPECint®_rate2006 = 68.6

SPECint_rate_base2006 = 65.2

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Apr-2007
Hardware Availability: Nov-2006
Software Availability: Feb-2007

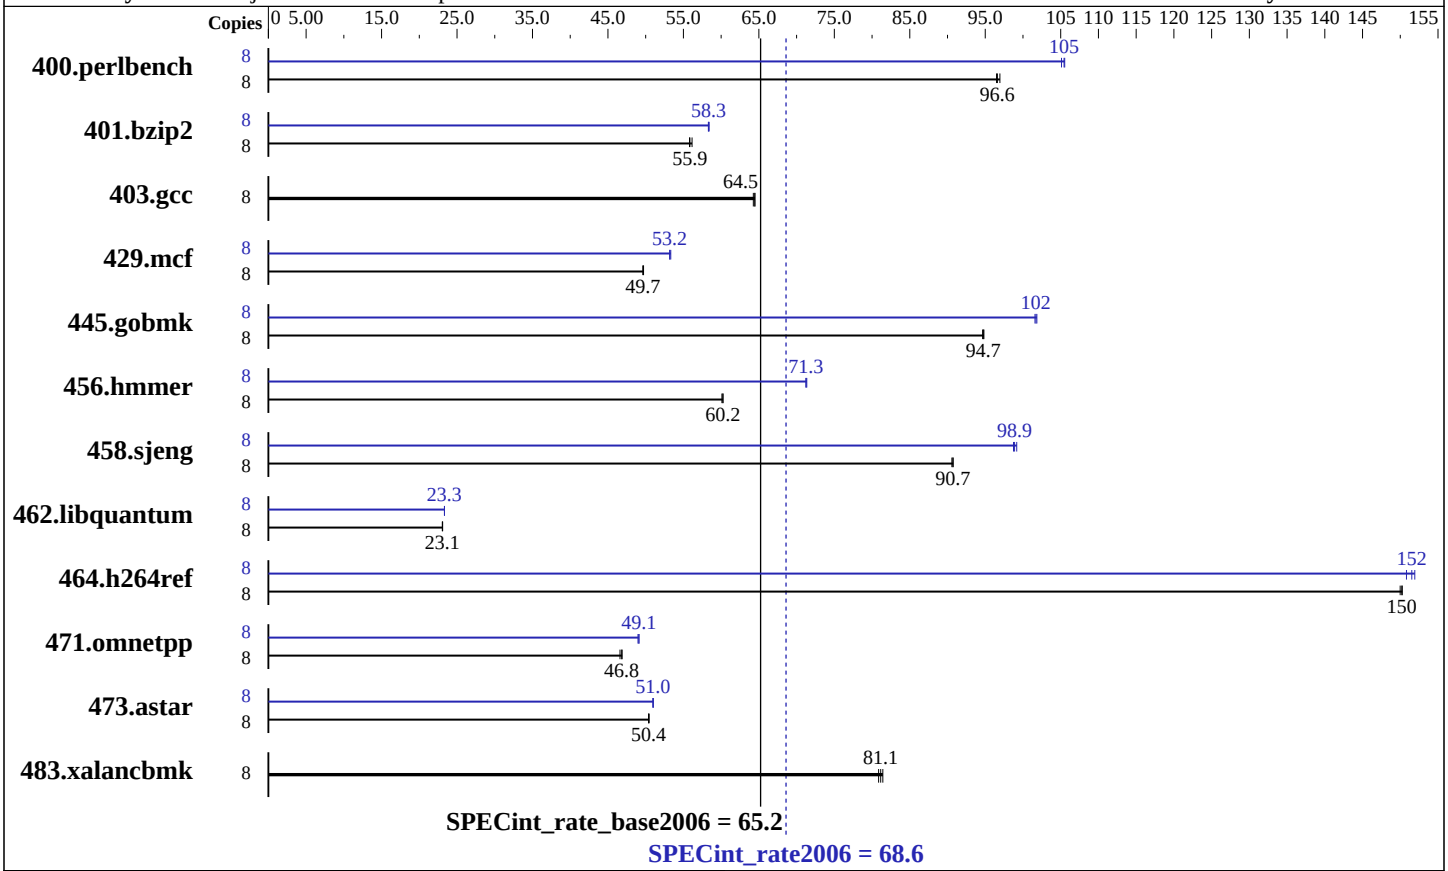

Hardware

CPU Name:	Intel Xeon E5320
CPU Characteristics:	1067 MHz system bus
CPU MHz:	1867
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8x2 GB DDR2 PC2-5300F, 2 rank, CAS 5-5-5, with ECC)
Disk Subsystem:	SAS (73GB 15400 rpm)
Other Hardware:	None

Software

Operating System:	64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp on an x86_64
Compiler:	Intel C++ Compiler for IA32/EM64T application, Version 9.1 - Build 20070215, Package-ID: l_cc_p_9.1.047
Auto Parallel:	No
File System:	ext2
System State:	Multiuser, Runlevel 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Smart Heap Library, Version 8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX300 S3, Intel Xeon processor E5320, 1.86 GHz

SPECint_rate2006 = 68.6

SPECint_rate_base2006 = 65.2

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Apr-2007
Hardware Availability: Nov-2006
Software Availability: Feb-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	806	96.9	810	96.5	**809**	**96.6**	8	744	105	**741**	**105**	741	106
401.bzip2	8	1375	56.1	1383	55.8	**1382**	**55.9**	8	1322	58.4	**1323**	**58.3**	1324	58.3
403.gcc	8	999	64.5	**999**	**64.5**	1002	64.3	8	999	64.5	**999**	**64.5**	1002	64.3
429.mcf	8	**1469**	**49.7**	1470	49.6	1467	49.7	8	1368	53.3	**1372**	**53.2**	1372	53.2
445.gobmk	8	885	94.8	887	94.7	**886**	**94.7**	8	826	102	824	102	**825**	**102**
456.hmmer	8	**1239**	**60.2**	1242	60.1	1239	60.2	8	**1047**	**71.3**	1046	71.4	1048	71.2
458.sjeng	8	**1067**	**90.7**	1067	90.7	1069	90.6	8	**979**	**98.9**	980	98.7	976	99.2
462.libquantum	8	7177	23.1	7188	23.1	**7187**	**23.1**	8	7104	23.3	**7103**	**23.3**	7103	23.3
464.h264ref	8	1180	150	**1179**	**150**	1178	150	8	**1168**	**152**	1174	151	1165	152
471.omnetpp	8	1067	46.9	**1068**	**46.8**	1073	46.6	8	1018	49.1	**1018**	**49.1**	1021	49.0
473.astar	8	**1114**	**50.4**	1115	50.4	1113	50.5	8	**1101**	**51.0**	1101	51.0	1102	51.0
483.xalancbmk	8	678	81.4	**680**	**81.1**	683	80.9	8	678	81.4	**680**	**81.1**	683	80.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
''/usr/bin/taskset' used to bind processes to CPUs
```

General Notes

```
The system bus runs at 1067 MHz

All binaries were built with 32-bit Intel compiler except:
401.bzip2, 456.hmmer and 462.libquantum in peak were built with
64-bit Intel compiler by changing the path for include and library files.

BIOS configuration:
Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

This result was measured on the PRIMERGY RX300 S3. The PRIMERGY RX300 S3 and
the PRIMERGY TX300 S3 are electronically equivalent.

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries
```

Base Compiler Invocation

C benchmarks:

```
icc
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_X64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-xP -O3 -ipo -no-prec-div -L/opt/SmartHeap_8_1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/cce/9.1.047/bin/icc
-I/opt/intel/cce/9.1.047/include
-L/opt/intel/cce/9.1.047/lib

456.hmmer: /opt/intel/cce/9.1.047/bin/icc
-I/opt/intel/cce/9.1.047/include
-L/opt/intel/cce/9.1.047/lib

462.libquantum: /opt/intel/cce/9.1.047/bin/icc
-I/opt/intel/cce/9.1.047/include
-L/opt/intel/cce/9.1.047/lib

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64

Continued on next page

Peak Portability Flags (Continued)

456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-prof_gen`(pass 1) `-prof_use`(pass 2) `-fast`

401.bzip2: `-fast`

403.gcc: `basepeak = yes`

429.mcf: `-prof_gen`(pass 1) `-prof_use`(pass 2) `-fast` `-L/opt/SmartHeap_8_1/lib -lsmartheap`

445.gobmk: `Same as 429.mcf`

456.hmmer: `Same as 400.perlbench`

458.sjeng: `Same as 429.mcf`

462.libquantum: `Same as 400.perlbench`

464.h264ref: `Same as 429.mcf`

C++ benchmarks:

471.omnetpp: `-prof_gen`(pass 1) `-prof_use`(pass 2) `-xP -O3 -ipo -no-prec-div -L/opt/SmartHeap_8_1/lib -lsmartheap`

473.astar: `-prof_gen`(pass 1) `-prof_use`(pass 2) `-fast` `-L/opt/SmartHeap_8_1/lib -lsmartheap`

483.xalancbmk: `basepeak = yes`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.xml`

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX300 S3, Intel Xeon processor E5320, 1.86 GHz

SPECint_rate2006 = 68.6

SPECint_rate_base2006 = 65.2

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Apr-2007
Hardware Availability: Nov-2006
Software Availability: Feb-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 12:16:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 May 2007.