SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX300 S3, Intel Xeon processor 5160, 3.0 GHz

SPECint®_rate2006 = 59.1

SPECint_rate_base2006 = 56.3

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: May-2007
Hardware Availability: Jul-2006
Software Availability: Feb-2007

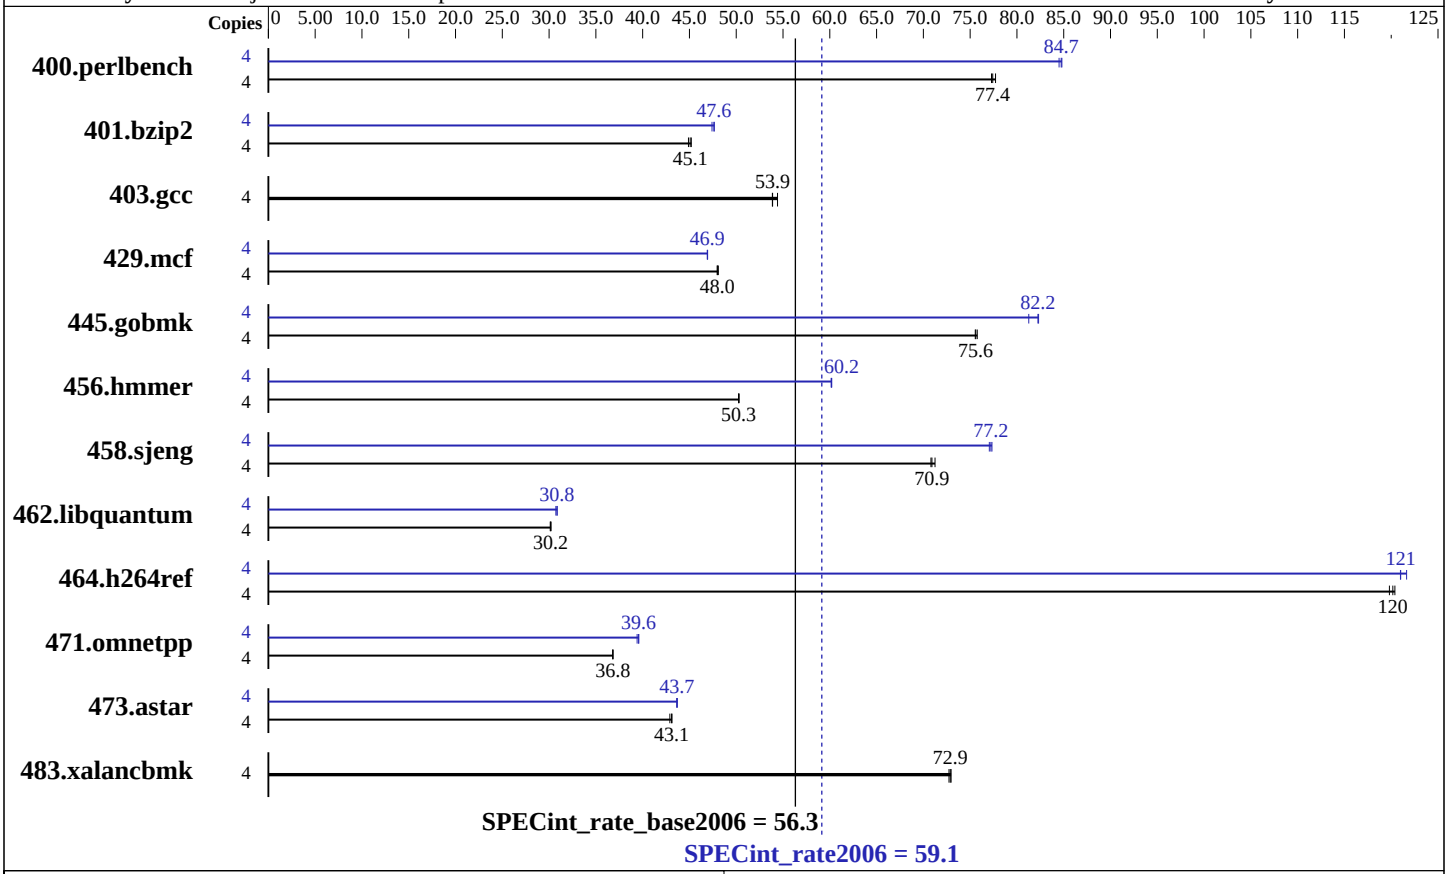

Hardware

CPU Name:	Intel Xeon 5160
CPU Characteristics:	1333 MHz system bus
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	8 GB (8x1 GB DDR2 PC2-5300F, 2 rank, CAS 5-5-5, with ECC)
Disk Subsystem:	SAS (73GB 15400 rpm)
Other Hardware:	None

Software

Operating System:	64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp on an x86_64
Compiler:	Intel C++ Compiler for IA32/EM64T application, Version 9.1 - Build 20070215, Package-ID: l_cc_p_9.1.047
Auto Parallel:	No
File System:	ext2
System State:	Multiuser, Runlevel 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Smart Heap Library, Version 8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX300 S3, Intel Xeon processor 5160, 3.0 GHz

SPECint_rate2006 = 59.1

SPECint_rate_base2006 = 56.3

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: May-2007
Hardware Availability: Jul-2006
Software Availability: Feb-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	**505**	**77.4**	506	77.3	503	77.7	4	462	84.5	**461**	**84.7**	461	84.8
401.bzip2	4	854	45.2	860	44.9	**856**	**45.1**	4	814	47.4	**811**	**47.6**	810	47.7
403.gcc	4	**598**	**53.9**	592	54.4	598	53.9	4	**598**	**53.9**	592	54.4	598	53.9
429.mcf	4	760	48.0	**760**	**48.0**	759	48.1	4	778	46.9	**778**	**46.9**	777	46.9
445.gobmk	4	555	75.5	554	75.8	**555**	**75.6**	4	510	82.3	516	81.3	**510**	**82.2**
456.hmmer	4	743	50.2	**742**	**50.3**	742	50.3	4	620	60.2	621	60.1	**620**	**60.2**
458.sjeng	4	684	70.8	679	71.2	**682**	**70.9**	4	628	77.0	626	77.3	**627**	**77.2**
462.libquantum	4	**2748**	**30.2**	2751	30.1	2743	30.2	4	2685	30.9	**2687**	**30.8**	2698	30.7
464.h264ref	4	739	120	**737**	**120**	735	120	4	728	122	732	121	**731**	**121**
471.omnetpp	4	**679**	**36.8**	679	36.8	679	36.8	4	632	39.6	634	39.4	**632**	**39.6**
473.astar	4	**652**	**43.1**	651	43.1	654	42.9	4	643	43.7	**643**	**43.7**	643	43.7
483.xalancbmk	4	378	73.0	**379**	**72.9**	379	72.7	4	378	73.0	**379**	**72.9**	379	72.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
''/usr/bin/taskset' used to bind processes to CPUs
```

General Notes

```
The system bus runs at 1333 MHz

All binaries were built with 32-bit Intel compiler except:
401.bzip2, 456.hmmer and 462.libquantum in peak were built with
64-bit Intel compiler by changing the path for include and library files.

BIOS configuration:
Adjacent Sector Prefetch = Disable

This result was measured on the PRIMERGY RX300 S3. The PRIMERGY RX300 S3 and
the PRIMERGY TX300 S3 are electronically equivalent.

For information about Fujitsu Siemens Computers in your country please see:
http://www.fujitsu-siemens.com/countries
```

Base Compiler Invocation

C benchmarks:

```
icc
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_X64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-xP -O3 -ipo -no-prec-div -L/opt/SmartHeap_8_1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/cce/9.1.047/bin/icc
-I/opt/intel/cce/9.1.047/include
-L/opt/intel/cce/9.1.047/lib

456.hmmer: /opt/intel/cce/9.1.047/bin/icc
-I/opt/intel/cce/9.1.047/include
-L/opt/intel/cce/9.1.047/lib

462.libquantum: /opt/intel/cce/9.1.047/bin/icc
-I/opt/intel/cce/9.1.047/include
-L/opt/intel/cce/9.1.047/lib

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64

Continued on next page

Peak Portability Flags (Continued)

456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-prof_gen`(pass 1) `-prof_use`(pass 2) `-fast`

401.bzip2: `-fast`

403.gcc: `basepeak = yes`

429.mcf: `-prof_gen`(pass 1) `-prof_use`(pass 2) `-fast` `-L/opt/SmartHeap_8_1/lib -lsmartheap`

445.gobmk: `Same as 429.mcf`

456.hmmer: `Same as 400.perlbench`

458.sjeng: `Same as 429.mcf`

462.libquantum: `Same as 400.perlbench`

464.h264ref: `Same as 429.mcf`

C++ benchmarks:

471.omnetpp: `-prof_gen`(pass 1) `-prof_use`(pass 2) `-xP -O3 -ipo -no-prec-div -L/opt/SmartHeap_8_1/lib -lsmartheap`

473.astar: `-prof_gen`(pass 1) `-prof_use`(pass 2) `-fast` `-L/opt/SmartHeap_8_1/lib -lsmartheap`

483.xalancbmk: `basepeak = yes`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.09.xml`

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX300 S3, Intel Xeon processor 5160, 3.0 GHz

SPECint_rate2006 = 59.1

SPECint_rate_base2006 = 56.3

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: May-2007
Hardware Availability: Jul-2006
Software Availability: Feb-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 11:47:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 May 2007.