SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System p 570 (4.7 GHz, 16 core)

SPECfp®_rate2006 = 426

SPECfp_rate_base2006 = 379

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: May-2007
Hardware Availability: Jun-2007
Software Availability: Jun-2007

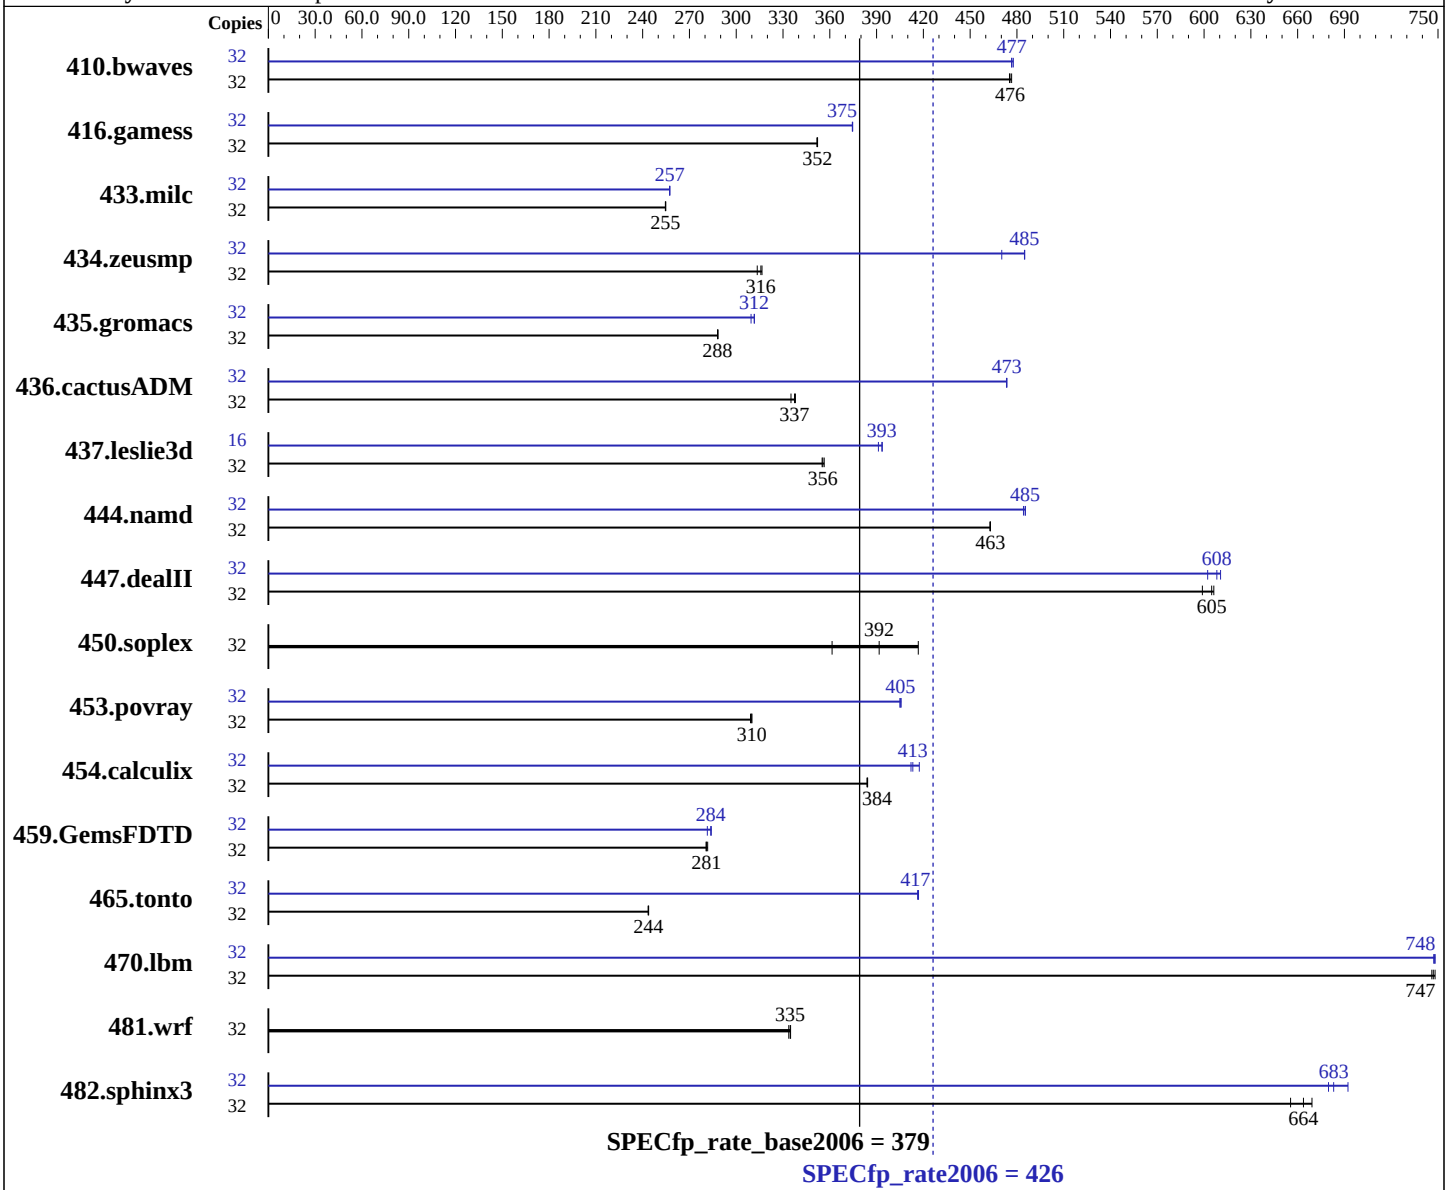

Hardware

CPU Name:	POWER6
CPU Characteristics:	
CPU MHz:	4700
FPU:	Integrated
CPU(s) enabled:	16 cores, 8 chips, 2 cores/chip, 2 threads/core
CPU(s) orderable:	2,4,8,12,16 cores
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per core

Continued on next page

Software

Operating System:	IBM AIX 5L V5.3
Compiler:	XL C/C++ Enterprise Edition Version 9.0 for AIX XL Fortran Enterprise Edition Version 11.1 for AIX
Auto Parallel:	No
File System:	AIX/JFS2
System State:	Multi-user
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	--

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System p 570 (4.7 GHz, 16 core)

SPECfp_rate2006 = 426

SPECfp_rate_base2006 = 379

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: May-2007
Hardware Availability: Jun-2007
Software Availability: Jun-2007

L3 Cache: 32 MB I+D off chip per chip
Other Cache: None
Memory: 128 GB (64x2 GB) DDR2 667 MHz
Disk Subsystem: 2x73 GB 2x146 GB SAS 15K RPM
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	912	477	**914**	**476**	915	475	32	913	477	**912**	**477**	910	478
416.gamess	32	**1779**	**352**	1779	352	1781	352	32	**1673**	**375**	1673	374	1672	375
433.milc	32	1154	255	**1153**	**255**	1153	255	32	**1142**	**257**	1141	257	1142	257
434.zeusmp	32	929	313	**922**	**316**	920	317	32	**601**	**485**	600	485	619	470
435.gromacs	32	792	288	793	288	**793**	**288**	32	738	310	**733**	**312**	733	312
436.cactusADM	32	1131	338	**1133**	**337**	1141	335	32	**808**	**473**	808	474	808	473
437.leslie3d	32	844	356	847	355	**846**	**356**	16	382	394	**382**	**393**	384	391
444.namd	32	554	463	555	463	**554**	**463**	32	529	485	530	484	**529**	**485**
447.dealII	32	604	606	611	599	**605**	**605**	32	608	602	600	611	**602**	**608**
450.soplex	32	**681**	**392**	738	361	640	417	32	**681**	**392**	738	361	640	417
453.povray	32	**549**	**310**	549	310	551	309	32	**420**	**405**	420	406	420	405
454.calculix	32	**687**	**384**	687	384	688	384	32	**639**	**413**	632	417	641	412
459.GemsFDTD	32	1210	281	1205	282	**1208**	**281**	32	1206	281	**1197**	**284**	1195	284
465.tonto	32	1293	243	1291	244	**1292**	**244**	32	756	416	**756**	**417**	755	417
470.lbm	32	589	746	**589**	**747**	588	748	32	**588**	**748**	588	747	588	748
481.wrf	32	1071	334	1067	335	**1068**	**335**	32	1071	334	1067	335	**1068**	**335**
482.sphinx3	32	**940**	**664**	952	655	932	669	32	917	680	**913**	**683**	901	692

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
AIX 5L V5.3 updated with the 5300-06 Technology Level.
See flags file for details on following settings.
all ulimits set to unlimited
Envionment variables set before executing benchmarks:
  MALLOCOPTIONS=pool
  MEMORY_AFFINITY=MCM
  XLFRTEOPTS=intrinthds=1
System set to "Enhanced" mode when defining partition on HMC
6144 pages of size 16M defined on systems with vmo command
fdpr binary optimization tool used for peak versions of
  410.bwaves 434.zeusmp 453.povray 470.lbm 482.sphinx3
submit used to bind benchmark to a processor using "bindprocessor"
The "IBM System p 570" and "IBM System i 570" are electronically equivalent.
The results have been measured on the "IBM System p 570" model.
```

Base Compiler Invocation

C benchmarks:
```
/usr/vac/bin/xlc -qlanglvl=extc99
```

C++ benchmarks:
```
/usr/vacpp/bin/xlC
```

Fortran benchmarks:
```
/usr/bin/xlf95
```

Benchmarks using both Fortran and C:
```
/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95
```

Base Portability Flags

410.bwaves: `-qfixed`
416.gamess: `-qfixed`
434.zeusmp: `-qfixed`
435.gromacs: `-qfixed -qextname`
436.cactusADM: `-qfixed -qextname`
437.leslie3d: `-qfixed`
454.calculix: `-qfixed -qextname`
481.wrf: `-DSPEC_CPU_AIX -DNOUNDERSCORE`
482.sphinx3: `-qchars=signed`

Base Optimization Flags

C benchmarks:
```
-bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS -blpdata
```

C++ benchmarks:
```
-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all
-D__IBM_FAST_VECTOR -blpdata
```

Fortran benchmarks:
```
-bmaxdata:0x60000000 -O5 -qlargepage -qsmallstack=dynlenonheap
-qalias=nostd -blpdata
```

Benchmarks using both Fortran and C:
```
-bmaxdata:0x60000000 -O5 -qlargepage -D_ILS_MACROS
-qsmallstack=dynlenonheap -qalias=nostd -blpdata
```

Base Other Flags

C benchmarks:
```
-qipa=noobject -qipa=threads -qsuppress=1500-036
```

C++ benchmarks:
```
-qipa=noobject -qipa=threads -qsuppress=1500-036
```

Fortran benchmarks:
```
-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036
```

Benchmarks using both Fortran and C:
```
-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036
```

Peak Compiler Invocation

C benchmarks:
```
/usr/vac/bin/xlc -qlanglvl=extc99
```

C++ benchmarks:
```
/usr/vacpp/bin/xlC
```

Fortran benchmarks:
```
/usr/bin/xlf95
```

Benchmarks using both Fortran and C:
```
/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95
```

Peak Portability Flags

410.bwaves: `-qfixed`
416.gamess: `-qfixed`
434.zeusmp: `-qfixed`
435.gromacs: `-qfixed -qextname`
436.cactusADM: `-qfixed -qextname`
437.leslie3d: `-qfixed`
454.calculix: `-qfixed -qextname`
481.wrf: `-DSPEC_CPU_AIX -DNOUNDERSCORE`
482.sphinx3: `-qchars=signed`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

433.milc: -bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS -qalign=natural -blpdata

470.lbm: -O5 -qlargepage -D_ILS_MACROS -q64 -blpdata

482.sphinx3: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -blpdata

C++ benchmarks:

444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -blpdata

447.dealII: -bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all -D__IBM_FAST_VECTOR -blpdata

450.soplex: basepeak = yes

453.povray: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -qalign=natural -blpdata

Fortran benchmarks:

410.bwaves: -bmaxdata:0x50000000 -O5 -qlargepage -qenablevmx -qvecnvol -qsmallstack=dynlenonheap -blpdata

416.gamess: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qalias=nostd -blpdata

434.zeusmp: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx -qvecnvol -qxlf90=nosignedzero -blpdata

437.leslie3d: -O5 -qlargepage -q64 -blpdata

459.GemsFDTD: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx -qvecnvol -blpdata

465.tonto: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -blpdata

Benchmarks using both Fortran and C:

435.gromacs: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -blpdata

436.cactusADM: -bmaxdata:0x60000000 -D_ILS_MACROS -blpdata

454.calculix: -O4 -qlargepage -q64 -D_ILS_MACROS -blpdata

Continued on next page

Peak Optimization Flags (Continued)

481.wrf: `basepeak = yes`

Peak Other Flags

C benchmarks:
```
-qipa=noobject -qipa=threads -qsuppress=1500-036
```

C++ benchmarks:
```
-qipa=noobject -qipa=threads -qsuppress=1500-036
```

Fortran benchmarks:
```
-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036
```

Benchmarks using both Fortran and C:
```
-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036
```

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 11:07:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 June 2007.