SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440
(Intel Xeon processor 5120,1.86GHz)

SPECint®_rate2006 = 37.6

SPECint_rate_base2006 = 36.3

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: May-2007
Hardware Availability: Feb-2007
Software Availability: Dec-2006

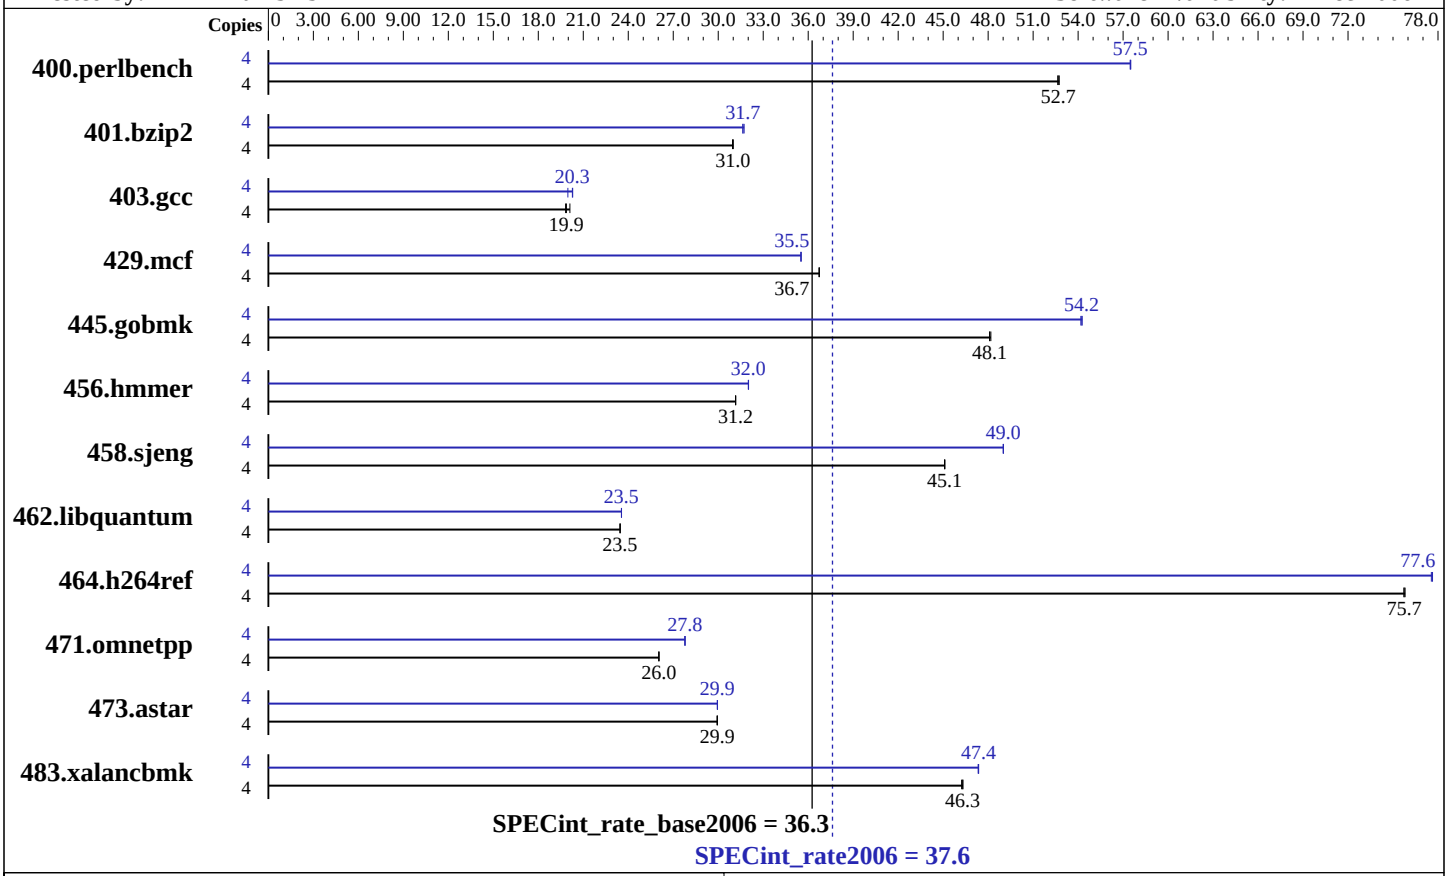

Hardware

CPU Name:	Intel Xeon 5120
CPU Characteristics:	1.86 GHz, 4 MB L2, 1066 MHz system bus
CPU MHz:	1866
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	24 GB (12x2 GB) FB-DIMM PC2-5300F ECC CL5
Disk Subsystem:	1x73 GB SAS, 15000 RPM
Other Hardware:	None

Software

Operating System:	Windows Server 2003 Enterprise Edition X64 Edition Service Pack1
Compiler:	Intel C++ Compiler for IA32 version 9.1 Package ID W_CC_C_9.1.033 Build no 20061103Z Microsoft Visual Studio .NET 2003 (lib & linker)
Auto Parallel:	No
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	MicroQuill SmartHeap Library 8.0 (shlW32M.lib)

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R440
(Intel Xeon processor 5120,1.86GHz)

SPECint_rate2006 = 37.6

SPECint_rate_base2006 = 36.3

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: May-2007
Hardware Availability: Feb-2007
Software Availability: Dec-2006

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	742	52.6	**742**	**52.7**	741	52.7	4	680	57.5	680	57.5	**680**	**57.5**
401.bzip2	4	1247	31.0	**1246**	**31.0**	1245	31.0	4	1220	31.6	1217	31.7	**1219**	**31.7**
403.gcc	4	1601	20.1	**1620**	**19.9**	1625	19.8	4	1612	20.0	**1588**	**20.3**	1587	20.3
429.mcf	4	993	36.7	993	36.7	**993**	**36.7**	4	1027	35.5	1027	35.5	**1027**	**35.5**
445.gobmk	4	**872**	**48.1**	872	48.1	871	48.2	4	773	54.3	**774**	**54.2**	774	54.2
456.hmmer	4	**1198**	**31.2**	1198	31.2	1198	31.2	4	**1166**	**32.0**	1166	32.0	1165	32.0
458.sjeng	4	**1073**	**45.1**	1073	45.1	1073	45.1	4	**987**	**49.0**	987	49.0	988	49.0
462.libquantum	4	3533	23.5	3533	23.5	**3533**	**23.5**	4	3520	23.5	**3520**	**23.5**	3519	23.6
464.h264ref	4	1169	75.7	**1169**	**75.7**	1168	75.8	4	1140	77.6	**1141**	**77.6**	1141	77.6
471.omnetpp	4	960	26.0	960	26.0	**960**	**26.0**	4	**900**	**27.8**	900	27.8	900	27.8
473.astar	4	**938**	**29.9**	938	29.9	938	29.9	4	**938**	**29.9**	938	29.9	938	30.0
483.xalancbmk	4	597	46.2	**596**	**46.3**	596	46.3	4	583	47.3	**583**	**47.4**	583	47.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
The NovaScale R440 and the NovaScale R460 models are
electronically equivalent.
The results have been measured on a NovaScale R460 model.
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc7.1 -Qc99
```

C++ benchmarks:

```
icl -Qvc7.1
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`

Base Optimization Flags

C benchmarks:

```
-fast /F512000000 shlw32m.lib            -link /FORCE:MULTIPLE
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
-fast -Qcxx_features /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks:
icl -Qvc7.1 -Qc99

C++ benchmarks:
icl -Qvc7.1

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32

Peak Optimization Flags

C benchmarks:
-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

C++ benchmarks:
-Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx_features
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/flags.20090714.00.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/flags.20090714.00.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 11:11:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 June 2007.