



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro Motherboard H8DM3-2

SPECfp®\_rate2006 = 50.2

SPECfp\_rate\_base2006 = 47.6

CPU2006 license: 1176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Mar-2007

Hardware Availability: Jan-2007

Software Availability: Aug-2006

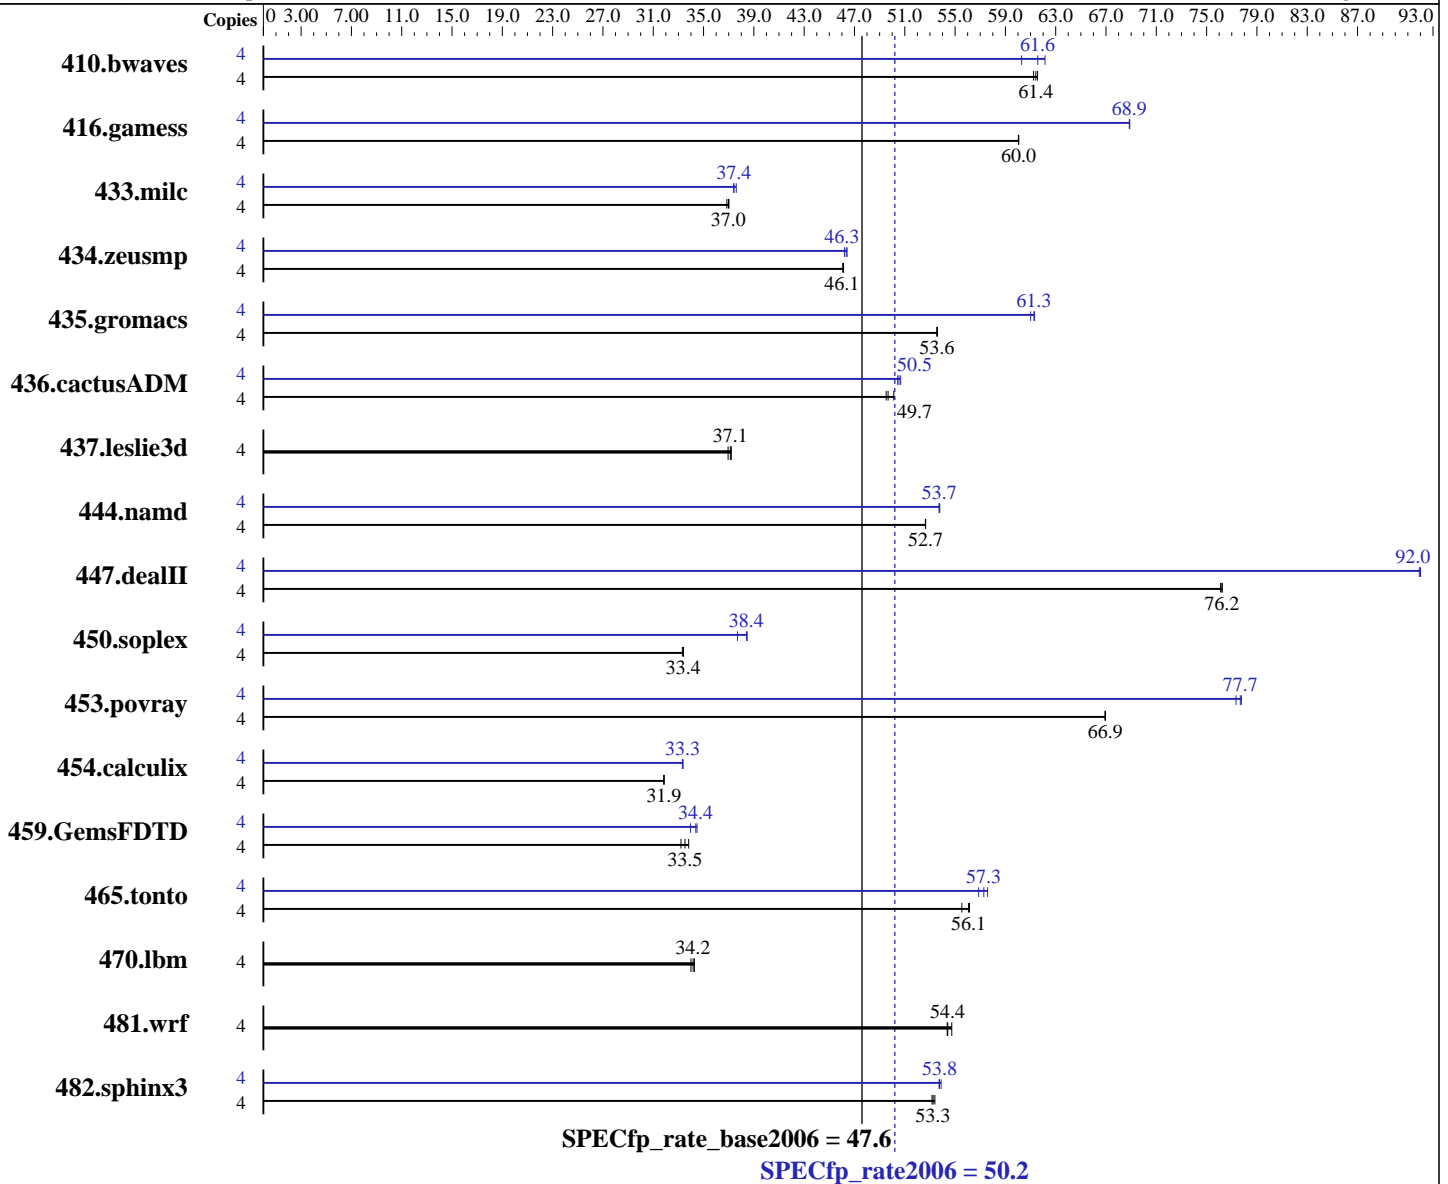

### Hardware

CPU Name: AMD Opteron 2222 SE  
 CPU Characteristics:  
 CPU MHz: 3000  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

### Software

Operating System: SuSE Linux Enterprise Server 9 SP3 64-bit kernel  
 Compiler: QLogic PathScale  
 Compiler Suite, Release 2.5  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Multi-user, run level 3  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro Motherboard H8DM3-2

SPECfp\_rate2006 = 50.2

SPECfp\_rate\_base2006 = 47.6

CPU2006 license: 1176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Mar-2007

Hardware Availability: Jan-2007

Software Availability: Aug-2006

L3 Cache: None  
Other Cache: None  
Memory: 8 GB (8x1GB, DDR2-667 CL5 ECC Reg)  
Disk Subsystem: SATA, 400 GB  
Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	883	61.6	888	61.2	<b>885</b>	<b>61.4</b>	4	<b>883</b>	<b>61.6</b>	875	62.1	902	60.3
416.gamess	4	1305	60.0	<b>1304</b>	<b>60.0</b>	1304	60.1	4	<b>1137</b>	<b>68.9</b>	1137	68.9	1137	68.9
433.milc	4	996	36.9	992	37.0	<b>993</b>	<b>37.0</b>	4	977	37.6	982	37.4	<b>981</b>	<b>37.4</b>
434.zeusmp	4	789	46.1	790	46.1	<b>789</b>	<b>46.1</b>	4	<b>785</b>	<b>46.3</b>	788	46.2	784	46.4
435.gromacs	4	<b>533</b>	<b>53.6</b>	533	53.6	533	53.6	4	<b>466</b>	<b>61.3</b>	466	61.3	468	61.0
436.cactusADM	4	954	50.1	965	49.5	<b>962</b>	<b>49.7</b>	4	948	50.4	943	50.7	<b>946</b>	<b>50.5</b>
437.leslie3d	4	<b>1013</b>	<b>37.1</b>	1011	37.2	1018	37.0	4	<b>1013</b>	<b>37.1</b>	1011	37.2	1018	37.0
444.namd	4	609	52.7	<b>609</b>	<b>52.7</b>	609	52.6	4	597	53.7	596	53.8	<b>597</b>	<b>53.7</b>
447.dealII	4	<b>600</b>	<b>76.2</b>	601	76.1	600	76.2	4	498	91.9	497	92.0	<b>497</b>	<b>92.0</b>
450.soplex	4	1001	33.3	999	33.4	<b>999</b>	<b>33.4</b>	4	885	37.7	867	38.5	<b>869</b>	<b>38.4</b>
453.povray	4	318	67.0	318	66.9	<b>318</b>	<b>66.9</b>	4	275	77.3	<b>274</b>	<b>77.7</b>	274	77.8
454.calculix	4	1036	31.9	<b>1036</b>	<b>31.9</b>	1036	31.8	4	989	33.4	<b>990</b>	<b>33.3</b>	991	33.3
459.GemsFDTD	4	1255	33.8	1278	33.2	<b>1266</b>	<b>33.5</b>	4	<b>1234</b>	<b>34.4</b>	1231	34.5	1250	34.0
465.tonto	4	701	56.1	709	55.5	<b>702</b>	<b>56.1</b>	4	684	57.6	<b>687</b>	<b>57.3</b>	692	56.9
470.lbm	4	1616	34.0	1604	34.3	<b>1608</b>	<b>34.2</b>	4	1616	34.0	1604	34.3	<b>1608</b>	<b>34.2</b>
481.wrf	4	816	54.7	<b>821</b>	<b>54.4</b>	822	54.4	4	816	54.7	<b>821</b>	<b>54.4</b>	822	54.4
482.sphinx3	4	1460	53.4	1466	53.2	<b>1464</b>	<b>53.3</b>	4	1447	53.9	<b>1450</b>	<b>53.8</b>	1451	53.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

taskset utility used to bind CPU(s) to processes

All memory slots filled on all chips

Tested systems can be used with CSE-825TQ-R700LPV case,

To ensure system stability, a 550W (minimum) ATX power supply [4-pin (+12V), 8-pin (+12V) and 24-pin are required]

Product description located as of <http://www.supermicro.com/Aplus/motherboard/Opteron2000/MCP55/H8DM3-2.cfm>

## Base Compiler Invocation

C benchmarks:  
pathcc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro  
Motherboard H8DM3-2

SPECfp\_rate2006 = 50.2

SPECfp\_rate\_base2006 = 47.6

CPU2006 license: 1176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Mar-2007  
Hardware Availability: Jan-2007  
Software Availability: Aug-2006

## Base Compiler Invocation (Continued)

C++ benchmarks:  
pathCC

Fortran benchmarks:  
pathf95

Benchmarks using both Fortran and C:  
pathcc pathf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_TABLE\_WORKAROUND  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-Ofast

C++ benchmarks:  
-Ofast

Fortran benchmarks:  
-Ofast

Benchmarks using both Fortran and C:  
-Ofast



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Supermicro  
Motherboard H8DM3-2**

**SPECfp\_rate2006 = 50.2**

**SPECfp\_rate\_base2006 = 47.6**

**CPU2006 license:** 1176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Mar-2007  
**Hardware Availability:** Jan-2007  
**Software Availability:** Aug-2006

## Base Other Flags

C benchmarks:  
-IPA:max\_jobs=2

C++ benchmarks:  
-IPA:max\_jobs=2

Fortran benchmarks:  
-IPA:max\_jobs=2

Benchmarks using both Fortran and C:  
-IPA:max\_jobs=2

## Peak Compiler Invocation

C benchmarks:  
pathcc

C++ benchmarks:  
pathCC

Fortran benchmarks:  
pathf95

Benchmarks using both Fortran and C:  
pathcc pathf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_TABLE\_WORKAROUND  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro  
Motherboard H8DM3-2

SPECfp\_rate2006 = 50.2

SPECfp\_rate\_base2006 = 47.6

CPU2006 license: 1176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Mar-2007  
Hardware Availability: Jan-2007  
Software Availability: Aug-2006

## Peak Optimization Flags

### C benchmarks:

433.milc: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

470.lbm: basepeak = yes

482.sphinx3: Same as 433.milc

### C++ benchmarks:

444.namd: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast

447.dealIII: -Ofast -m32 -fno-exceptions

450.soplex: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -m32 -O3  
-OPT:IEEE\_arith=3 -CG:load\_exe=0 -CG:movnti=1  
-LNO:minvariant=off -fno-exceptions

453.povray: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-fno-fast-math

### Fortran benchmarks:

410.bwaves: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-OPT:Ofast -OPT:IEEE\_arith=3 -LNO:blocking=off  
-LNO:ignore\_feedback=off

416.gamess: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O2  
-OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256

434.zeusmp: -Ofast -CG:local\_fwd\_sched=on -LNO:blocking=off  
-LNO:interchange=off -LNO:fu=10 -LNO:full\_unroll\_outer=on

437.leslie3d: basepeak = yes

459.GemsFDTD: -Ofast -LNO:fission=2 -LNO:prefetch=0

465.tonto: -Ofast -CG:local\_fwd\_sched=on -IPA:plimit=525

### Benchmarks using both Fortran and C:

435.gromacs: -O3 -OPT:rsqrt=2 -OPT:ro=3

436.cactusADM: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-LNO:prefetch\_ahead=5 -LNO:ou\_prod\_max=10 -LNO:full\_unroll=5  
-ipa

454.calculix: -Ofast -CG:prefetch=off -LNO:simd=0 -OPT:unroll\_times\_max=8  
-WOPT:mem\_opnds=on

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro  
Motherboard H8DM3-2

SPECfp\_rate2006 = 50.2

SPECfp\_rate\_base2006 = 47.6

CPU2006 license: 1176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Mar-2007  
Hardware Availability: Jan-2007  
Software Availability: Aug-2006

## Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

## Peak Other Flags

C benchmarks:  
-IPA:max\_jobs=2

C++ benchmarks:  
-IPA:max\_jobs=2

Fortran benchmarks:  
-IPA:max\_jobs=2

Benchmarks using both Fortran and C:  
-IPA:max\_jobs=2

The flags file that was used to format this result can be browsed at  
[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.25.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.25.html)

You can also download the XML flags source by saving the following link:  
[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.25.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.25.xml)

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.1.  
Report generated on Tue Sep 13 11:21:18 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 12 June 2007.