



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro Motherboard X7DB3

SPECint®_rate2006 = 82.4

SPECint_rate_base2006 = 79.9

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2007

Hardware Availability: May-2007

Software Availability: Apr-2007

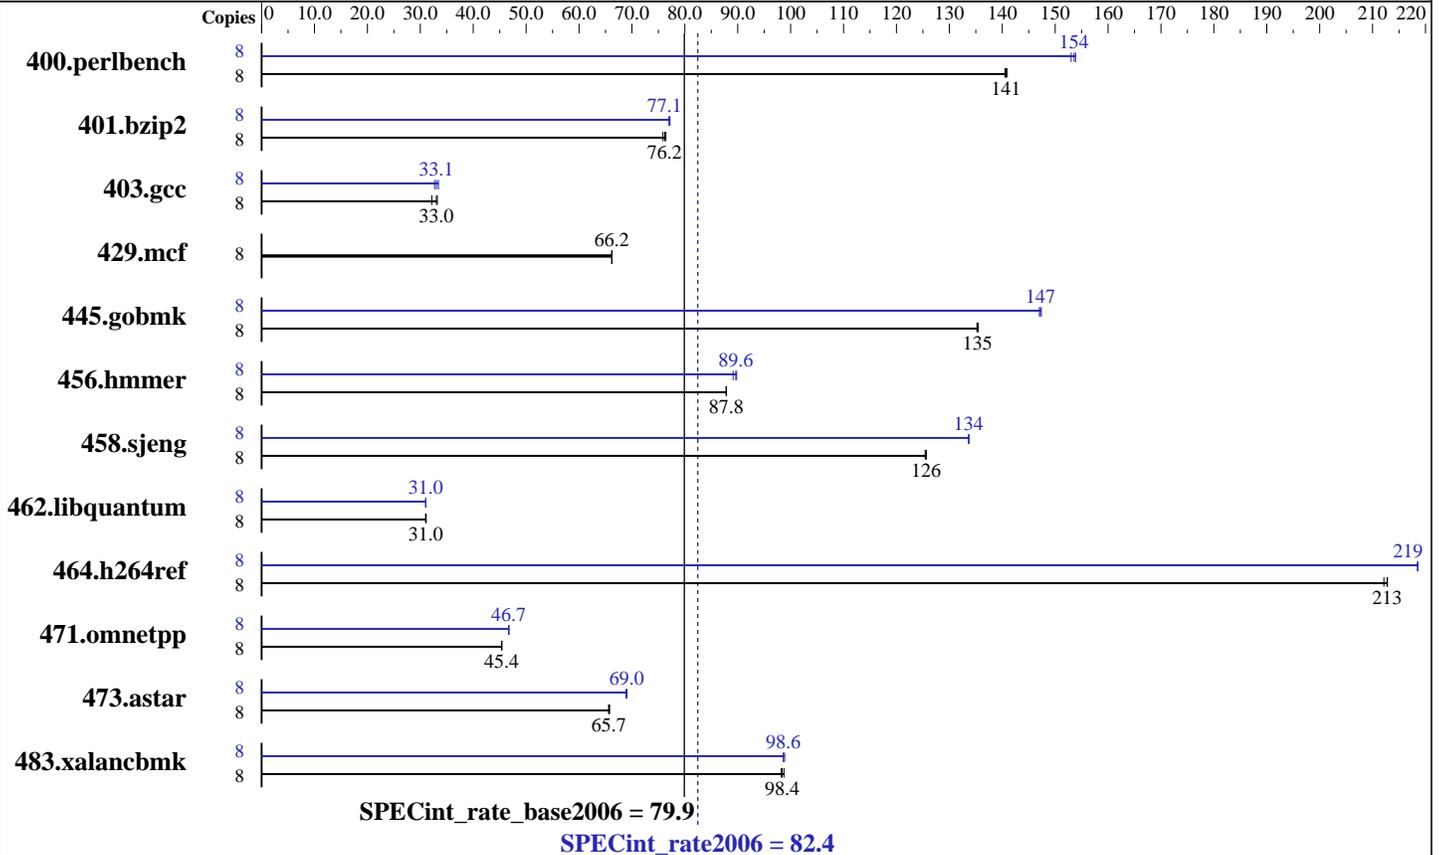

Hardware

CPU Name: Intel Xeon X5355
 CPU Characteristics: 2.66GHz, 1333 MHz bus
 CPU MHz: 2660
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 8 GB (8 X 1GB ECC PC2-5300, CL5, FBDIMM)
 Disk Subsystem: WD2500YS-01SHB1 250GB SATA II, 7200RPM, 4 * ST316081 160GB SATA RAID-10
 Other Hardware: None

Software

Operating System: Windows Server 2003 Enterprise Edition W/ SP1
 Compiler: Intel C++ Compiler for IA32 version 9.1
 Build no 20070322Z
 Microsoft Visual Studio .Net 2003 (for libraries)
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: SmartHeap Library Version 8.0 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro Motherboard X7DB3

SPECint_rate2006 = 82.4

SPECint_rate_base2006 = 79.9

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Apr-2007
Hardware Availability: May-2007
Software Availability: Apr-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	556	141	556	141	555	141	8	511	153	509	154	508	154
401.bzip2	8	1013	76.2	1018	75.9	1010	76.4	8	1003	77.0	1000	77.2	1001	77.1
403.gcc	8	2001	32.2	1950	33.0	1939	33.2	8	1926	33.4	1969	32.7	1948	33.1
429.mcf	8	1102	66.2	1102	66.2	1102	66.2	8	1102	66.2	1102	66.2	1102	66.2
445.gobmk	8	620	135	619	135	621	135	8	571	147	570	147	569	147
456.hammer	8	850	87.8	850	87.8	849	87.9	8	833	89.6	837	89.1	831	89.8
458.sjeng	8	772	125	771	126	771	126	8	724	134	724	134	724	134
462.libquantum	8	5342	31.0	5345	31.0	5329	31.1	8	5343	31.0	5345	31.0	5341	31.0
464.h264ref	8	835	212	832	213	832	213	8	810	219	810	219	810	219
471.omnetpp	8	1102	45.4	1102	45.4	1101	45.4	8	1070	46.7	1070	46.7	1070	46.7
473.astar	8	854	65.8	856	65.6	855	65.7	8	813	69.1	813	69.0	816	68.9
483.xalancbmk	8	562	98.2	561	98.4	559	98.7	8	560	98.6	560	98.6	558	98.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Tested systems can be used with CSE-825TQ-R700LPV case,
To ensure system stability, a 500W (minimum) ATX power supply [4-pin (+12V), 8-pin (+12V) and 24-pin are required]
Product description located as of <http://www.supermicro.com/products/motherboard/Xeon1333/5000P/X7DB3.cfm>
The system bus runs at 1333 MHz

Base Compiler Invocation

C benchmarks:
icl -Qvc7.1 -Qc99

C++ benchmarks:
icl -Qvc7.1

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32

Base Optimization Flags

C benchmarks:
-fast /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro
Motherboard X7DB3**

SPECint_rate2006 = 82.4

SPECint_rate_base2006 = 79.9

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Apr-2007
Hardware Availability: May-2007
Software Availability: Apr-2007

Base Optimization Flags (Continued)

C++ benchmarks:
-fast -Qcxx_features /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks:
icl -Qvc7.1 -Qc99

C++ benchmarks:
icl -Qvc7.1

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32

Peak Optimization Flags

C benchmarks:
400.perlbench: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F512000000
shlw32m.lib -link /FORCE:MULTIPLE
401.bzip2: Same as 400.perlbench
403.gcc: Same as 400.perlbench
429.mcf: basepeak = yes
445.gobmk: Same as 400.perlbench
456.hmmmer: Same as 400.perlbench
458.sjeng: Same as 400.perlbench

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro
Motherboard X7DB3**

SPECint_rate2006 = 82.4

SPECint_rate_base2006 = 79.9

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Apr-2007
Hardware Availability: May-2007
Software Availability: Apr-2007

Peak Optimization Flags (Continued)

462.libquantum: Same as 400.perlbench

464.h264ref: Same as 400.perlbench

C++ benchmarks:

471.omnetpp: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qcxx_features
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

473.astar: -Qprof_gen(pass 1) -Qprof_use(pass 2) -QxP -O2 -Qipo
-Qprec-div- -Qunroll14 -Ob2 -Qsfa16 -Qcxx_features
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

483.xalancbmk: Same as 471.omnetpp

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic91-ia32-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic91-ia32-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:19:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 July 2007.