SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer Altos R520 (Intel Xeon E5320)

SPECint®_rate2006 = 74.1

SPECint_rate_base2006 = 68.4

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Aug-2007
Hardware Availability: Nov-2006
Software Availability: Jun-2007

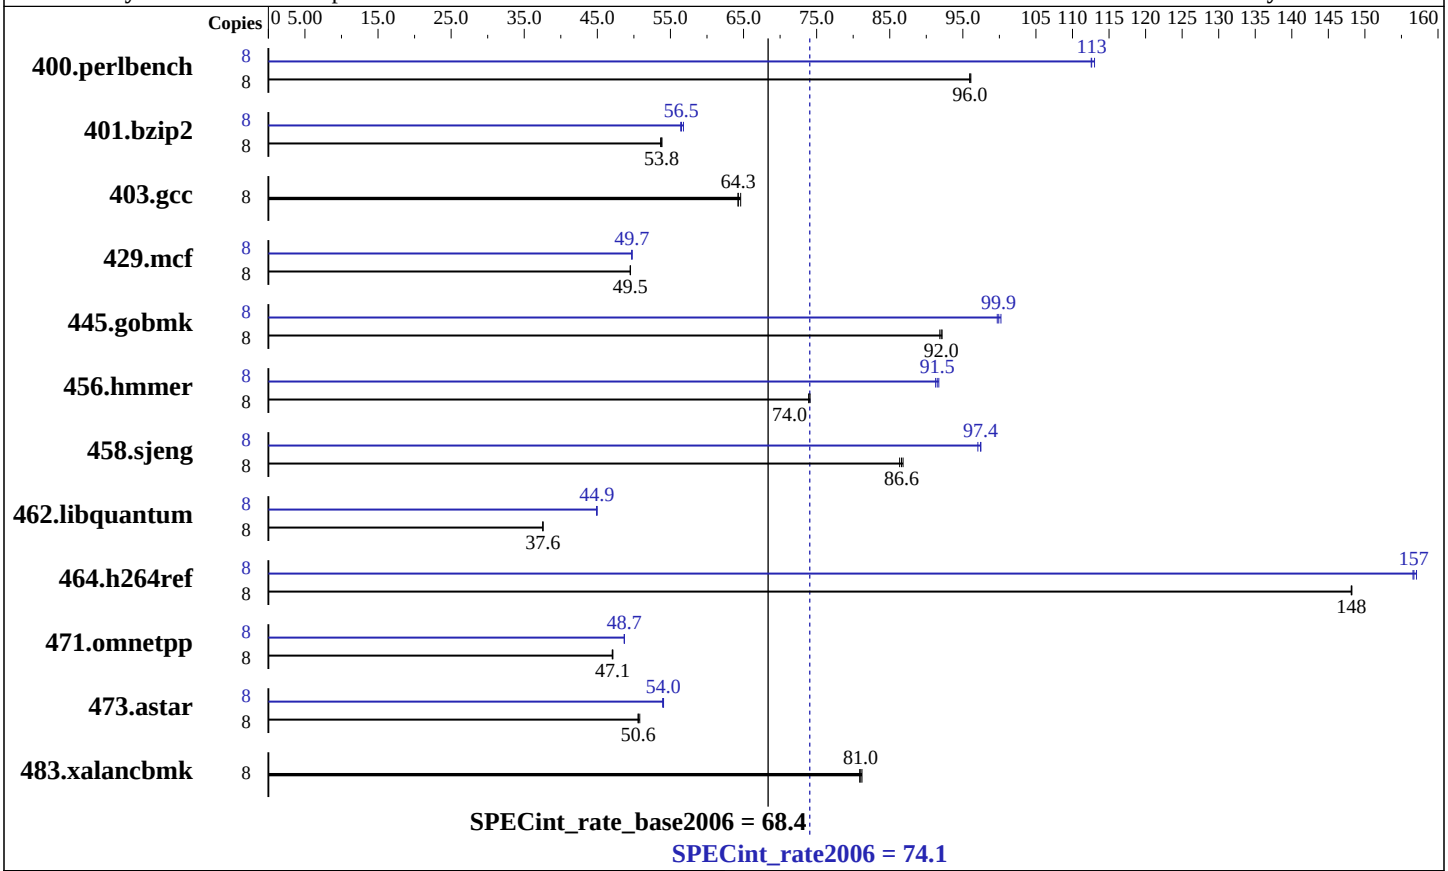

Hardware

CPU Name:	Intel Xeon E5320
CPU Characteristics:	1066MHz system bus
CPU MHz:	1860
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1, 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 x 2048MB ECC FB-DIMM DDR2-667 CL5-5-5)
Disk Subsystem:	1 x 73GB 10000RPM SAS HDD
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 10 EM64T (kernel 2.6.16.21-0.8-smp)
Compiler:	Intel C++ Compiler for Linux32 and Linux64 version 10.0 Build 20070426 Package ID: l_cc_p_10.0.023
Auto Parallel:	No
File System:	ReiserFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap Library 8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer Altos R520 (Intel Xeon E5320)

SPECint_rate2006 = 74.1

SPECint_rate_base2006 = 68.4

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Aug-2007
Hardware Availability: Nov-2006
Software Availability: Jun-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	813	96.1	**814**	**96.0**	815	95.9	8	692	113	**694**	**113**	694	113
401.bzip2	8	1439	53.7	1434	53.8	**1435**	**53.8**	8	1360	56.8	**1366**	**56.5**	1369	56.4
403.gcc	8	1003	64.2	997	64.6	**1002**	**64.3**	8	1003	64.2	997	64.6	**1002**	**64.3**
429.mcf	8	1474	49.5	1473	49.5	**1474**	**49.5**	8	**1467**	**49.7**	1466	49.8	1468	49.7
445.gobmk	8	911	92.2	**912**	**92.0**	914	91.8	8	**840**	**99.9**	837	100	842	99.7
456.hmmer	8	**1009**	**74.0**	1010	73.9	1007	74.1	8	**816**	**91.5**	814	91.7	818	91.3
458.sjeng	8	1115	86.8	1121	86.4	**1118**	**86.6**	8	997	97.1	993	97.5	**994**	**97.4**
462.libquantum	8	4414	37.5	4413	37.6	**4414**	**37.6**	8	**3689**	**44.9**	3692	44.9	3686	45.0
464.h264ref	8	**1195**	**148**	1195	148	1194	148	8	**1130**	**157**	1131	157	1127	157
471.omnetpp	8	1061	47.1	1063	47.0	**1062**	**47.1**	8	1027	48.7	1027	48.7	**1027**	**48.7**
473.astar	8	1105	50.8	1111	50.6	**1109**	**50.6**	8	1041	53.9	**1039**	**54.0**	1039	54.1
483.xalancbmk	8	680	81.2	682	80.9	**681**	**81.0**	8	680	81.2	682	80.9	**681**	**81.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
This result was measured on the Acer Altos R520
The Altos R720 and Altos R520 are electronically equivalent.

BIOS settings
Hardware Prefetch is set to disabled
Adjacent Cache Line Prefetch is set to disabled
taskset was used to bind processes to cores
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-fast`

C++ benchmarks:
`-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs`
`-L/spec/cpu2006.1.0/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

401.bzip2: `/opt/intel/cce/10.0.023/bin/icc`
`-L/opt/intel/cce/10.0.023/lib`
`-I/opt/intel/cce/10.0.023/include`

456.hmmer: `/opt/intel/cce/10.0.023/bin/icc`
`-L/opt/intel/cce/10.0.023/lib`
`-I/opt/intel/cce/10.0.023/include`

C++ benchmarks:
`icpc`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -ansi-alias -prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast`

403.gcc: `basepeak = yes`

429.mcf: `-fast -prefetch`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O2 -ipo -no-prec_div -ansi-alias`

456.hmmer: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4`

462.libquantum: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always`

464.h264ref: `Same as 456.hmmer`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec_div -ansi-alias -Wl,-z,muldefs -L/spec/cpu2006.1.0/lib -lsmartheap`

473.astar: `Same as 471.omnetpp`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.16.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.16.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:31:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 September 2007.