



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®_rate2006 = 114

IBM System x3755 (AMD Opteron 8224 SE)

SPECint_rate_base2006 = 105

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: Advanced Micro Devices

Test date: Aug-2007

Hardware Availability: Sep-2007

Software Availability: Oct-2007

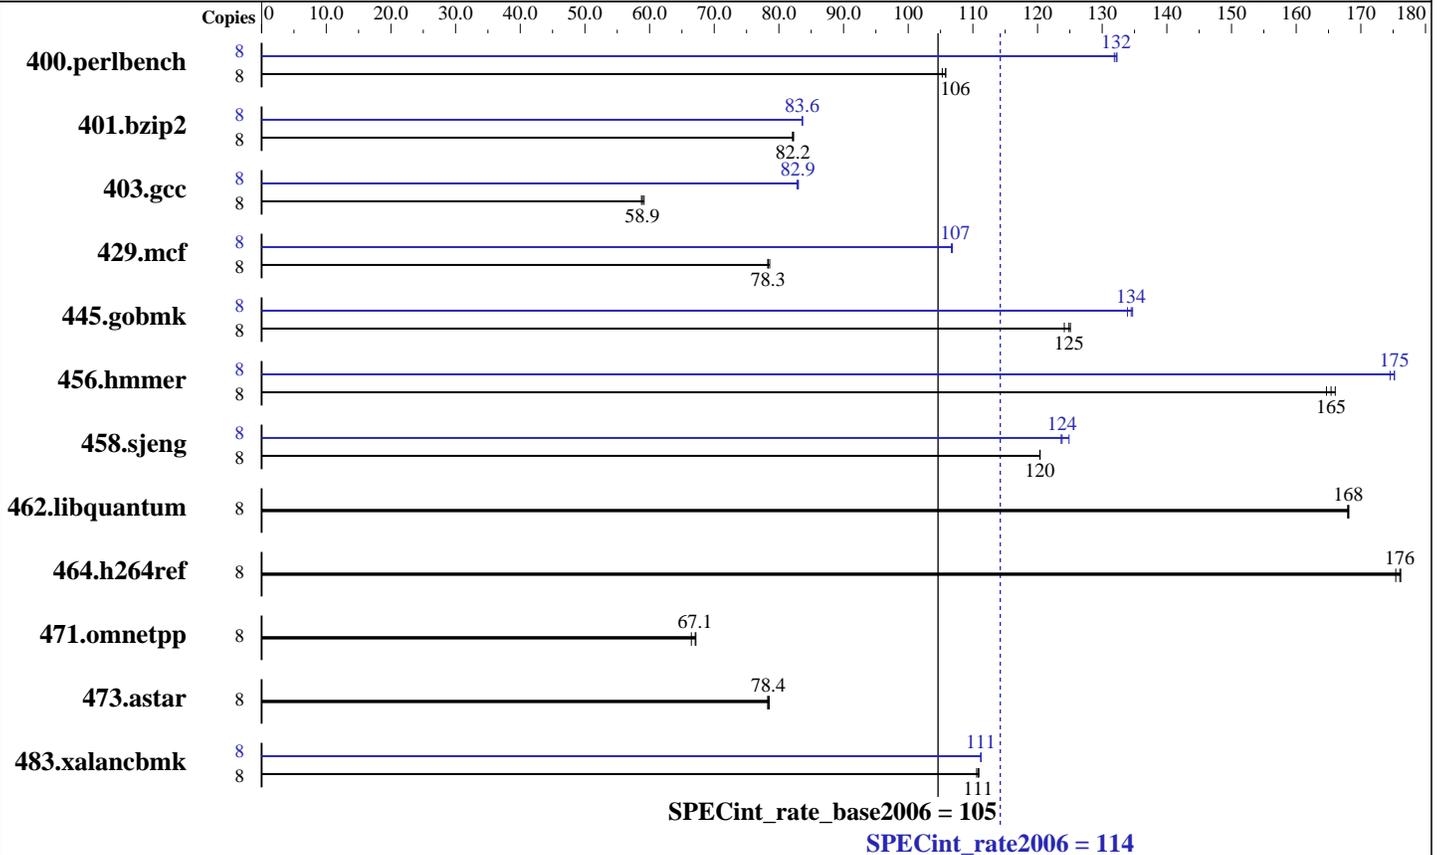

Hardware

CPU Name: AMD Opteron 8224 SE
 CPU Characteristics:
 CPU MHz: 3200
 FPU: Integrated
 CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip
 CPU(s) orderable: 1, 2, 3, 4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core
 L3 Cache: None
 Other Cache: None
 Memory: 32 GB (16 x 2GB, DDR2-667 CL5 ECC REG Dual Rank)
 Disk Subsystem: 1 x 73GB SAS, 15000 RPM
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 SP1 64-bit kernel
 Compiler: The Portland Group (PGI)
 PGI pgcc 7.1-0 C Compiler
 PGI pgCC 7.1-0 C++ Compiler
 Auto Parallel: No
 File System: ext3
 System State: Multi-user, run level 3
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 8.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 114

IBM System x3755 (AMD Opteron 8224 SE)

SPECint_rate_base2006 = 105

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: Advanced Micro Devices

Test date: Aug-2007
Hardware Availability: Sep-2007
Software Availability: Oct-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	739	106	742	105	<u>739</u>	<u>106</u>	8	<u>591</u>	<u>132</u>	593	132	591	132
401.bzip2	8	940	82.1	<u>939</u>	<u>82.2</u>	938	82.3	8	923	83.6	<u>923</u>	<u>83.6</u>	923	83.6
403.gcc	8	1089	59.2	<u>1094</u>	<u>58.9</u>	1096	58.7	8	776	83.0	<u>776</u>	<u>82.9</u>	778	82.8
429.mcf	8	932	78.3	<u>931</u>	<u>78.3</u>	928	78.6	8	683	107	684	107	<u>683</u>	<u>107</u>
445.gobmk	8	671	125	<u>672</u>	<u>125</u>	676	124	8	623	135	627	134	<u>624</u>	<u>134</u>
456.hmmer	8	450	166	453	165	<u>451</u>	<u>165</u>	8	<u>426</u>	<u>175</u>	428	175	426	175
458.sjeng	8	<u>804</u>	<u>120</u>	804	120	804	120	8	775	125	783	124	<u>782</u>	<u>124</u>
462.libquantum	8	986	168	987	168	<u>986</u>	<u>168</u>	8	986	168	987	168	<u>986</u>	<u>168</u>
464.h264ref	8	1005	176	<u>1006</u>	<u>176</u>	1009	175	8	1005	176	<u>1006</u>	<u>176</u>	1009	175
471.omnetpp	8	744	67.2	<u>746</u>	<u>67.1</u>	752	66.5	8	744	67.2	<u>746</u>	<u>67.1</u>	752	66.5
473.astar	8	718	78.3	715	78.5	<u>716</u>	<u>78.4</u>	8	718	78.3	715	78.5	<u>716</u>	<u>78.4</u>
483.xalancbmk	8	498	111	499	111	<u>498</u>	<u>111</u>	8	496	111	<u>496</u>	<u>111</u>	496	111

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Environment stack size set to 'unlimited'
'numactl' was used to bind copies to the cores
Set vm/nr_hugepages=1024 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 114

IBM System x3755 (AMD Opteron 8224 SE)

SPECint_rate_base2006 = 105

CPU2006 license: 11

Test date: Aug-2007

Test sponsor: IBM Corporation

Hardware Availability: Sep-2007

Tested by: Advanced Micro Devices

Software Availability: Oct-2007

Base Portability Flags (Continued)

464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast -Mipa=fast -Mipa=inline -Mipa=noarg -Mfprelaxed
-Msmartalloc=huge:64 -tp k8-64 -Bstatic_pgi

C++ benchmarks:

-fastsse -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc --zc_eh
-tp k8-32 -Bstatic_pgi -lsmarheap

Base Other Flags

C benchmarks:

-w

C++ benchmarks:

-w -L/proj/qa/smarheap/SmartHeap_8/lib

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 114

IBM System x3755 (AMD Opteron 8224 SE)

SPECint_rate_base2006 = 105

CPU2006 license: 11

Test date: Aug-2007

Test sponsor: IBM Corporation

Hardware Availability: Sep-2007

Tested by: Advanced Micro Devices

Software Availability: Oct-2007

Peak Optimization Flags

C benchmarks:

400.perlbench: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=inline(pass 2) -fast
-O4 -Mfprelaxed -Msmartalloc=huge:8 -Mnounroll -tp k8-64
-Bstatic_pgi

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4
-Msmartalloc=huge:64 -tp k8-64 -Bstatic_pgi

403.gcc: -fastsse -Mfprelaxed -Msmartalloc=huge:32 -Mipa=fast
-Mipa=inline -tp k8-32 -Bstatic_pgi

429.mcf: -fastsse -Mipa=fast -Mipa=inline -Msmartalloc=huge:16
-tp k8-32 -Bstatic_pgi

445.gobmk: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2) -fast -O4
-Msmartalloc=huge:32 -Mfprelaxed -Mnovect -tp k8-64
-Bstatic_pgi

456.hmmer: -fast -Msmartalloc=huge:32 -Mfprelaxed -Msafeptr
-Mipa=const -Mipa=ptr -Mipa=arg -tp k8-64 -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mipa=noarg(pass 2) -Mpfo(pass 2) -fast
-Msmartalloc=huge:32 -Mfprelaxed -tp k8-64 -Bstatic_pgi

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: basepeak = yes

483.xalancbmk: -fastsse -O4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc --zc_eh -tp k8-32 -Bstatic_pgi -lsmartheap

Peak Other Flags

C benchmarks:

-w

C++ benchmarks:

-w -L/proj/qa/smartheap/SmartHeap_8/lib



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 114

IBM System x3755 (AMD Opteron 8224 SE)

SPECint_rate_base2006 = 105

CPU2006 license: 11

Test date: Aug-2007

Test sponsor: IBM Corporation

Hardware Availability: Sep-2007

Tested by: Advanced Micro Devices

Software Availability: Oct-2007

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi710_flags.20090714.01.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/pgi710_flags.20090714.01.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:06:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 September 2007.