SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL360 G5
(3.0 GHz, Intel Xeon processor X5365)

SPECfp®_rate2006 = 66.7

SPECfp_rate_base2006 = 62.9

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Aug-2007
Hardware Availability: Sep-2007
Software Availability: Nov-2007

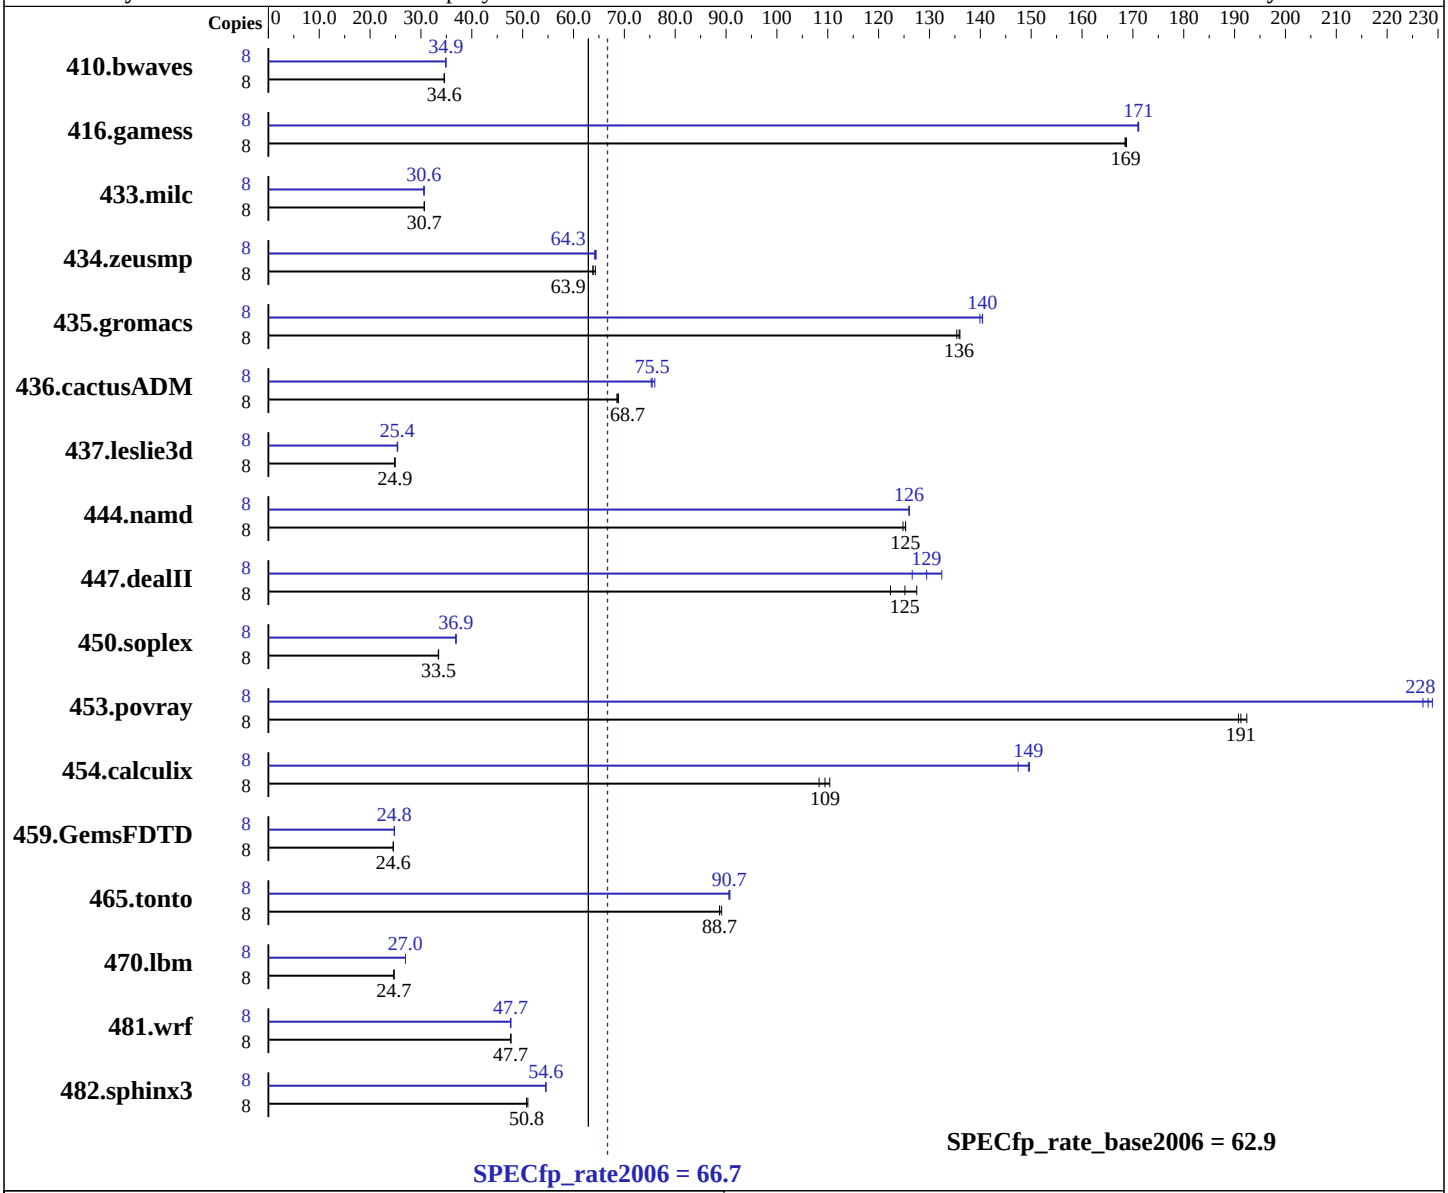

Hardware

CPU Name:	Intel Xeon X5365
CPU Characteristics:	3.0 GHz, 2x4 MB L2 shared, 1333 MHz system bus
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64) SP1 kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070725
Auto Parallel:	No
File System:	ext2
System State:	Multi-user run level 3
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL360 G5
(3.0 GHz, Intel Xeon processor X5365)

SPECfp_rate2006 = 66.7

SPECfp_rate_base2006 = 62.9

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Aug-2007
Hardware Availability: Sep-2007
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2 GB PC2-5300F CL5)
Disk Subsystem: 1x72 GB 15 K SAS
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: binutils-2.17.50

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3144	34.6	3139	34.6	**3143**	**34.6**	8	3116	34.9	3115	34.9	**3115**	**34.9**
416.gamess	8	930	168	**929**	**169**	928	169	8	**915**	**171**	916	171	915	171
433.milc	8	**2394**	**30.7**	2392	30.7	2398	30.6	8	2399	30.6	2400	30.6	**2399**	**30.6**
434.zeusmp	8	1132	64.3	**1140**	**63.9**	1141	63.8	8	1130	64.4	**1132**	**64.3**	1135	64.2
435.gromacs	8	422	135	**421**	**136**	420	136	8	407	140	**407**	**140**	408	140
436.cactusADM	8	1388	68.9	1395	68.5	**1391**	**68.7**	8	1258	76.0	**1267**	**75.5**	1270	75.3
437.leslie3d	8	3020	24.9	3025	24.9	**3024**	**24.9**	8	2967	25.3	**2964**	**25.4**	2957	25.4
444.namd	8	512	125	**512**	**125**	514	125	8	509	126	509	126	**509**	**126**
447.dealII	8	748	122	**731**	**125**	718	127	8	691	132	723	127	**707**	**129**
450.soplex	8	1993	33.5	1997	33.4	**1994**	**33.5**	8	1807	36.9	**1809**	**36.9**	1810	36.9
453.povray	8	223	191	221	192	**223**	**191**	8	**187**	**228**	187	227	186	229
454.calculix	8	598	110	**603**	**109**	609	108	8	448	147	441	150	**442**	**149**
459.GemsFDTD	8	**3455**	**24.6**	3452	24.6	3457	24.6	8	**3426**	**24.8**	3425	24.8	3427	24.8
465.tonto	8	887	88.7	**887**	**88.7**	883	89.1	8	**868**	**90.7**	869	90.6	867	90.8
470.lbm	8	**4452**	**24.7**	4452	24.7	4453	24.7	8	4077	27.0	**4077**	**27.0**	4077	27.0
481.wrf	8	**1875**	**47.7**	1874	47.7	1875	47.7	8	**1875**	**47.7**	1876	47.6	1875	47.7
482.sphinx3	8	3072	50.8	3055	51.0	**3071**	**50.8**	8	2857	54.6	2859	54.5	**2858**	**54.6**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs
```

Platform Notes

```
BIOS configuration:
  Power Regulator set to Static High Performance Mode
  Adjacent Sector Prefetch Disabled
  Hardware Prefetcher Disabled
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

Peak Compiler Invocation

C benchmarks (except as noted below):
```
/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

433.milc: `icc`

C++ benchmarks (except as noted below):
```
icpc
```

450.soplex: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icpc -L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib -I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include`

Fortran benchmarks (except as noted below):
```
ifort
```

437.leslie3d: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/ifort -L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib -I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include`

Benchmarks using both Fortran and C:
```
icc ifort
```

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

470.lbm: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -scalar-rep- -prefetch -opt-malloc-options=3`

482.sphinx3: `-fast -unroll2`

C++ benchmarks:

444.namd: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

447.dealII: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias -scalar-rep-`

450.soplex: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -opt-malloc-options=3`

453.povray: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -ansi-alias`

Fortran benchmarks:

410.bwaves: `-fast -prefetch`

416.gamess: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -ansi-alias -scalar-rep-`

434.zeusmp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast`

437.leslie3d: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -opt-malloc-options=3`

459.GemsFDTD: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -prefetch`

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -prefetch -auto-ilp32`

454.calculix: `-fast -unroll-aggressive -auto-ilp32`

481.wrf: `-fast -auto-ilp32`

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-flags.20090714.01.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-flags.20090714.01.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 12:38:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 September 2007.