SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL465c
(3.0GHz AMD Opteron 2222)

SPECint®_rate2006 = 58.9

SPECint_rate_base2006 = 54.4

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Aug-2007
Hardware Availability: Sep-2007
Software Availability: Oct-2007

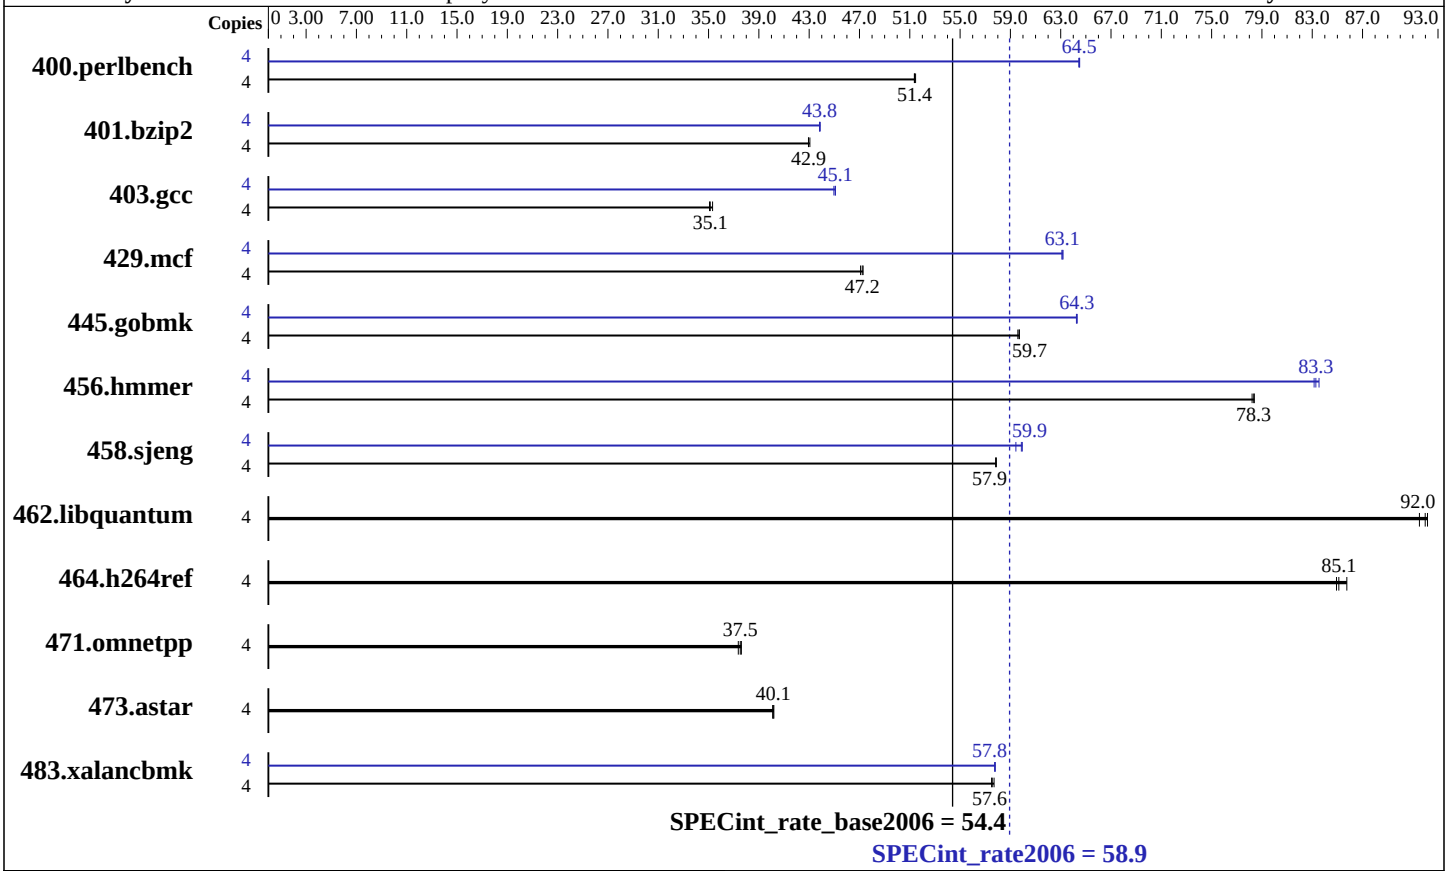

Hardware

CPU Name:	AMD Opteron 2222
CPU Characteristics:	
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	None
Other Cache:	None
Memory:	32 GB (8x4 GB, PC2-5300P CL5)
Disk Subsystem:	1x72 GB 10 K SAS
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64) SP1 kernel 2.6.16.46-0.12-smp
Compiler:	The Portland Group (PGI) PGI pgcc 7.1-0 C Compiler PGI pgCC 7.1-0 C++ Compiler
Auto Parallel:	No
File System:	ext2
System State:	Multi-user, run level 3
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 8.0 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL465c
(3.0GHz AMD Opteron 2222)

SPECint_rate2006 = 58.9

SPECint_rate_base2006 = 54.4

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Aug-2007
Hardware Availability: Sep-2007
Software Availability: Oct-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	759	51.5	761	51.4	**761**	**51.4**	4	**606**	**64.5**	606	64.5	606	64.4
401.bzip2	4	897	43.1	**899**	**42.9**	899	42.9	4	880	43.9	**881**	**43.8**	881	43.8
403.gcc	4	912	35.3	918	35.1	**916**	**35.1**	4	714	45.1	716	45.0	**714**	**45.1**
429.mcf	4	771	47.3	**773**	**47.2**	775	47.1	4	578	63.1	**578**	**63.1**	577	63.2
445.gobmk	4	**703**	**59.7**	704	59.6	703	59.7	4	**653**	**64.3**	653	64.3	653	64.3
456.hmmer	4	477	78.2	**476**	**78.3**	476	78.4	4	**448**	**83.3**	449	83.1	447	83.5
458.sjeng	4	837	57.8	836	57.9	**837**	**57.9**	4	814	59.4	**808**	**59.9**	807	59.9
462.libquantum	4	899	92.2	**901**	**92.0**	906	91.5	4	899	92.2	**901**	**92.0**	906	91.5
464.h264ref	4	1032	85.8	1042	84.9	**1040**	**85.1**	4	1032	85.8	1042	84.9	**1040**	**85.1**
471.omnetpp	4	665	37.6	**666**	**37.5**	669	37.4	4	665	37.6	**666**	**37.5**	669	37.4
473.astar	4	699	40.2	**700**	**40.1**	700	40.1	4	699	40.2	**700**	**40.1**	700	40.1
483.xalancbmk	4	**480**	**57.6**	478	57.7	480	57.5	4	478	57.8	478	57.8	**478**	**57.8**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Environment stack size set to 'unlimited'
ulimit -l set to 1048576
'numactl' was used to bind copies to the cores
Set vm/nr_hugepages=1024 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -Mipa=fast -Mipa=inline -Mipa=noarg -Mfprelaxed
-Msmartalloc=huge:64 -tp k8-64 -Bstatic_pgi

C++ benchmarks:
-fastsse -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc --zc_eh
-tp k8-32 -Bstatic_pgi -lsmartheap

Base Other Flags

C benchmarks:
-w

C++ benchmarks:
-w -L/proj/qa/smartheap/SmartHeap_8/lib

Peak Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: `-Mpfi`(pass 1) `-Mpfo`(pass 2) `-Mipa=inline`(pass 2) `-fast -O4 -Mfprelaxed -Msmartalloc=huge:8 -Mnounroll -tp k8-64 -Bstatic_pgi`

401.bzip2: `-Mpfi`(pass 1) `-Mpfo`(pass 2) `-fast -O4 -Msmartalloc=huge:64 -tp k8-64 -Bstatic_pgi`

403.gcc: `-fastsse -Mfprelaxed -Msmartalloc=huge:32 -Mipa=fast -Mipa=inline -tp k8-32 -Bstatic_pgi`

429.mcf: `-fastsse -Mipa=fast -Mipa=inline -Msmartalloc=huge:16 -tp k8-32 -Bstatic_pgi`

445.gobmk: `-Mpfi`(pass 1) `-Mpfo`(pass 2) `-Mipa=fast`(pass 2) `-fast -O4 -Msmartalloc=huge:32 -Mfprelaxed -Mnovect -tp k8-64 -Bstatic_pgi`

456.hmmer: `-fast -Msmartalloc=huge:32 -Mfprelaxed -Msafeptr -Mipa=const -Mipa=ptr -Mipa=arg -tp k8-64 -Bstatic_pgi`

458.sjeng: `-Mpfi`(pass 1) `-Mipa=fast`(pass 2) `-Mipa=inline`(pass 2) `-Mipa=noarg`(pass 2) `-Mpfo`(pass 2) `-fast -Msmartalloc=huge:32 -Mfprelaxed -tp k8-64 -Bstatic_pgi`

462.libquantum: `basepeak = yes`

464.h264ref: `basepeak = yes`

C++ benchmarks:

471.omnetpp: `basepeak = yes`

473.astar: `basepeak = yes`

483.xalancbmk: `-fastsse -O4 -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc --zc_eh -tp k8-32 -Bstatic_pgi -lsmartheap`

Peak Other Flags

C benchmarks:
`-w`

C++ benchmarks:
`-w -L/proj/qa/smartheap/SmartHeap_8/lib`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/hp-pgi710_flags.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/hp-pgi710_flags.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:29:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 September 2007.