SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL465c
(3.0GHz AMD Opteron 2222)

SPECfp®_rate2006 = 52.5

SPECfp_rate_base2006 = 51.6

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Aug-2007
Hardware Availability: Sep-2007
Software Availability: Oct-2007

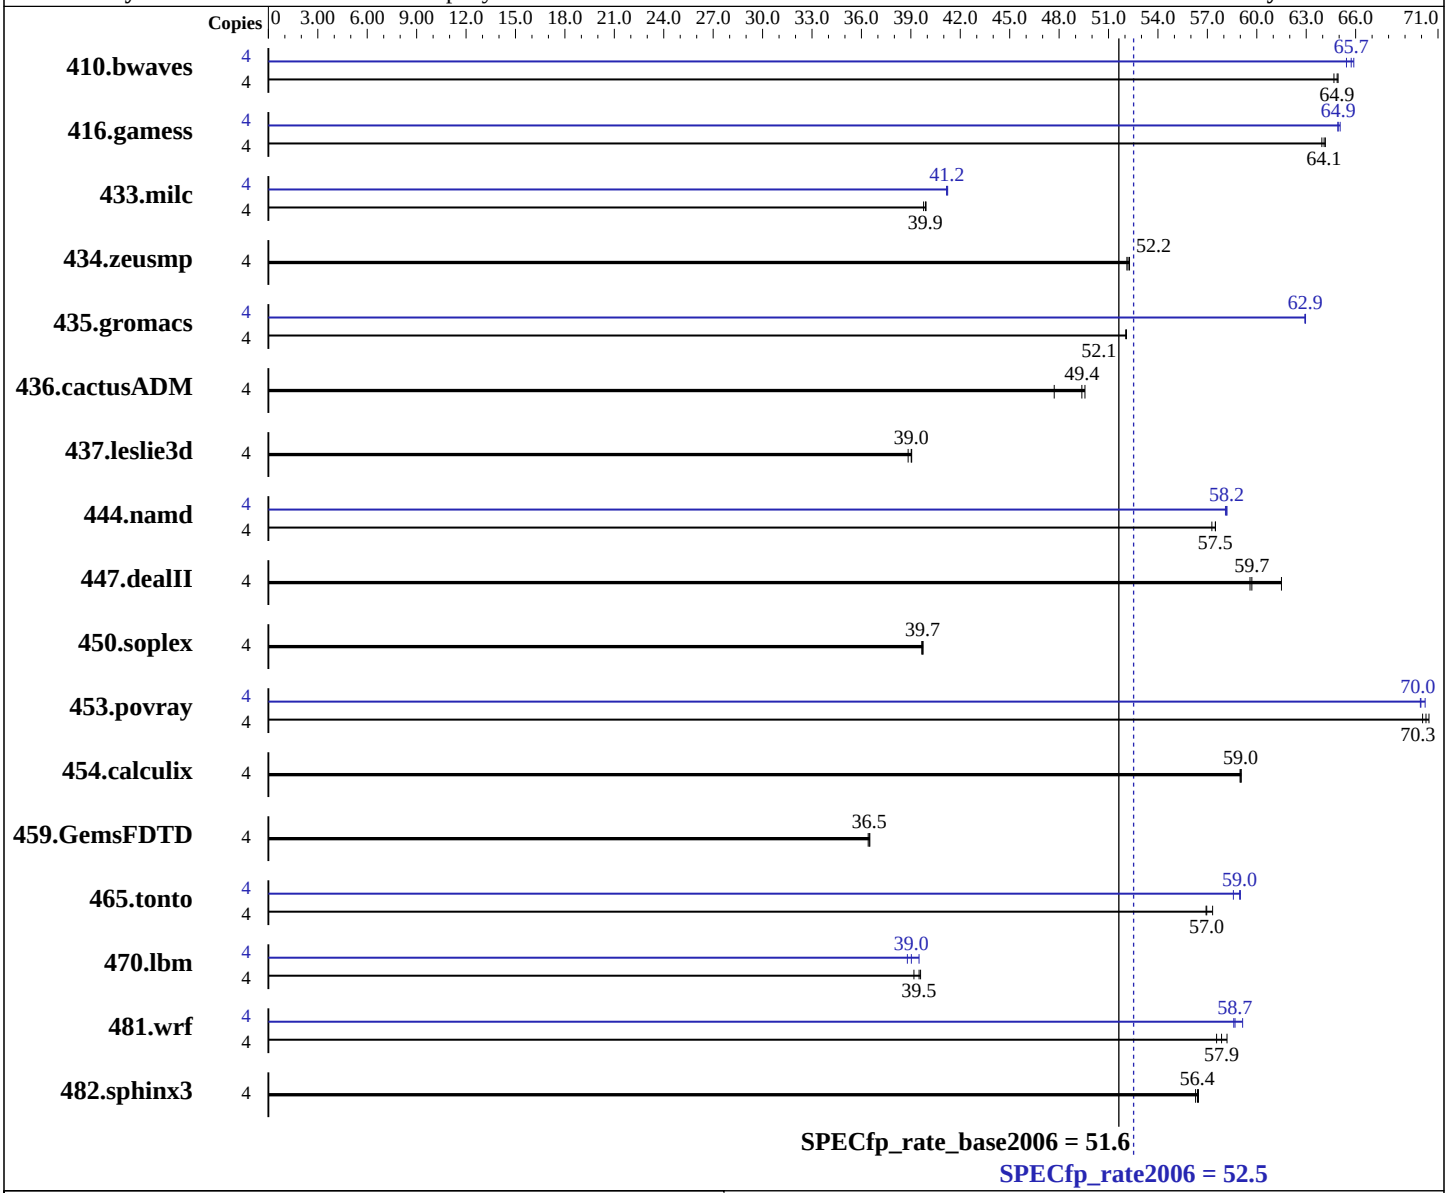

Hardware

CPU Name:	AMD Opteron 2222
CPU Characteristics:	
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64) SP1 kernel 2.6.16.46-0.12-smp
Compiler:	The Portland Group (PGI) PGI pgf90 7.1-0 Fortran Compiler PGI pgcc 7.1-0 C Compiler PGI pgCC 7.1-0 C++ Compiler
Auto Parallel:	No
File System:	ext2
System State:	Multi-user, run level 3

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL465c
(3.0GHz AMD Opteron 2222)

SPECfp_rate2006 = 52.5

SPECfp_rate_base2006 = 51.6

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Aug-2007
Hardware Availability: Sep-2007
Software Availability: Oct-2007

L3 Cache: None
Other Cache: None
Memory: 32 GB (8x4 GB, PC2-5300P CL5)
Disk Subsystem: 1x72 GB 10 K SAS
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 64-bit
Other Software: none

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	837	64.9	**838**	**64.9**	840	64.7	4	831	65.4	825	65.9	**827**	**65.7**
416.gamess	4	1221	64.2	**1222**	**64.1**	1225	63.9	4	1206	64.9	**1206**	**64.9**	1204	65.1
433.milc	4	923	39.8	**921**	**39.9**	920	39.9	4	892	41.2	**891**	**41.2**	891	41.2
434.zeusmp	4	696	52.3	**697**	**52.2**	698	52.1	4	696	52.3	**697**	**52.2**	698	52.1
435.gromacs	4	**549**	**52.1**	548	52.1	549	52.1	4	454	62.9	**454**	**62.9**	454	63.0
436.cactusADM	4	**968**	**49.4**	1002	47.7	964	49.6	4	**968**	**49.4**	1002	47.7	964	49.6
437.leslie3d	4	**964**	**39.0**	963	39.1	968	38.8	4	**964**	**39.0**	963	39.1	968	38.8
444.namd	4	558	57.5	**558**	**57.5**	560	57.3	4	**552**	**58.2**	551	58.2	552	58.1
447.dealII	4	**766**	**59.7**	768	59.6	744	61.5	4	**766**	**59.7**	768	59.6	744	61.5
450.soplex	4	841	39.7	**840**	**39.7**	839	39.7	4	841	39.7	**840**	**39.7**	839	39.7
453.povray	4	302	70.5	304	70.1	**303**	**70.3**	4	303	70.2	**304**	**70.0**	304	69.9
454.calculix	4	559	59.1	**559**	**59.0**	559	59.0	4	559	59.1	**559**	**59.0**	559	59.0
459.GemsFDTD	4	**1163**	**36.5**	1162	36.5	1166	36.4	4	**1163**	**36.5**	1162	36.5	1166	36.4
465.tonto	4	**691**	**57.0**	691	56.9	687	57.3	4	667	59.0	672	58.6	**668**	**59.0**
470.lbm	4	1388	39.6	**1391**	**39.5**	1403	39.2	4	1391	39.5	**1408**	**39.0**	1417	38.8
481.wrf	4	**772**	**57.9**	776	57.6	768	58.2	4	755	59.1	762	58.6	**761**	**58.7**
482.sphinx3	4	1381	56.5	1385	56.3	**1382**	**56.4**	4	1381	56.5	1385	56.3	**1382**	**56.4**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Environment stack size set to 'unlimited'
ulimit -l set to 1048576
'numactl' was used to bind copies to the cores
Set vm/nr_hugepages=1024 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Base Compiler Invocation

C benchmarks:
pgcc

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
pgcpp

Fortran benchmarks:
pgf95

Benchmarks using both Fortran and C:
pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:8
-tp k8-64 -Bstatic_pgi

C++ benchmarks:
-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:8
--zc_eh -tp k8-64 -Bstatic_pgi

Fortran benchmarks:
-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:8
-tp k8-64 -Bstatic_pgi

Benchmarks using both Fortran and C:
-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:8
-tp k8-64 -Bstatic_pgi

Base Other Flags

C benchmarks:
`-w`

C++ benchmarks:
`-w`

Fortran benchmarks:
`-w`

Benchmarks using both Fortran and C:
`-w`

Peak Compiler Invocation

C benchmarks:
`pgcc`

C++ benchmarks:
`pgcpp`

Fortran benchmarks:
`pgf95`

Benchmarks using both Fortran and C:
`pgcc pgf95`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

433.milc: `-Mpfi`(pass 1) `-Mipa=fast`(pass 2) `-Mipa=inline`(pass 2) `-Mipa=noarg`(pass 2) `-Mpfo`(pass 2) `-fast -O4 -Mdse -Mfprelaxed -Msmartalloc=huge:8 -tp k8-64 -Bstatic_pgi`

470.lbm: `-fast -Mfprelaxed -Msmartalloc=huge:8 -Mipa=fast -Mipa=noarg -tp k8-64 -Bstatic_pgi`

482.sphinx3: `basepeak = yes`

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: `-Mpfi`(pass 1) `-Mpfo`(pass 2) `-Mipa=fast`(pass 2) `-Mipa=inline`(pass 2) `-fast -O4 -Mfprelaxed -Msmartalloc=huge:32 --zc_eh -tp k8-64 -Bstatic_pgi`

447.dealII: `basepeak = yes`

450.soplex: `basepeak = yes`

453.povray: `-fast -Mfprelaxed -Msmartalloc=huge:32 -Mipa=fast -Mipa=inline --zc_eh -tp k8-64 -Bstatic_pgi`

Fortran benchmarks:

410.bwaves: `-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc -tp k8-64 -Bstatic_pgi`

416.gamess: `-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Mvect=noaltcode -Msmartalloc=huge:64 -tp k8-64 -Bstatic_pgi`

434.zeusmp: `basepeak = yes`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `basepeak = yes`

465.tonto: `-fast -Mfprelaxed -Msmartalloc=huge:128 -Mipa=fast -Mipa=inline -Mvect=noaltcode -tp k8-64 -Bstatic_pgi`

Benchmarks using both Fortran and C:

435.gromacs: `-fast -O4 -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:16 -tp k8-64 -Mfpapprox=rsqrt -Bstatic_pgi`

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

481.wrf: `-fast -Mfprelaxed -Msmartalloc=huge:32 -Mvect=noaltcode -tp k8-64 -Bstatic_pgi`

Peak Other Flags

C benchmarks:

`-w`

Continued on next page

Peak Other Flags (Continued)

C++ benchmarks:
`-w`

Fortran benchmarks:
`-w`

Benchmarks using both Fortran and C:
`-w`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/hp-pgi710_flags.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/hp-pgi710_flags.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:30:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 September 2007.