



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 110

PowerEdge 6950 (AMD Opteron 8222 SE, 3.00GHz)

SPECint_rate_base2006 = 102

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2007

Hardware Availability: Apr-2007

Software Availability: Oct-2007

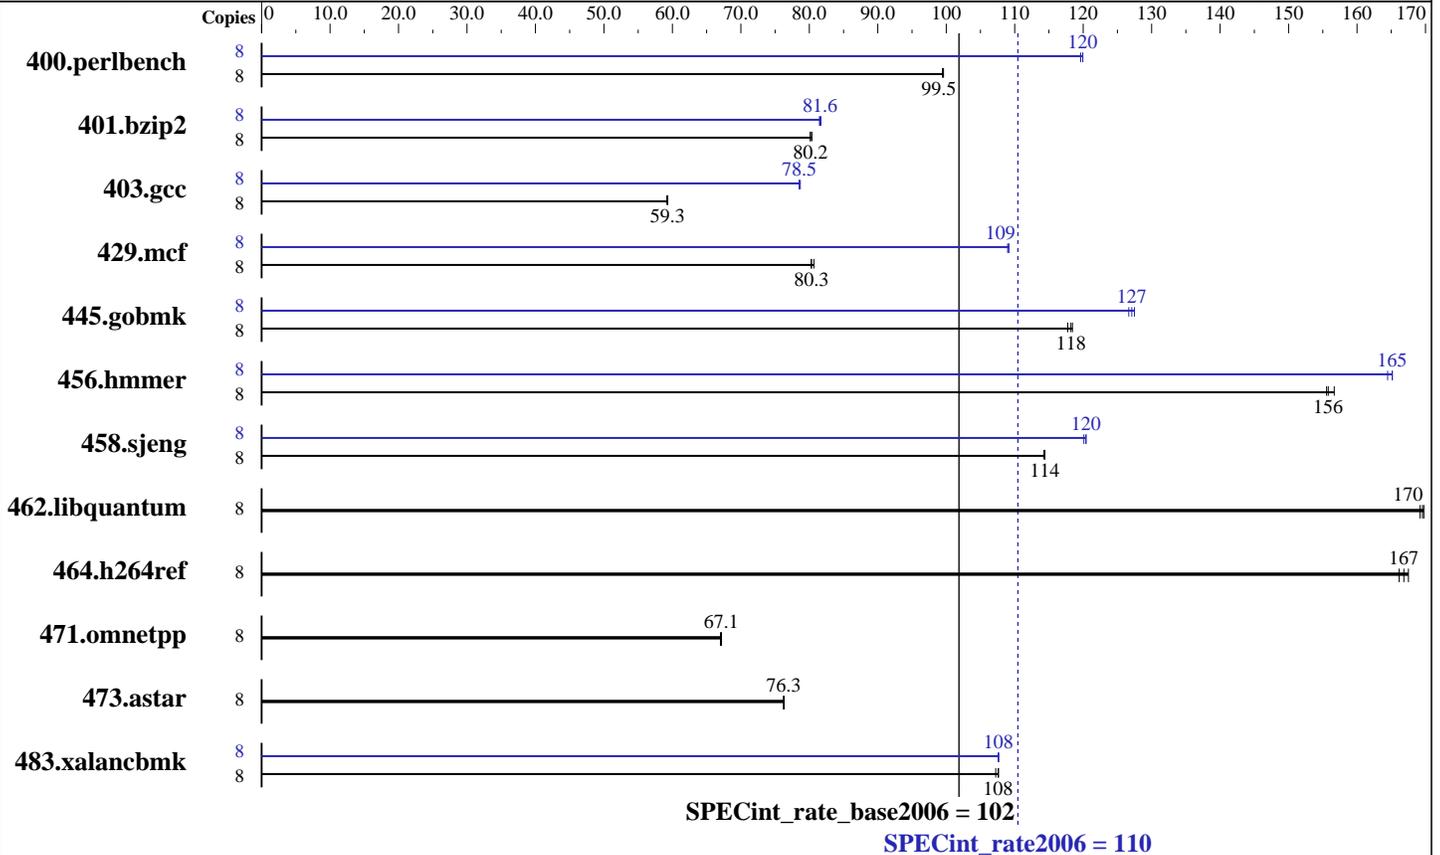

Hardware

CPU Name: AMD Opteron 8222 SE
 CPU Characteristics:
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core
 L3 Cache: None
 Other Cache: None
 Memory: 32 GB (16x2GB, DDR2-667 CL5 ECC Dual Rank)
 Disk Subsystem: 1 x 250 GB SATA 7200 RPM
 Other Hardware: None

Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10
 Compiler: The Portland Group (PGI)
 PGI pgcc 7.1-0 C Compiler
 PGI pgCC 7.1-0 C++ Compiler
 Auto Parallel: No
 File System: ReiserFS
 System State: Multi-user, run level 3
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 8.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 110

PowerEdge 6950 (AMD Opteron 8222 SE, 3.00GHz)

SPECint_rate_base2006 = 102

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Sep-2007
Hardware Availability: Apr-2007
Software Availability: Oct-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	786	99.4	785	99.6	785	99.5	8	653	120	652	120	652	120
401.bzip2	8	963	80.1	960	80.4	963	80.2	8	945	81.7	947	81.5	947	81.6
403.gcc	8	1086	59.3	1088	59.2	1086	59.3	8	820	78.5	818	78.7	820	78.5
429.mcf	8	904	80.7	909	80.3	909	80.3	8	669	109	670	109	669	109
445.gobmk	8	713	118	710	118	709	118	8	660	127	658	127	663	127
456.hmmer	8	479	156	480	156	476	157	8	454	164	452	165	452	165
458.sjeng	8	847	114	846	114	846	114	8	806	120	804	120	804	120
462.libquantum	8	978	170	980	169	976	170	8	978	170	980	169	976	170
464.h264ref	8	1066	166	1057	168	1061	167	8	1066	166	1057	168	1061	167
471.omnetpp	8	744	67.2	746	67.0	745	67.1	8	744	67.2	746	67.0	745	67.1
473.astar	8	737	76.2	736	76.3	737	76.3	8	737	76.2	736	76.3	737	76.3
483.xalancbmk	8	513	108	515	107	513	108	8	513	108	513	108	513	108

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2457600' was used to set environment locked pages in memory quantity
'numactl' was used to bind one copy per core, and memory to a local NUMA node
Set vm/nr_hugepages=1200 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
Environment variable PGI_HUGE_PAGES set to 150

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 110

PowerEdge 6950 (AMD Opteron 8222 SE, 3.00GHz)

SPECint_rate_base2006 = 102

CPU2006 license: 55

Test date: Sep-2007

Test sponsor: Dell Inc.

Hardware Availability: Apr-2007

Tested by: Dell Inc.

Software Availability: Oct-2007

Base Portability Flags (Continued)

458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast -Mipa=fast -Mipa=inline -Mipa=noarg -Mfprelaxed
-Msmartalloc=huge:64 -tp k8-64 -Bstatic_pgi

C++ benchmarks:

-fastsse -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc --zc_eh
-tp k8-32 -Bstatic_pgi -lsmarheap

Base Other Flags

C benchmarks:

-w

C++ benchmarks:

-w -L/proj/qa/smarheap/SmartHeap_8/lib

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 110

PowerEdge 6950 (AMD Opteron 8222 SE, 3.00GHz)

SPECint_rate_base2006 = 102

CPU2006 license: 55

Test date: Sep-2007

Test sponsor: Dell Inc.

Hardware Availability: Apr-2007

Tested by: Dell Inc.

Software Availability: Oct-2007

Peak Optimization Flags

C benchmarks:

400.perlbench: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=inline(pass 2) -fast
-O4 -Mfprelaxed -Msmartalloc=huge:8 -Mnounroll -tp k8-64
-Bstatic_pgi

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4
-Msmartalloc=huge:64 -tp k8-64 -Bstatic_pgi

403.gcc: -fastsse -Mfprelaxed -Msmartalloc=huge:32 -Mipa=fast
-Mipa=inline -tp k8-32 -Bstatic_pgi

429.mcf: -fastsse -Mipa=fast -Mipa=inline -Msmartalloc=huge:16
-tp k8-32 -Bstatic_pgi

445.gobmk: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2) -fast -O4
-Msmartalloc=huge:32 -Mfprelaxed -Mnovect -tp k8-64
-Bstatic_pgi

456.hmmer: -fast -Msmartalloc=huge:32 -Mfprelaxed -Msafeptr
-Mipa=const -Mipa=ptr -Mipa=arg -tp k8-64 -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mipa=noarg(pass 2) -Mpfo(pass 2) -fast
-Msmartalloc=huge:32 -Mfprelaxed -tp k8-64 -Bstatic_pgi

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: basepeak = yes

483.xalancbmk: -fastsse -O4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc --zc_eh -tp k8-32 -Bstatic_pgi -lsmartheap

Peak Other Flags

C benchmarks:

-w

C++ benchmarks:

-w -L/proj/qa/smartheap/SmartHeap_8/lib



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 110

PowerEdge 6950 (AMD Opteron 8222 SE, 3.00GHz)

SPECint_rate_base2006 = 102

CPU2006 license: 55

Test date: Sep-2007

Test sponsor: Dell Inc.

Hardware Availability: Apr-2007

Tested by: Dell Inc.

Software Availability: Oct-2007

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi710_flags.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/pgi710_flags.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:04:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 October 2007.