SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro Motherborad X7DB3

SPECint®_rate2006 = 101

SPECint_rate_base2006 = 85.1

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Oct-2007
Hardware Availability: Nov-2006
Software Availability: Nov-2007

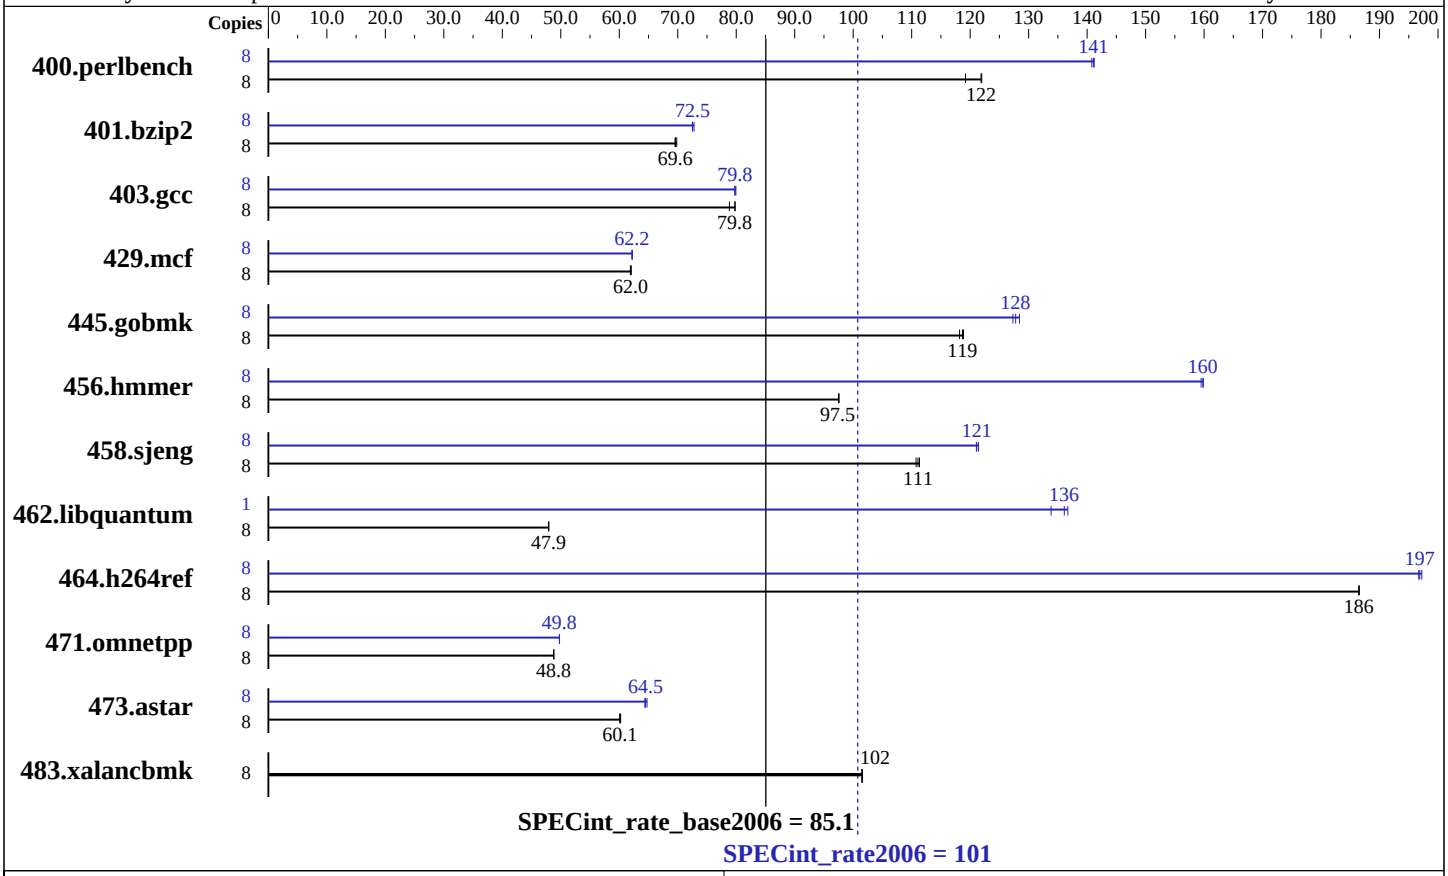

Hardware

CPU Name:	Intel Xeon E5345
CPU Characteristics:	Quad Core, 2.33GHz
CPU MHz:	2333
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1, 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 * 2 GB PC2-5300 FBDIMM, CL-5-5-5, ECC)
Disk Subsystem:	500 GB SATA, 7200RPM
Other Hardware:	None

Software

Operating System:	64-Bit Suse Linux Enterprise Server 10 w/ SP1
Compiler:	Intel C++ Compiler for Linux32 and Linux64 version 10.1 Build 20070725
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-user, run level 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap library V8.1 Binutils 2.17.50.0.15

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro Motherborad X7DB3

SPECint_rate2006 = 101

SPECint_rate_base2006 = 85.1

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Oct-2007
Hardware Availability: Nov-2006
Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	656	119	**641**	**122**	641	122	8	**554**	**141**	555	141	553	141
401.bzip2	8	1106	69.8	**1109**	**69.6**	1110	69.5	8	1061	72.8	1065	72.5	**1064**	**72.5**
403.gcc	8	817	78.8	807	79.8	**807**	**79.8**	8	808	79.7	**807**	**79.8**	806	79.9
429.mcf	8	**1178**	**62.0**	1179	61.9	1176	62.0	8	1173	62.2	**1173**	**62.2**	1173	62.2
445.gobmk	8	706	119	**707**	**119**	710	118	8	**657**	**128**	653	128	659	127
456.hmmer	8	765	97.6	**765**	**97.5**	766	97.5	8	467	160	**467**	**160**	468	159
458.sjeng	8	**871**	**111**	869	111	874	111	8	797	121	800	121	**799**	**121**
462.libquantum	8	3456	48.0	**3460**	**47.9**	3460	47.9	1	**152**	**136**	152	137	155	134
464.h264ref	8	**950**	**186**	950	186	949	187	8	898	197	900	197	**899**	**197**
471.omnetpp	8	1024	48.8	**1025**	**48.8**	1026	48.8	8	1004	49.8	1005	49.8	**1005**	**49.8**
473.astar	8	932	60.2	**934**	**60.1**	935	60.1	8	873	64.4	867	64.8	**871**	**64.5**
483.xalancbmk	8	544	101	543	102	**544**	**102**	8	544	101	543	102	**544**	**102**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Tested systems can be used with CSE-825TQ-R700LPV case,
To ensure system stability, a 500W (minimum) ATX power supply [4-pin (+12V), 8-pin (+12V) and 24-pin are required]
Product description located as of http://www.supermicro.com/products/motherboard/Xeon1333/5000P/X7DB3.cfm
The system bus runs at 1333 MHz
Bios settings:
Hardware Prefetcher:      Enabled
Adjacent Sector Prefetch: Disabled
All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer,
for peak, are compiled in 64-bit mode
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
```
-fast -inline-calloc -opt-malloc-options=3
```

C++ benchmarks:
```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc
```

401.bzip2:
```
/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include
```

456.hmmer:
```
/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include
```

C++ benchmarks:
```
icpc
```

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -ansi-alias -prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch`

403.gcc: `-fast -inline-calloc -opt-malloc-options=3`

429.mcf: `-fast -prefetch`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O2 -ipo -no-prec-div -ansi-alias`

456.hmmer: `-fast -unroll2 -ansi-alias -opt-multi-version-aggressive`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4`

462.libquantum: `-fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control`

464.h264ref: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap`

473.astar: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.17.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.17.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:57:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 October 2007.